





# AC600 Mini Wireless USB Adapter

Mini, Mobile, Mighty

Archer T2U



 433 Mbps on 5 GHz  
200 Mbps on 2.4 GHz

 Turbo QAM  
256QAM  
33% faster on 2.4 GHz


 USB 2.0

# Highlights

## AC600 Dual Band Wi-Fi

The Archer T2U receives Wi-Fi signals on two separate bands. Supporting 256QAM technology increases 2.4 GHz data rate from 150 Mbps to 200 Mbps for 33% faster performance.

Choose the 2.4 GHz band for surfing and social media, and 5 GHz band for HD streaming and lag-free gaming.

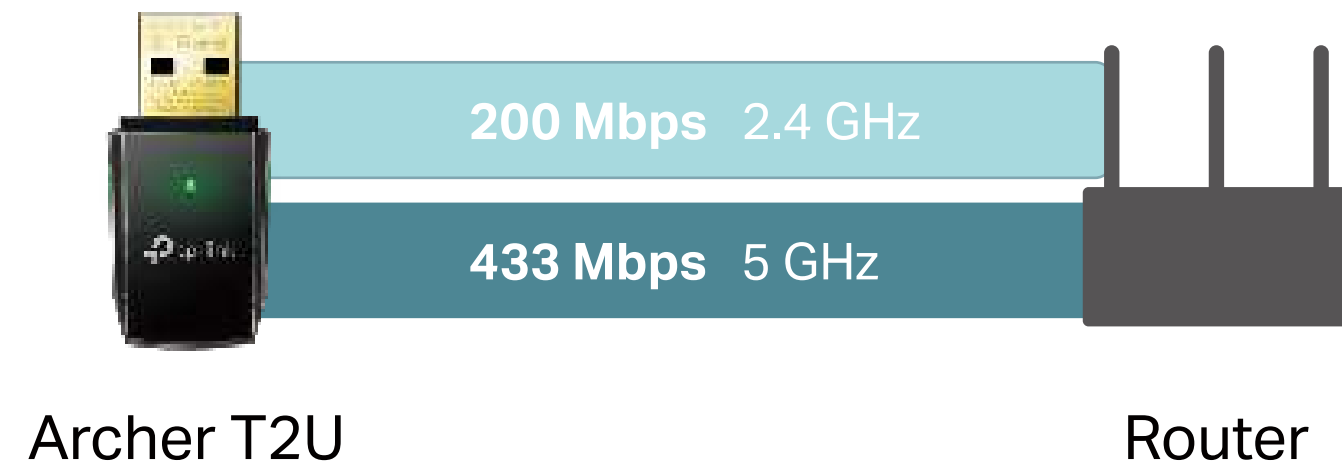


## Mini, Mobile and Mighty

Much smaller than a flash drive, enjoy a stable and fast AC600 Wi-Fi wherever you need it.



40.5mm

VS

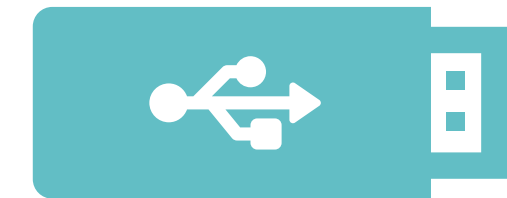

65mm

# Features



## Speed

- **Fast Wi-Fi** – 433 Mbps on 5 GHz and 200 Mbps on 2.4 GHz wireless speeds are ideal for HD streaming video, lag-free gaming and large file downloads
- **802.11ac Support** – Wi-Fi technology that is 3 times faster than 802.11n



## Design

- **Mini design** – The Archer T2U is very small and can be left in a computer's USB port once plugged in



## Reliability

- **Dual Band** – Selectable 2.4 GHz and 5 GHz bands to avoid wireless signal interference



## Ease of Use

- **Backwards Compatibility** – Supports routers utilizing 802.11 a/b/g/n Wi-Fi standards



## Security

- **Active Defense** – WPA/WPA2 encryption provides your Wi-Fi network with advanced protection against security threats

# Specifications

## Wireless

- Wireless Standard: IEEE 802.11b/g/n 2.4 GHz, IEEE 802.11a/n/ac 5 GHz
- Frequency: 2.4 GHz, 5 GHz
- Wireless Security: WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
- Modulation Technology: DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64-QAM, 256-QAM

## Hardware

- Interface: USB 2.0
- LED: Status
- Dimensions: 0.7 × 0.41 × 1.59 in. (19.7 × 10.3 × 40.5 mm)

## Others

- Package Contents
  - AC600 Mini Wireless USB Adapter Archer T2U
  - Quick Installation Guide
  - Resource CD
- Certification
  - FCC, CE, RoHS
- System Requirements
  - Windows 10/8.1/8/7/XP, Mac OS X 10.9-10.14
- Environment
  - Operating Temperature: 0°C ~40°C (32°F ~104°F)
  - Storage Temperature: -40°C ~70°C (-40°F ~158°F)
  - Operating Humidity: 10%~90% non-condensing
  - Storage Humidity: 5%~90% non-condensing



Mac  
Support



For more information, please visit

[https://www.tp-link.com/products/details/Archer-T2U\\_V3.html](https://www.tp-link.com/products/details/Archer-T2U_V3.html)

or scan the QR code left

Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright ©2019 TP-Link Technologies Co., Ltd. All rights reserved.

\*Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage, and quantity of connected devices are not guaranteed and will vary as a result of network conditions, AP limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and AP location.

\*To ensure compatibility, you may need to update the adapter's drivers after an OS update. You can find our latest drivers in the download center at [tp-link.com/en/download-center](http://tp-link.com/en/download-center).

[www.tp-link.com](http://www.tp-link.com)