

\* Picture is for reference only

## View 300 MX

User's Manual  
Benutzerhandbuch  
Mode d'emploi  
Manual del usuario  
Manuale dell'utente  
Manual do Utilizador

安裝說明書  
用戶手冊  
ユーザーズマニュアル  
Руководство пользователя  
kullanıcı elkitabı  
(EEE Yönetmeliğine Uygundur)  
คู่มือการใช้งาน



© 2022 Thermaltake Technology Co., Ltd. All Rights Reserved. 2022.08  
All other registered trademarks belong to their respective companies. [www.thermaltake.com](http://www.thermaltake.com)



## TT Premium



### TT Premium

To continue achieving the corporate mission of delivering the perfect user experience, Thermaltake developed "TT Premium" with the essence of combining supreme quality products with a new logo design. TT Premium is far more than just a guarantee of quality. Behind the name, it represents the passion in DIY, Modding and Thermaltake's desire to be the most innovative brand in the PC hardware market. To satisfy the demand of the high-end PC users, TT Premium follows its core values of Excellent Quality, Unique Design, Diverse Combinations and Boundless Creativity to provide a high performance PC product for every enthusiast. <http://ttpremium.com>

## Tt LCS-Liquid Cooling Support Certification



Tt LCS Certified is a Thermaltake exclusive certification applied to only products that pass the design and hardcore enthusiasts standards that a true LCS chassis should be held to. The Tt LCS certification was created so that we at Thermaltake can designate to all power users which chassis have been tested to be best compatible with extreme liquid cooling configurations to ensure you get the best performance from the best features and fitment.

## Join Tt Community To Receive Benefits



Dear Valued Customer,

Thank you for choosing Thermaltake.

As a new user we value your thoughts and opinions and your feedback is important to us. We at Thermaltake would like to use this opportunity to invite you to join our Community Forums. Register today to start enjoying the full benefits of our community.

Benefits of being a member:

- Quick and responsive user support
- Receive help and advice with new builds
- Keep up to date with new product releases
- Share your thoughts and builds with the community
- Enter monthly contests and giveaways



**Brand official website**  
<http://www.thermaltake.com/>

**Global Facebook**  
<https://www.facebook.com/ThermaltakeInc>

**Taiwan Facebook**  
<http://www.facebook.com/ThermaltakeTW>

**Global community forums**  
<http://community.thermaltake.com>

# CONTENTS











## Chapter 1. Product Introduction

|     |                          |    |
|-----|--------------------------|----|
| 1.0 | Specification .....      | 01 |
| 1.1 | Accessory .....          | 02 |
| 1.2 | Warning and Notice ..... | 03 |




## Chapter 2. Installation Guide

|      |  |    |
|------|--|----|
| 2.0  | Remove Components .....                    | 06 |
| 2.1  | Power Supply Unit (PSU) Installation ..... | 07 |
| 2.2  | Motherboard Installation .....             | 08 |
| 2.3  | 3.5" & 2.5" HDD Installation .....         | 09 |
| 2.4  | PCI Card Installation .....                | 11 |
| 2.5  | Air Cooling Installation .....             | 12 |
| 2.6  | AIO Liquid Cooling Installation .....      | 13 |
| 2.7  | I/O Connection .....                       | 14 |
| 2.8  | Remove Filters .....                       | 15 |
| 2.9  | Panel Installation .....                   | 16 |
| 2.10 | ARGB Control Instruction .....             | 17 |
| 3.0  | PWM ARGB Control Board Connection .....    | 18 |
| 3.1  | Pump Installation .....                    | 19 |


|                   |  |
|-------------------|--|
| Case Type         | Mid Tower  |
| Dimension (H*W*D) | 505 x 230 x 506 mm (19.9 x 9.1 x 19.9 inch)  |
| Side Panel        | Tempered Glass x 1   |
| Material          | SPCC + ABS   |
| Cooling System    | <b>Front (intake):</b><br>200 x 200 x 30 mm ARGB PWM fan (1000 rpm, 35.5 dBA) x 2<br><b>Rear (exhaust):</b><br>120 x 120 x 25 mm ARGB PWM fan (1500 rpm, 27.2 dBA) x 1   |
| Drive Bays        | 2 x 3.5", 4 x 2.5" or 6 x 2.5"   |
| Expansion Slots   | 7 (Rotatable Patented Design)  |
| Motherboards      | 6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX),<br>12" x 9.6" (ATX), 12" x 13" (E-ATX)  |
| I/O Port          | USB 3.2 (Gen 2) Type-C x 1, USB 3.0 x 2, HD Audio x 1  |
| PSU               | Standard PS2 PSU (optional)  |
| Fan Support       | <b>Front:</b> 3 x 120mm, 2 x 120mm, 1 x 120mm<br>3 x 140mm, 2 x 140mm, 1 x 140mm<br>2 x 200mm, 1 x 200mm<br><b>Top:</b> 3 x 120mm, 2 x 120mm, 1 x 120mm,<br>2 x 140mm, 1 x 140mm<br>1 x 200mm<br><b>Right (M/B Side):</b> 3 x 120mm, 2 x 120mm, 1 x 120mm (Without HDD Rack)<br><b>Rear:</b> 1 x 120mm |
| Radiator Support  | <b>Front:</b> 1 x 360mm, 1 x 240mm, 1 x 120mm<br>1 x 280mm, 1 x 140mm<br><b>Top:</b> 1 x 360mm, 1 x 240mm, 1 x 120mm<br>1 x 280mm, 1 x 140mm<br><b>Right (M/B Side):</b> 1 x 360mm, 1 x 240mm, 1 x 120mm (Without HDD Rack)<br><b>Rear:</b> 1 x 120mm  |
| Clearances        | CPU cooler height limitation: 175mm<br>VGA length limitation: 280mm (With reservoir)<br>400mm (Without reservoir)<br>PSU length limitation: 200mm  |

| Figure  | Part Name                | Q'ty | Use For                      |
|---|--------------------------|------|------------------------------|
|  | Screw-off #6-32 x 6.5 mm | 3    | Motherboard                  |
|  | Screw #6-32 x 6 mm       | 4    | Power Supply                 |
|  | Screw #6-32 x 6 mm       | 10   | 3.5" HDD                     |
|  | Screw M3 x 5 mm          | 35   | Motherboard / 2.5" HDD / SSD |
|  | Screw Ø 5 x 10 mm        | 8    | Case Fan                     |
|  | Screw Ø 3 x 8 mm         | 1    | Strip Stand                  |
|  | PSU Cover strip stand    | 1    | VGA bracket base             |
|  | PSU strip stand          | 1    | VGA bracket base             |
|  | Cable ties               | 10   | Cable Management             |
|  | Buzzer                   | 1    | Motherboard Alarm            |


### Additional Perforated Metal Panel

| Figure  | Part Name              | Q'ty | Use For                |
|---|------------------------|------|------------------------|
|  | Perforated Metal Panel | 1    | Front Panel Option     |
|  | Screw Ø 3 x 8 mm       | 3    | Front Panel            |
|  | Screw #6-32 x 6 mm     | 3    | Perforated Metal Panel |


### For ARGB Version Only

| Figure  | Part Name  | Q'ty | Use For         |
|---|--|------|-----------------|
|  | MB Signal Bridge Cable<br>(ASUS/MSI/ASROCK/GIGABYTE) | 1    | LED Signal Sync |


## Chassis dimension

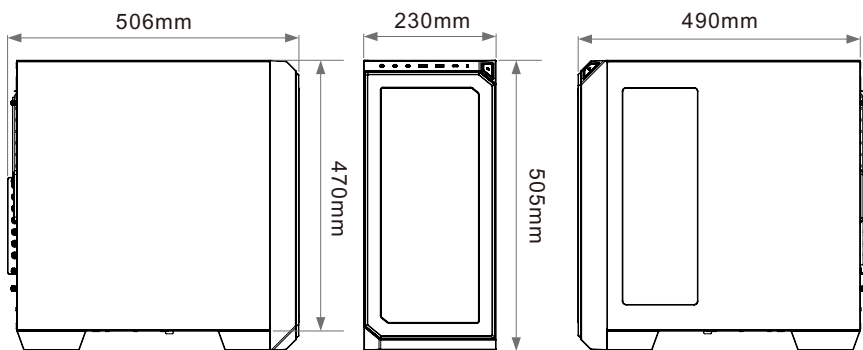


Motherboard Compatibility: ITX / mATX / ATX / E-ATX  
(Up to 330.2mm wide)

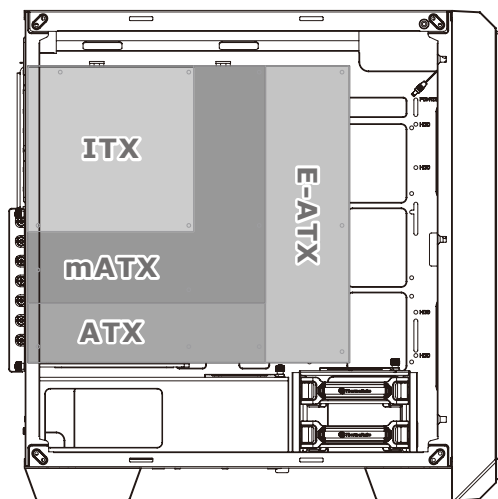



CPU cooler max height: 175mm

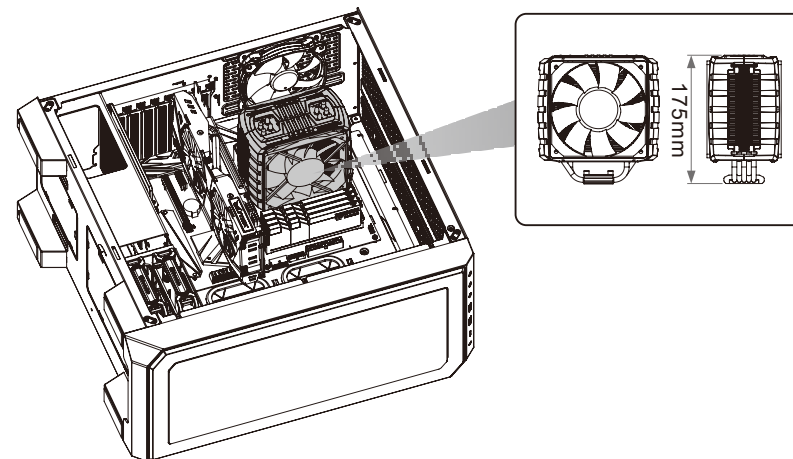

VGA max length: 400mm

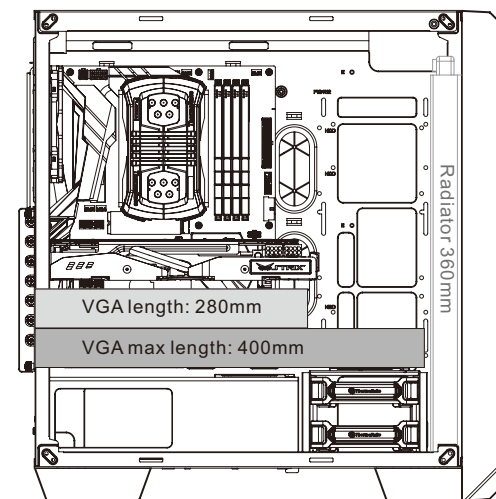


PSU max length: 200mm

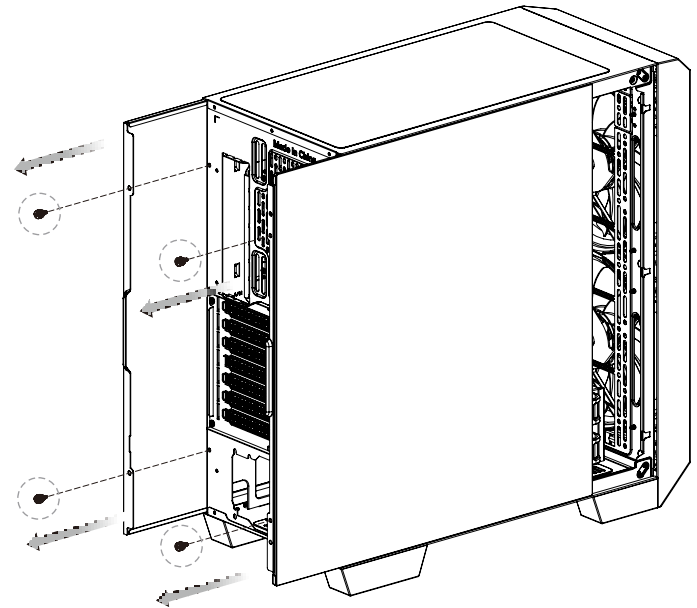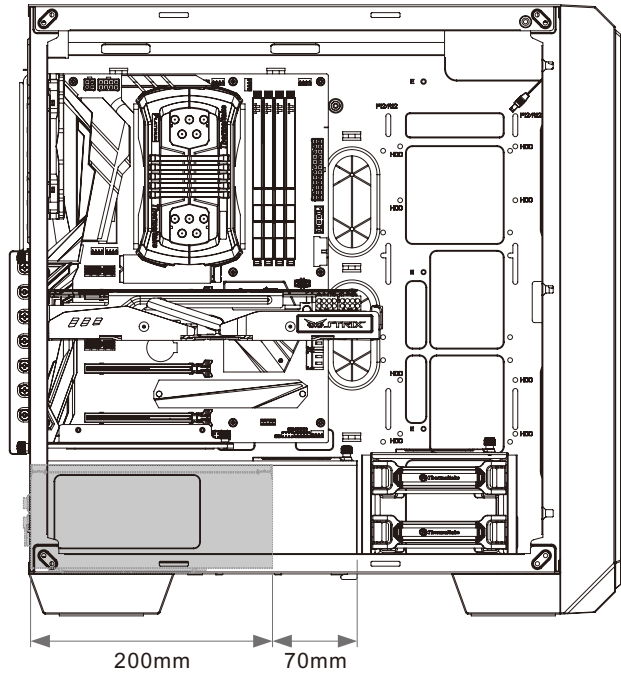













x 4

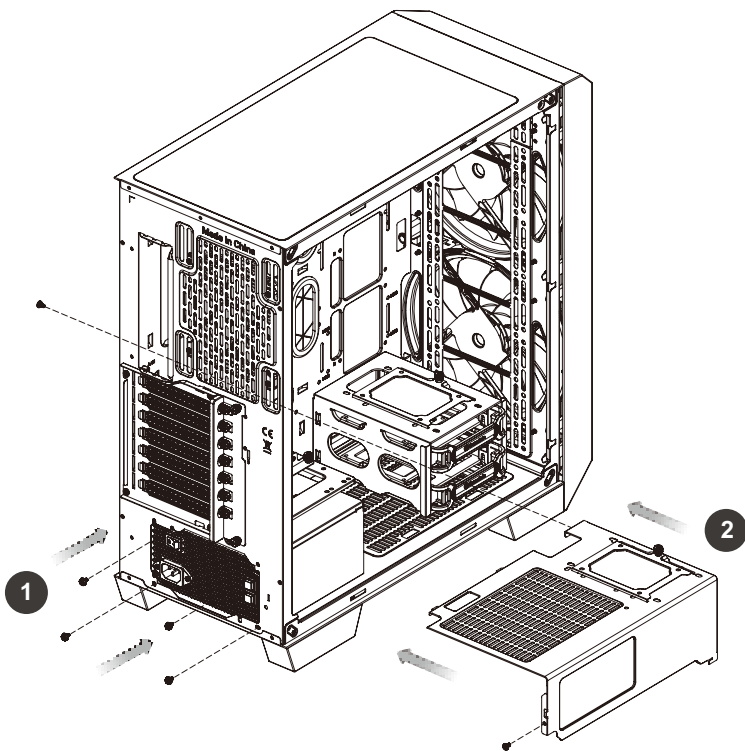


x 9

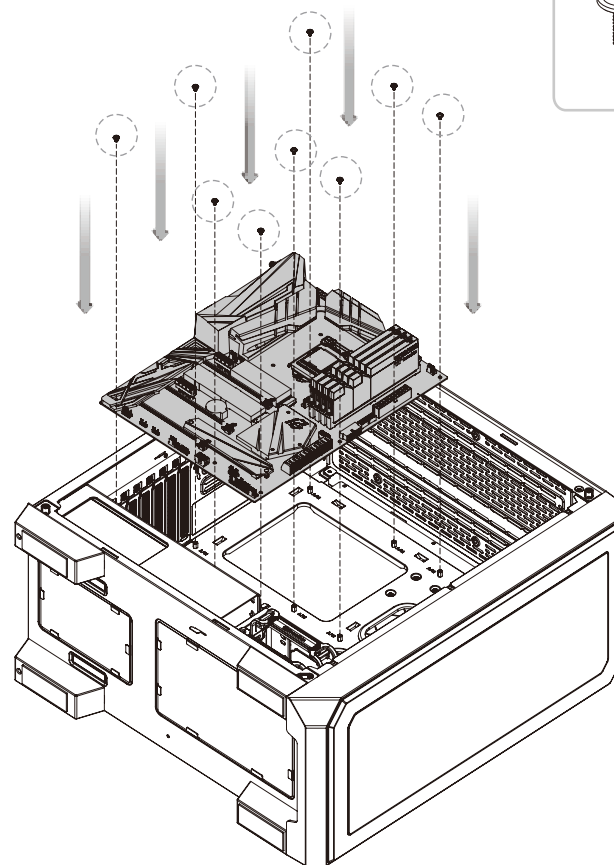


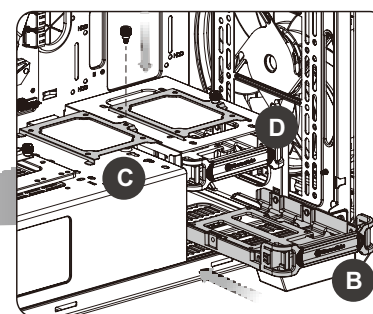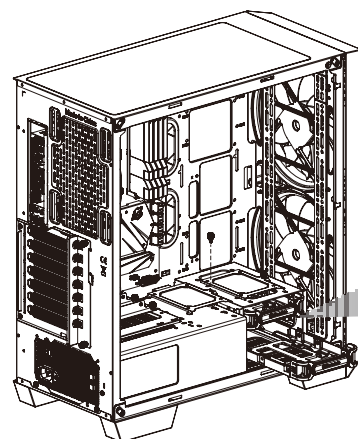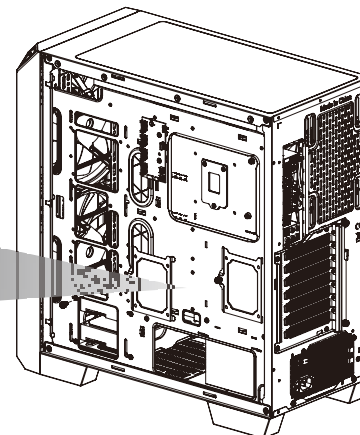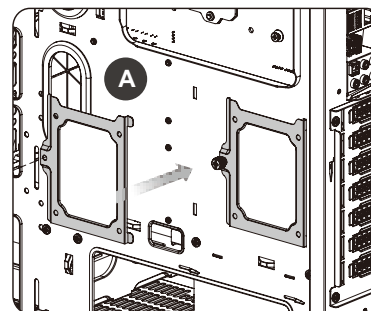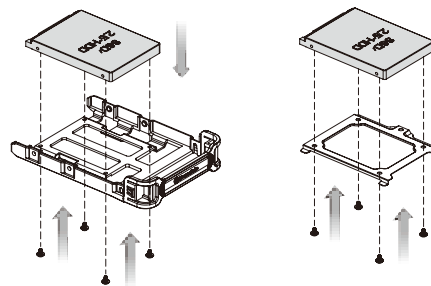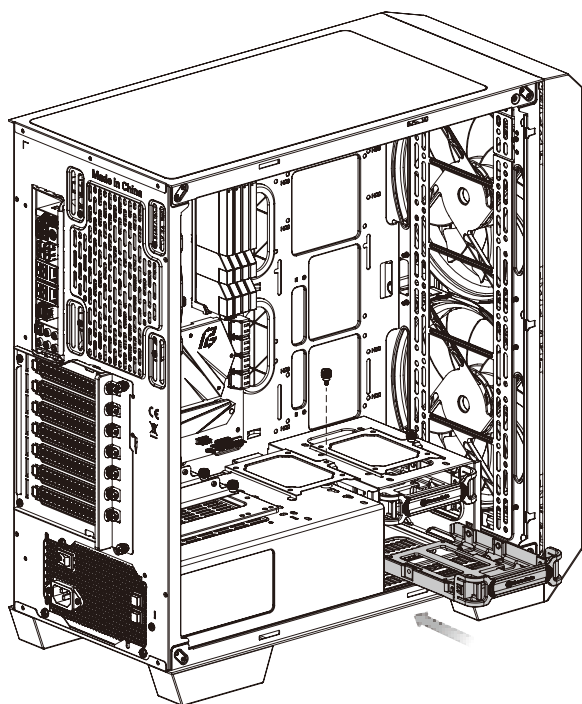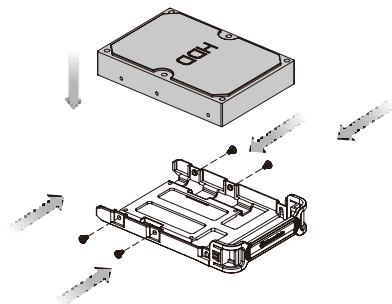

## Type A

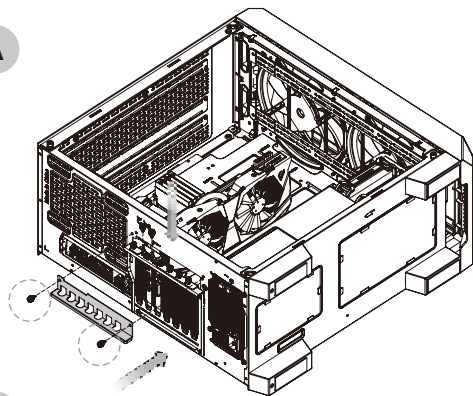

## Type B

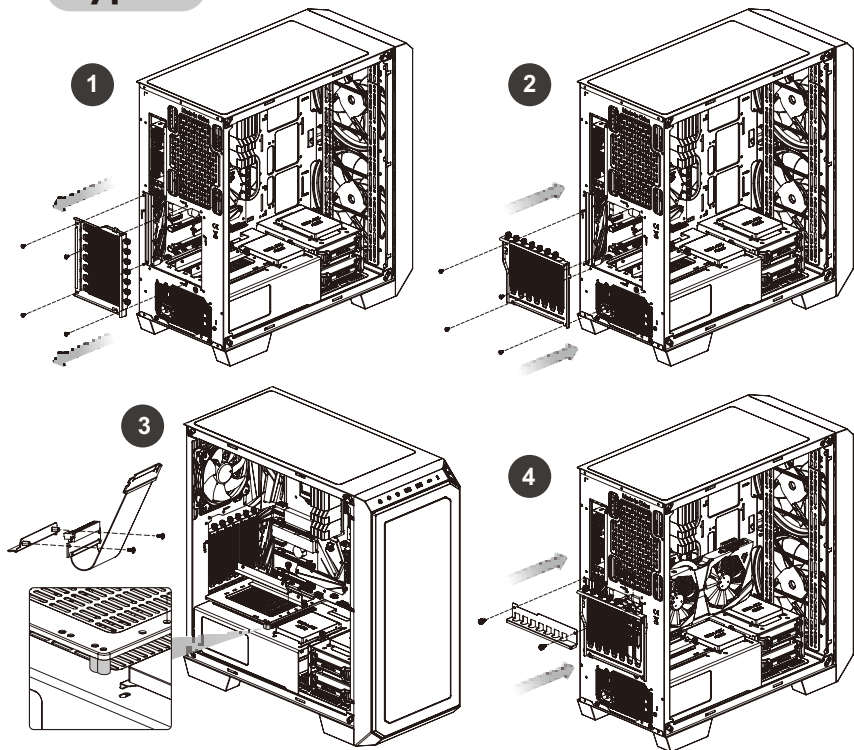

## Top

200mm x 1  
or  
140mm x 2  
or  
120mm x 3

## Rear


120mm x 1

## Front



120mm x 3  
or  
140mm x 3  
or  
200mm x 2

## M/B Side


120mm x 3

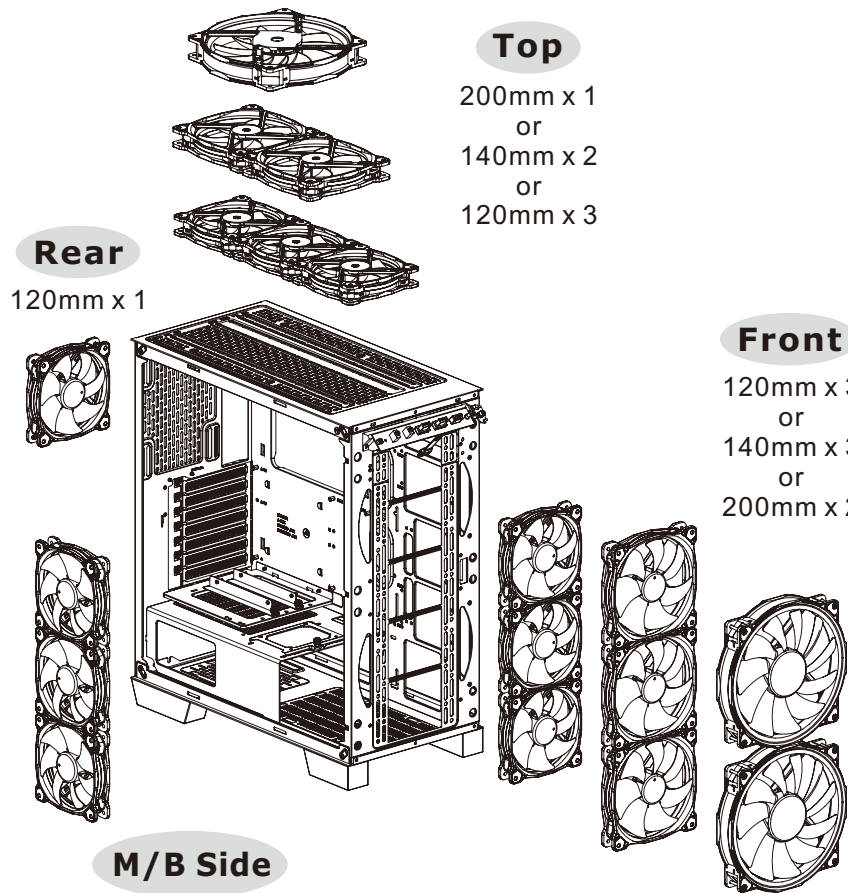



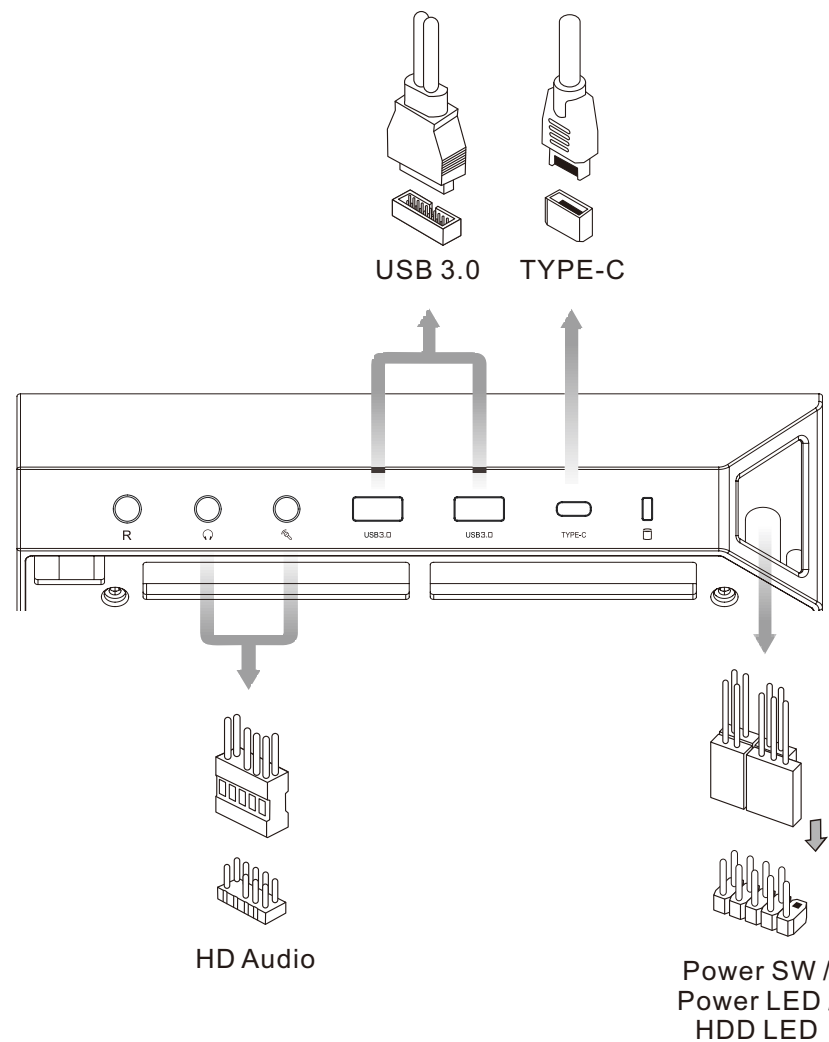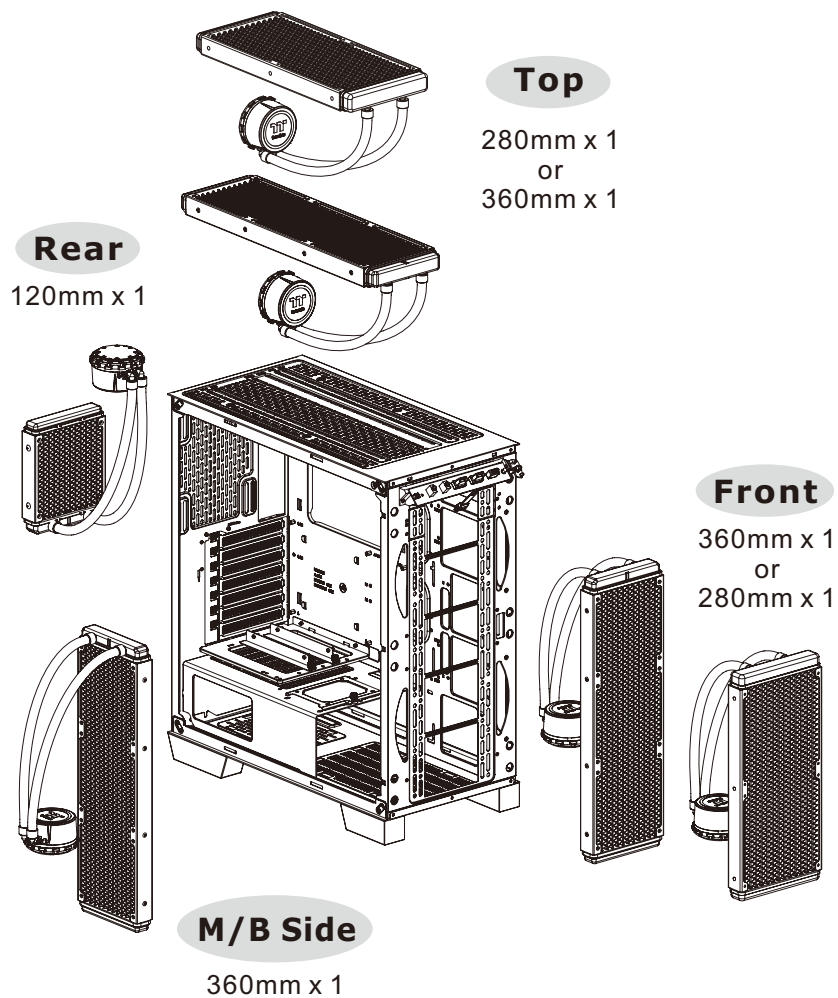





Top

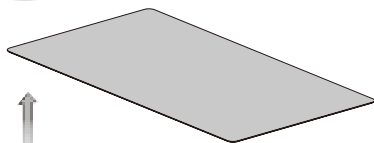



Right




Bottom

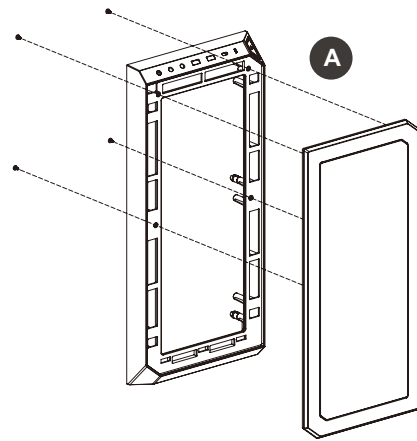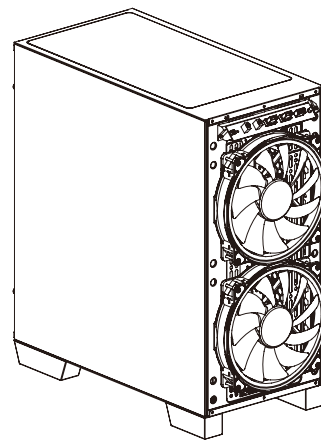

A

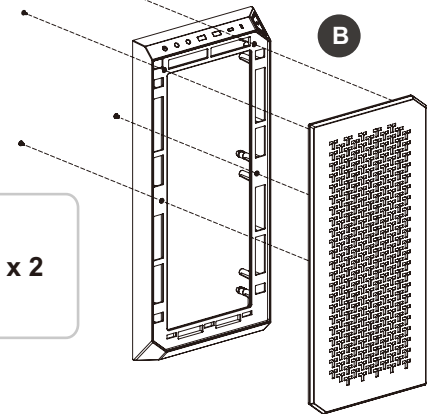

B



## I/O Port




- Wave Mode** Mode 1
- Flow Mode** Mode 2
- RGB Lighting** Mode 3 (Single Color)
- Radar Mode** Mode 4~10  
(Red, Yellow, Green, Cyan, Blue, White, Purple)
- Breath Mode** Mode 11~18  
(RGB, Red, Yellow, Green, Cyan, Blue, White, Purple)
- Full Lighted Mode** Mode 19
- Single Color** Mode 20~26  
(Red, Yellow, Green, Cyan, Blue, White, Purple)
- Light Off** Mode 27

※ Long press on RGB button for 3 seconds, fan will blink twice which now are controlled by MB software. And vice versa.

## How to connect MB


## ASUS/ASRock/BIOSTAR

Aura Addressable Strip Header(s)

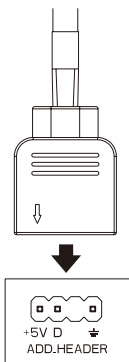

## MSI

JRGB-strip Header(S)

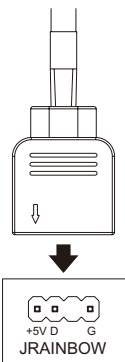

## GIGABYTE

AOURS RGB Fusion with Digital LEDs

