

Epson LX-350

Brand : Epson
Product name : LX-350
Product code: C11CC24031

- High reliability: MTBF of 10,000 operating hours
- Power-efficient: 1.1W on standby, 27W powered on
- Economical: Ribbon yield of 4m characters
- Easy integration: Parallel, Serial and USB interfaces
- Compact design: Fits neatly onto desks

Epson LX-350:


A very economical printer to run, the LX-350 helps save money with its high ribbon yield of 4 million characters and its low power consumption. Using just 1.1W in sleep mode and 27W when powered on, the LX-350 is qualified by ENERGY STAR for its excellent energy efficiency.

Easy to integrate, the LX-350 has Parallel, Serial and USB interfaces as standard, and will fit neatly onto desks thanks to its compact design and cable management system.



Printing		Operational conditions	
Maximum resolution *	240 x 144 DPI	Operating relative humidity (H-H)	10 - 80%
Maximum printing width (columns) *	80	Storage relative humidity (H-H)	10 - 80%
Colour *	✗	System requirements	
Maximum print speed *	357 cps	Windows operating systems supported	Windows 2000, Windows 7, Windows 8, Windows Vista, Windows XP
Maximum print speed (draft)	312 cps	Bundled software	Epson Status Monitor
Maximum print speed (LQ)	78 cps	Weight & dimensions	
Character pitch	10,12 cpi	Width	348 mm
Maximum number of copies	5 copies	Depth	275 mm
Built-in barcodes	Code 128 (A/B/C), Code 39, EAN13, EAN8, Interleaved 2/5, POSTNET, UPC-A, UPC-E	Height	154 mm
		Weight	4.1 kg
Paper handling		Packaging data	
Maximum print size	A4 (210 x 297 mm)	Quantity per pack	1 pc(s)
Paper feed	Manual	Package width	220 mm
Paper tray media types	Envelopes, Labels, Plain paper, Roll	Package depth	425 mm
		Package height	360 mm
		Package weight	5.2 g
Features		Other features	
Buffer size *	128 KB	Connectivity technology	Wired
Sound pressure level (printing) *	53 dB	Print technology	Dot matrix
Page description languages *	Epson ESC/P2	Needles	9
Country of origin	Indonesia	Technical details	
Ports & interfaces		Sustainability certificates	ENERGY STAR
Standard interfaces *	Parallel, USB 2.0	Logistics data	
Endurance		Products per pallet	45 pc(s)
Print head *	9-pin	Pallet gross length	120 cm
Print direction	Bidirectional	Pallet gross width	80 cm
Print head life	400 million characters	Pallet gross height	2.08 m
Ribbon life (black, draft)	4 million characters	Products per pallet layer	5 pc(s)
Mean time between failures (MTBF)	10000 h	Products per pallet layer (UK)	6 pc(s)
Power			
Power consumption (typical)	27 W		
Power consumption (standby)	1.1 W		

Operational conditions		Logistics data	
Operating temperature (T-T)	5 - 35 °C	Products per pallet (UK)	54 pc(s)
Storage temperature (T-T)	5 - 35 °C	Pallet length (UK)	120 cm
		Pallet width (UK)	100 cm
		Pallet height (UK)	2.08 m
		Harmonized System (HS) code	84433210

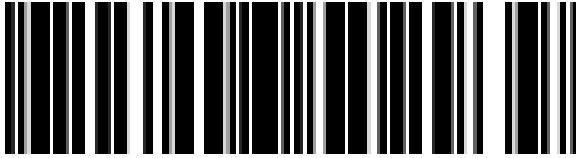

8715946502939

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 23-NOV-2024. Prints or copies of Information are only valid on the printed Publication date