


© 2023 Thermaltake Technology Co., Ltd. All Rights Reserved. 2023.12
All other registered trademarks belong to their respective companies. www.thermaltake.com





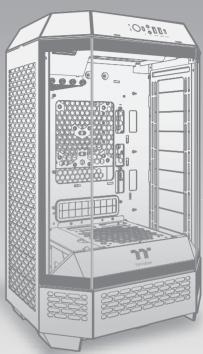

• Picture is for reference only

The Tower 300

User's Manual
Benutzerhandbuch
Mode d'emploi
Manual del usuario
Manuale dell'utente
Manual do Utilizador

安裝說明書 用戶手冊ユーザーズマニュアル Руководство пользователя kullanıcı elkitabı (EEE Yönetmeliğine Uygundur) คู่มือการใช้

TT Premium



TT Premium

To continue achieving the corporate mission of delivering the perfect user experience, Thermaltake developed "TT Premium" with the essence of combining supreme quality products with a new logo design. TT Premium is far more than just a guarantee of quality. Behind the name, it represents the passion in DIY, Modding and Thermaltake's desire to be the most innovative brand in the PC hardware market. To satisfy the demand of the high-end PC users, TT Premium follows its core values of Excellent Quality, Unique Design, Diverse Combinations and Boundless Creativity to provide a high performance PC product for every enthusiast. http://ttpremium.com

Tt LCS-Liquid Cooling Support Certification



Tt LCS Certified is a Thermaltake exclusive certification applied to only products that pass the design and hardcore enthusiasts standards that a true LCS chassis should be held to. The Tt LCS certification was created so that we at Thermaltake can designate to all power users which chassis have been tested to be best compatible with extreme liquid cooling configurations to ensure you get the best performance from the best features and fitment.

Join Tt Community To Receive Benefits



Dear Valued Customer,

Thank you for choosing Thermaltake.

As a new user we value your thoughts and opinions and your feedback is important to us. We at Thermaltake would like to use this opportunity to invite you to join our Community Forums. Register today to start enjoying the full benefits of our community.



Benefits of being a member:

- Quick and responsive user support
- Receive help and advice with new builds
- Keep up to date with new product releases
- · Share your thoughts and builds with the community
- Enter monthly contests and giveaways

Brand official website http://www.thermaltake.com/

Global Facebook https://www.facebook.com/ThermaltakeInc Taiwan Facebook

http://www.facebook.com/ThermaltakeTW

Global community forums http://community.thermaltake.com

CONTENTS

Chapter 1. Product Introduction

1.0	Specification ·····	01
1.1	Accessory ·····	02
1.2	Warning and Notice ·····	03

Chapter 2. Installation Guide


2.0	Remove Components ·····	06
2.1	Power Supply Unit (PSU) Installation	07
2.2	Motherboard Installation	08
2.3	HDD Installation	09
2.4	VGA Card Installation	11
2.5	Air Cooling Installation	12
2.6	AIO Liquid Cooling Installation	13
2.7	I/O Connection	14
2.8	Remove Filters	15

Case Type Micro Tower						
Dimension (H*W*D)	551 x 342 x 281 mm (22.5 x 14 x 11.5 inch)					
Side Panel	Tempered Glass x 3					
Material	SPCC					
Cooling System	Top (exhaust): 140 x 140 x 25 mm CT140 fan (1500 rpm, 30.5 dBA) x 2					
Drive Bays	3 x 3.5" or 3 x 2.5"					
Expansion Slots	4					
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX)					
I/O Port	USB 3.2 (Gen 2) Type-C x 1, USB 3.0 x 2, HD Audio x 1					
PSU	Standard PS2 PSU (Standard PS2 PSU (optional)				
	Тор	2 x 120 mm, 1 x 120 mm	2 x 140 mm, 1 x 140 mm			
Fan Support	Right Side	3 x 120 mm, 2 x 120 mm, 1 x 120 mm	3 x 140 mm, 2 x 140 mm, 1 x 140 mm			
т ап оцрроп	Rear	2 x 120 mm, 1 x 120 mm 2 x 140 mm, 1 x 140 mm				
	Power Cover	1 x 120 mm	1 x 140 mm			
Radiator Support	Right Side (AIO)	1 x 360 mm, 1 x 240 mm, 1 x 120 mm	1 x 420 mm, 1 x 280 mm,1 x 140 mm			
	CPU cooler height limitation	210 mm				
Clearances	VGA length limitation	280 mm (With power cover) 400 mm (Without power cover)				
	PSU length limitation	220 mm				


Figure		Part Name	Q'ty	Used For
•		Screw #6-32 x 6 mm	4	Power Supply
(Screw #6-32 x 6 mm	24	Motherboard / 3.5" SSD
0		Screw M3 x 5 mm	12	2.5" SSD / HDD
(4)	1000	Stand #6-32 x 29 mm	4	Case Fan on the Power Cover
4	JIII	Screw Ø 5 x 10 mm	8	Case Fan
•		Screw #6-32 x 6 mm	2	Case Fan on Fan Bracket
		Zip Ties	10	Cable Management
SPEAKER		Buzzer	1	Motherboard Alarm
TUF		Side Plate Clip	6	Side Panel
ama (Constant)		Bottom Front Panel	1	LCD Display

The Tower 300


Chassis dimension

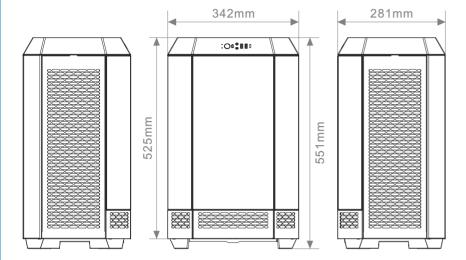


Motherboard Compatibility: ITX / mATX

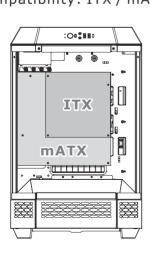


CPU cooler max height: 210mm

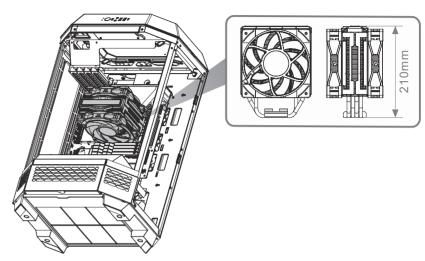



PSU max length: 220mm

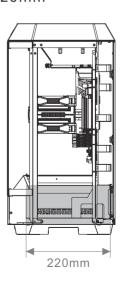


VGA length max length: 280 mm (With Power Cover) 400 mm (Without Power Cover)










Radiator max length: 456 mm

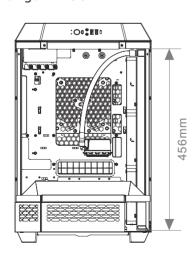

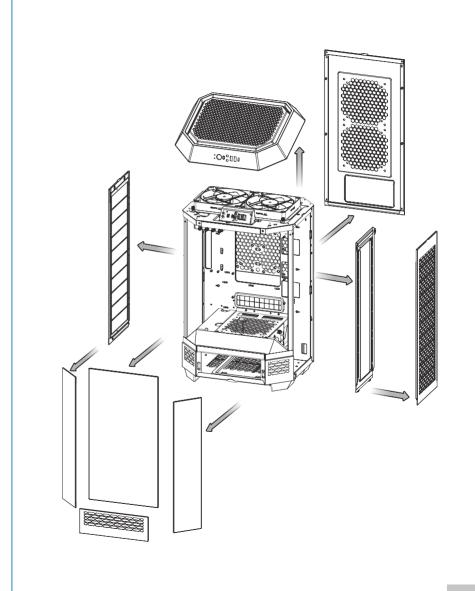




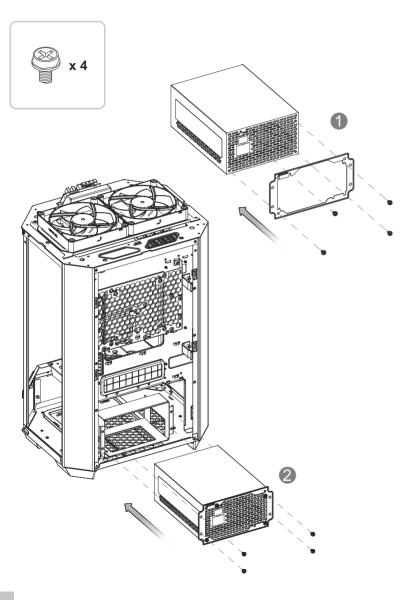


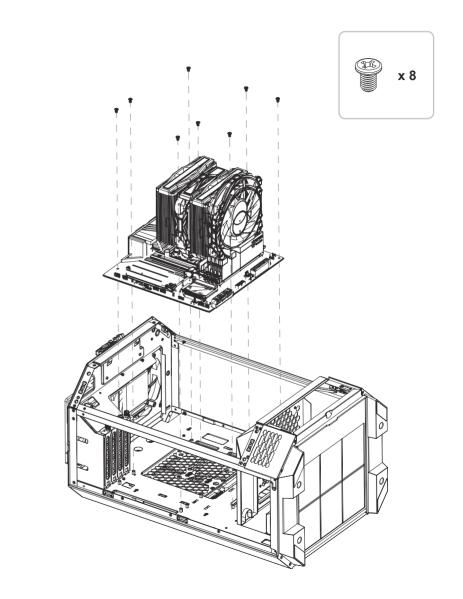






x 4

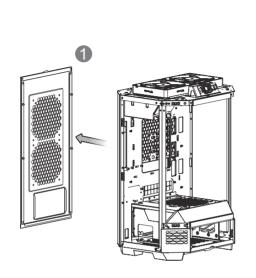


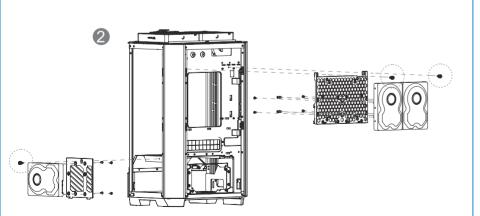

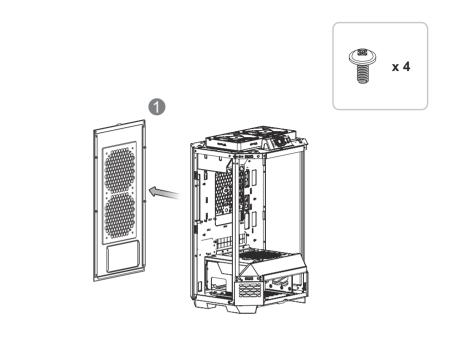


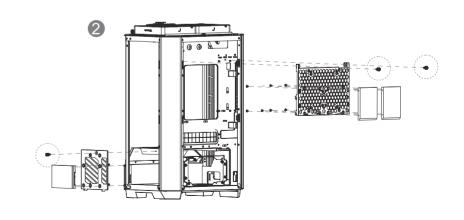


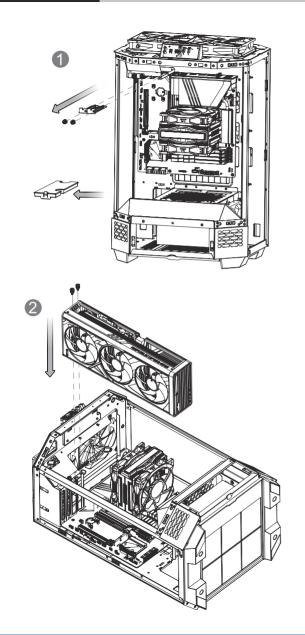

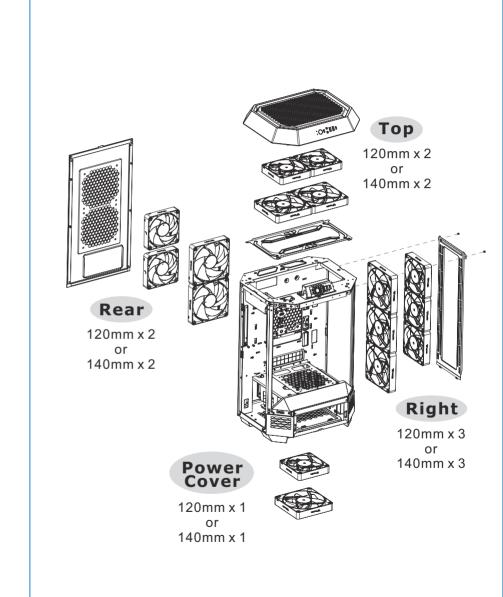

The Tower 300

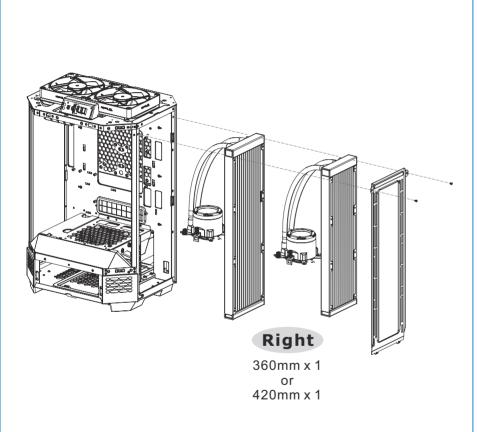

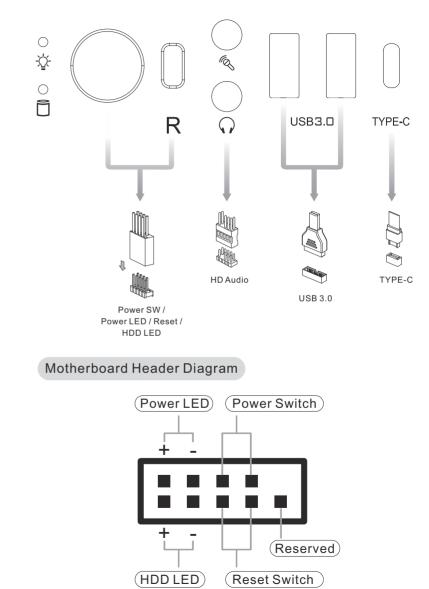

13

