

CyberPower PR3000ERTXL2UAB uninterruptible power supply (UPS) Line-Interactive 3 kVA 3000 W 10 AC outlet(s)

Brand : CyberPower

Product code: PR3000ERTXL2UAB

Product name : PR3000ERTXL2UAB




CyberPower PR3000ERTXL2UAB. UPS topology: Line-Interactive, Output power capacity: 3 kVA, Output power: 3000 W. AC outlet types: C13 coupler, C19 coupler, Power plug: C20 coupler, AC outlets quantity: 10 AC outlet(s). Battery technology: Sealed Lead Acid (VRLA), Typical backup time at full load: 3.8 min, Typical backup time at half load: 11.2 min. Form factor: Rackmount/Tower, Product colour: Black, Housing material: Metal. Width: 433 mm, Depth: 630 mm, Height: 86.5 mm



Features		Battery	
UPS topology *	Line-Interactive	Number of batteries supported	1
Output power capacity *	3 kVA	Typical backup time at full load	3.8 min
Output power *	3000 W	Typical backup time at half load	11.2 min
Waveform *	Pure sine	Battery recharge time	3 h
Input operation voltage (min) *	159 V	Hot-swap battery	✓
Input operation voltage (max) *	288 V		
Input frequency *	50/60 Hz		
Output operation voltage (min)	220 V		
Output operation voltage (max)	240 V		
Output frequency	50/60 Hz		
Automatic Voltage Regulation (AVR)	✓		
Maximum current	16 A		
Surge energy rating	2430 J		
Response time	6 ms		
Heat dissipation	120.8 BTU/h		
Number of input phases	1		
Number of output phases	1		
Output power factor	1		
Power Factor Correction (PFC) type	Active		
Emergency Power Off (EPO)	✓		
EMI/RFI noise filtering	✓		
Surge protection	✓		
Power protection features	Overload		
Audible alarm modes	Alarm when on battery, Fault, Low battery alarm, Overload alarm		
Power source type	AC		
Detachable power cord	✓		
Country of origin	China		
Ports & interfaces		Design	
AC outlet types	C13 coupler, C19 coupler	Form factor *	Rackmount/Tower
Power plug	C20 coupler	Housing material	Metal
AC outlets quantity	10 AC outlet(s)	Rack capacity	2U
USB port	✓	Extended battery module rack capacity	2U
		Cable length	2.4 m
		Cooling type	Active
		Built-in fan	✓
		Product colour *	Black
		Control type	Buttons
		Display type	LCD
		LED indicators	✓
		Operational conditions	
		Operating temperature (T-T)	0 - 40 °C
		Storage temperature (T-T)	-15 - 45 °C
		Operating relative humidity (H-H)	0 - 95%
		Storage relative humidity (H-H)	0 - 95%
		Operating altitude	0 - 3000 m
		Non-operating altitude	0 - 15000 m
		Technical details	
		Sustainability compliance	✓
		Compliance certificates	CE, Federal Communications Commission (FCC), RCM, RoHS, UL, VCCI
		Packaging content	
		Batteries included	✓

Ports & interfaces		Weight & dimensions	
USB 2.0 ports quantity	1	Width	433 mm
USB port type	USB Type-B	Depth	630 mm
Serial interface	✓	Height	86.5 mm
Serial interface type	RS-232	Weight	38.9 kg
Serial ports quantity	2	Package width	575 mm
RS-232 ports	2	Package depth	765 mm
Ethernet LAN (RJ-45) ports	3	Package height	275 mm
Emergency Power Off (EPO) connector	✓	Package weight	48.1 kg
		Package type	Box
Battery		Packaging data	
Battery technology	Sealed Lead Acid (VRLA)	Rack mount kit	✓
		Cables included	Serial
		Manual	✓
		Other features	
		Battery type	RBP0130

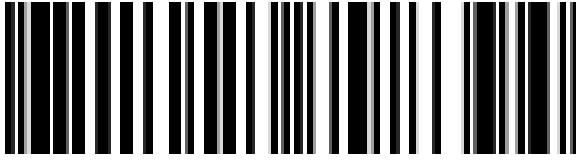

4711027798394

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 20-OCT-2024. Prints or copies of Information are only valid on the printed Publication date