

# MTP250-53V47-OD & MTP250-26V94-OD

**Outdoor AC/DC power supply units for the MikroTik netPower product line. Built for situations when your outdoor switches need that extra juice.**

MTP250-53V47-OD can output 53V 250W, while the MTP250-26V94-OD works with a 26V 250W output. Both power supplies come in a sturdy IP67 enclosure with extra protection from dust and moisture.

MTP250-26V94-OD



MTP250-53V47-OD




Pole/wall mount  
compatible!



Let's take the netPower 16p as an example.

Leaving some ports free so that the clients have a power reserve for their equipment. Some might connect network cameras to their access points, others – additional switches. These in-line power supplies will power all the connected equipment with a total power consumption up to 240W.

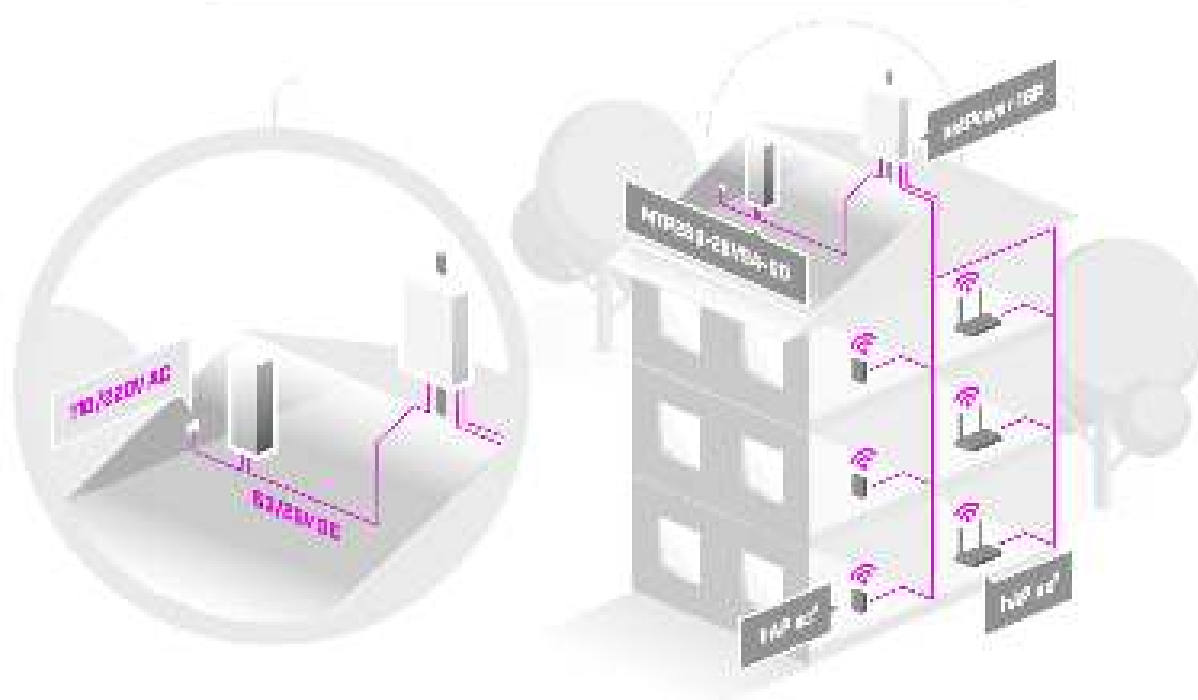

The voltage will depend on your setup – take a look at the “DC jack input Voltage” in the Power input specifications of the desired devices. In our example the home access points are designed for 12-30 V power supplies, so we are using the MTP250-26V94-OD. If you have a setup demanding higher voltage – like a net of PTZ security cameras, you could use the MTP250-53V47-OD instead. Always check the necessary voltage before powering your devices!

## Specifications

|                           |                                   |
|---------------------------|-----------------------------------|
| Product code              | MTP250-53V47-OD / MTP250-26V94-OD |
| AC powering (Max current) | 3.5 A                             |
| AC input & Full load      | 100-240 V                         |
| DC output                 | 250 W                             |
| Operating temperature     | -40°C to +70°C                    |
| Certification             | CE, FCC, IC, IP67                 |

## Included parts



Fastening set



Hose clamp