

Epson EB-750F Ultra short throw projector 3600 ANSI lumens 3LCD 1080p (1920x1080) White

Brand : Epson

Product code: V11HA08540

Product name : EB-750F



- Versatile signage projector: Compact, unobtrusive, ultra-short-throw design for tight spaces
- Up to 120-inch display: Full HD resolution, 3,600 lumen brightness and 3LCD technology
- Fit and forget reliability: Low maintenance laser projector with a 5 year warranty
- Easy installation: 360 degree rotation with portrait projection support
- Flexible playback: Play content directly from a USB stick

3LCD , 3600 lm, Full HD 1080p, 1920 x 1080, 16:9, 2500000 : 1, Laser


Epson EB-750F. Projector brightness: 3600 ANSI lumens, Projection technology: 3LCD, Projector native resolution: 1080p (1920x1080). Light source type: Laser, Service life of light source: 20000 h, Service life of light source (economic mode): 30000 h. Focus: Manual, Fixed focal length: 3.7 mm, Zoom type: Auto. Video processing: 10 bit, Video colour modes: Cinema, Dynamic, Presentation, sRGB, DICOM simulation mode, Multi-projection. Serial interface type: RS-232C, HDMI connector type: Full-size

Projector		Features	
Screen size compatibility *	1651 - 3048 mm (65 - 120")	Noise level (economic mode)	26 dB
Projection distance (wide)	0 - 0.4 m	Noise level *	36 dB
Projection distance (tele)	0 - 0.7 m	Country of origin	Philippines
Projector brightness *	3600 ANSI lumens	Password protection	✓
Projection technology *	3LCD	Multimedia	
Projector native resolution *	1080p (1920x1080)	Built-in speaker(s) *	✓
Contrast ratio (typical) *	2500000:1	RMS rated power	16 W
Native aspect ratio *	16:9	Design	
Number of colours	1.07 billion colours	Product type *	Ultra short throw projector
Projector brightness (economic mode)	2500 ANSI lumens	Product colour *	White
Vertical scan range	192 - 240 Hz	Placement	Ceiling, Desktop, Wall
Keystone correction, horizontal	-3 - 3°	Cable lock slot	✓
Keystone correction, vertical	-3 - 3°	Cable lock slot type	Kensington
Matrix size	1.55 cm (0.61")	Power	
White light output	3600 ANSI lumens	Power source *	AC
Colour light output	3600 ANSI lumens	Power consumption (typical) *	255 W
Heat dissipation	867 BTU/h	Power consumption (standby) *	0.5 W
Light source		Power consumption (economy mode)	197 W
Light source type *	Laser	AC input voltage	220-240 V
Service life of light source *	20000 h	AC input frequency	50 - 60 Hz
Service life of light source (economic mode)	30000 h	Software	
Lens system		Software support	via: Crestron Integrated Partner, Crestron RoomView, Extron IP Link, AMX Device Discovery, Control4 Simple Device Discovery Protocol
Focus *	Manual	Operational conditions	
Fixed focal length	3.7 mm	Storage temperature (T-T)	-10 - 60 °C
Zoom type	Auto	Operating relative humidity (H-H)	20 - 80%
Zoom ratio	1.35:1	Storage relative humidity (H-H)	10 - 90%
Throw ratio	0.26 - 0.36:1	Weight & dimensions	
Video		Width	356 mm
Full HD *	✓	Depth	395 mm
3D *	✗	Height	133 mm
Video processing	10 bit		
Video colour modes	Cinema, Dynamic, Presentation, sRGB, DICOM simulation mode, Multi-projection		

Ports & interfaces		Weight & dimensions	
HDMI connector type	Full-size	Weight *	5.7 kg
USB 2.0 ports quantity	2	Package width	442 mm
USB 2.0 Type-B ports quantity	1	Package depth	473 mm
Audio (L/R) in *	3	Package height	312 mm
Audio (L/R) out	1	Package weight	8.25 kg
Serial interface type *	RS-232C	Packaging content	
VGA (D-Sub) ports quantity *	2	Remote control included *	✓
HDMI ports quantity *	3	Batteries included	✓
Composite video in *	1	Cables included	AC
DVI port *	✗	WLAN adapter included	✓
Network		Bundled software	Inhalt DIY-App, EasyMP Multi PC Projection, Epson Projektor Content Manager, Epson Projektor Management
Ethernet LAN *	✓	Logistics data	
Ethernet LAN (RJ-45) ports	1	Quantity per pack	1 pc(s)
Wi-Fi *	✓	Products per pallet	12 pc(s)
Wi-Fi standards	802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac)	Pallet gross weight	0 g
Miracast	✓	Products per pallet (UK)	24 pc(s)
		Pallet weight (UK)	0 g
		Harmonized System (HS) code	85286200
		Other features	
		Supported network protocols	HTTPS, IPv6, SNMP, ESC/VP.net, PJLink



8715946681962

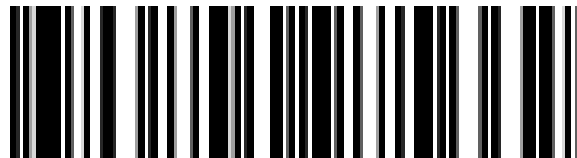

3326744975662

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 10-MAR-2025. Prints or copies of Information are only valid on the printed Publication date