TP-Link Archer T2U WLAN 600 Mbit/s
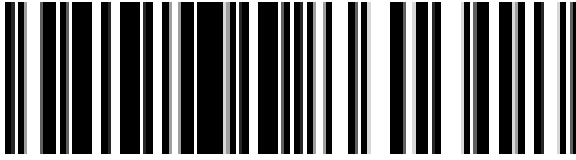
Marque : TP-Link

Nom du produit : Archer T2U

Code produit: ARCHER T2U

TP-Link Archer T2U. Technologie de connectivité: Sans fil, Interface de l'hôte: USB, Interface: WLAN. Maximum data transfer rate: 600 Mbit/s, Top Wi-Fi standard: Wi-Fi 5 (802.11ac), Wi-Fi band: Bi-bande (2,4 GHz / 5 GHz). Couleur du produit: Noir
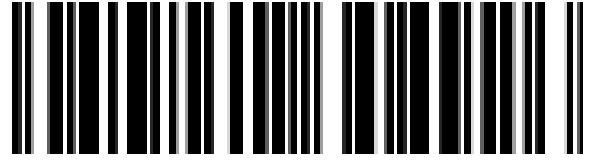
Ports & interfaces

Connectivity technology *	Wireless
Host interface *	USB
Interface *	WLAN
USB version	2.0

Network

Maximum data transfer rate *	600 Mbit/s
Networking standards *	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, IEEE 802.3ac
Wi-Fi	✔
Wi-Fi band	Dual-band (2.4 GHz / 5 GHz)
Frequency range	2.4 - 5 GHz
Top Wi-Fi standard	Wi-Fi 5 (802.11ac)
Wi-Fi standards	802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac)
WLAN data transfer rates supported	11,54,150,433,600 Mbit/s
Modulation	16-QAM, 64-QAM, 256-QAM, CCK, DBPSK, DQPSK, OFDM
Security algorithms	64-bit WEP, 128-bit WEP, 802.1x RADIUS, WPA, WPA2, WPA2-AES, WPA2-PSK, WPA2-TKIP, WPS

Design

Component for *	PC/Laptop
Product colour	Black
Internal *	✘
Antenna	✔
Antenna design	Internal
Antenna direction type	Omni-directional
Transmitting power (CE)	20 dBm

System requirements

Windows operating systems supported	Windows 10, Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 IOT Core, Windows 10 IoT Enterprise, Windows 10 Pro, Windows 10 Pro x64, Windows 10 x64, Windows 7, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 7 x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8 x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64, Windows XP, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64
Mac operating systems supported	Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.13 High Sierra, Mac OS X 10.7 Lion, Mac OS X 10.7.5 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks
Linux operating systems supported	✔

Design

Transmitting power (FCC)	20 dBm
LED indicators	Status
Operating modes	Infrastructure mode

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-40 - 70 °C
Operating relative humidity (H-H)	10 - 90%
Storage relative humidity (H-H)	5 - 90%

Sustainability

Sustainability compliance	✔

Weight & dimensions

Width	41 mm
Depth	19.5 mm
Height	8.7 mm

Packaging data

Package width	138 mm
Package depth	128 mm
Package height	30 mm
Package weight	90 g

Packaging content

Resource CD	✔
Quick installation guide	✔

Technical details

Compliance certificates	CE, Federal Communications Commission (FCC), RoHS

Logistics data

Harmonized System (HS) code	85176990

5054230861318

5054242304926

5054484623199

6935364089917