



ASUS ZenWiFi AX (XT9) AX7800 2er Set Weiß Tri-bande (2,4 GHz / 5 GHz / 5 GHz) Wi-Fi 6 (802.11ax) Blanc 4 Interne

Marque : ASUS

Code produit: 90IG0740-MO3B40

Nom du produit : ZenWiFi AX (XT9) AX7800 2er Set Weiß


ASUS ZenWiFi AX (XT9) AX7800 2er Set Weiß. Couleur du produit: Blanc, Type d'antenne: Interne, Type de produit: Système maillé. Wi-Fi band: Tri-bande (2,4 GHz / 5 GHz / 5 GHz), Top Wi-Fi standard: Wi-Fi 6 (802.11ax), Standards wifi: 802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac), Wi-Fi 6 (802.11ax). Fréquence du processeur: 1,7 GHz, Mémoire interne: 512 Mo, Mémoire flash: 256 Mo. Tension d'entrée AC: 110 - 240 V, Fréquence d'entrée AC: 50 - 60 Hz, Tension sortie de l'adaptateur secteur: 12 V. Poids: 740 g



Design		Wireless LAN features		
Product type	Mesh system	VPN support	Instant Guard VPN Client L2TP VPN Client OVPN VPN Client PPTP VPN Client WireGuard VPN Server IPsec VPN Server OVPN VPN Server PPTP VPN Fusion VPN Server WireGuard	
Product colour *	White			
LED indicators	Power			
Antenna type *	Internal			
Antennas quantity	6			
Maximum coverage	264.77 m²	Features		
Reset button	✓		Built-in processor	✓
Wireless LAN features			Processor cores	2
			Processor frequency	1.7 GHz
			Internal memory	512 MB
		Flash memory	256 MB	
		Quality of Service (QoS) support	✓	
Wi-Fi band *	Tri-band (2.4 GHz / 5 GHz / 5 GHz)	Parental control	✓	
Top Wi-Fi standard *	Wi-Fi 6 (802.11ax)	Parental control features	Custom profiles	
Wi-Fi standards	802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac), Wi-Fi 6 (802.11ax)	Firmware upgradeable via	Auto upgrade wizard	
		Operating modes	Wireless router mode, Access point mode	
WLAN data transfer rate (first band)	574 Mbit/s	Ports & interfaces		
WLAN data transfer rate (second band)	2402 Mbit/s		Ethernet LAN (RJ-45) ports *	4
WLAN data transfer rate (third band)	4804 Mbit/s		Ethernet WAN	✓
Networking standards	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11ax, IEEE 802.11g, IEEE 802.11n		Power	
Security algorithms	WPA-Enterprise, WPA-PSK, WPA2-Enterprise, WPA2-PSK, WPA3-PSK, WPS	AC input voltage		110 - 240 V
IGMP snooping	✓	AC input frequency		50 - 60 Hz
Dynamic DNS (DDNS)	✓	AC adapter output voltage		12 V
Guest access	✓	AC adapter output current	3 A	
		Weight & dimensions		
			Weight	740 g

Packaging content

AC adapter included	✓
Ethernet cable	✓

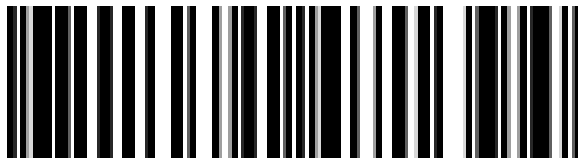

4711081471394

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 10-DEC-2024. Prints or copies of Information are only valid on the printed Publication date