

CyberPower PR1000ELCDRT1U alimentation d'énergie non interruptible Interactivité de ligne 1 kVA 800 W 6 sortie(s) CA

Marque : CyberPower

Code produit: PR1000ELCDRT1U

Nom du produit : PR1000ELCDRT1U

CyberPower PR1000ELCDRT1U. Topologie UPS: Interactivité de ligne, Puissance de sortie, capacité (VA): 1 kVA, Puissance de sortie: 800 W. Types de sortie AC: Coupleur C13, Prise mâle: Coupleur C14, Nombre de prises en sortie: 6 sortie(s) CA. Technologie batterie: Sealed Lead Acid (VRLA), Temps de secours type au chargement complet: 3,1 min, Temps de secours type à demi de charge: 12 min. Élément de format: Rack/Tour, Couleur du produit: Noir, Matériau du boîtier/corps: Métal. Largeur: 433 mm, Profondeur: 490 mm, Hauteur: 44 mm




Features		Battery	
UPS topology *	Line-Interactive	Typical backup time at full load	3.1 min
Output power capacity *	1 kVA	Typical backup time at half load	12 min
Output power *	800 W	Battery recharge time	6 h
Waveform *	Pure sine	Hot-swap battery	✓
Input operation voltage (min) *	150 V	Design	
Input operation voltage (max) *	300 V	Form factor *	Rackmount/Tower
Input frequency *	50/60 Hz	Housing material	Metal
Output operation voltage (min)	230 V	Rack capacity	1U
Output operation voltage (max)	230 V	Product colour *	Black
Output frequency	50/60 Hz	Display type	LCD
Automatic Voltage Regulation (AVR)	✓	LED indicators	Operation
Surge energy rating	810 J	Certification	CE, EAC, RCM, RoHS
Response time	4 ms	Operational conditions	
Power factor	0.8	Operating temperature (T-T)	0 - 40 °C
Emergency Power Off (EPO)	✓	Storage temperature (T-T)	-15 - 45 °C
EMI/RFI noise filtering	✓	Operating relative humidity (H-H)	0 - 95%
Surge protection	✓	Storage relative humidity (H-H)	0 - 95%
Power protection features	Overload	Operating altitude	0 - 3000 m
Audible alarm(s)	✓	Non-operating altitude	0 - 15000 m
Audible alarm modes	Alarm when on battery, Fault, Low battery alarm, Overload alarm	Weight & dimensions	
Country of origin	China	Width	433 mm
Ports & interfaces		Depth	490 mm
AC outlet types	C13 coupler	Height	44 mm
Power plug	C14 coupler	Weight	18 kg
AC outlets quantity	6 AC outlet(s)	Package width	540 mm
USB port	✓	Package depth	610 mm
		Package height	158 mm

Battery		Weight & dimensions	
Battery technology	Sealed Lead Acid (VRLA)	Package weight	22 kg
Number of battery cells	1	Logistics data	
		Harmonized System (HS) code	8504408590



4712364141393

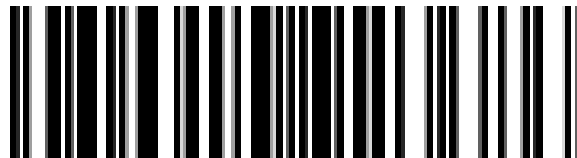

5050914923686

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 10-DEC-2024. Prints or copies of Information are only valid on the printed Publication date