

CyberPower PR1500ELCD alimentation d'énergie non interrompible Interactivité de ligne 1,5 kVA 1350 W 8 sortie(s) CA

Marque : CyberPower

Code produit: PR1500ELCD


Nom du produit : PR1500ELCD

CyberPower PR1500ELCD. Topologie UPS: Interactivité de ligne, Puissance de sortie, capacité (VA): 1,5 kVA, Puissance de sortie: 1350 W. Types de sortie AC: Coupleur C13, Prise mâle: Coupleur C14, Nombre de prises en sortie: 8 sortie(s) CA. Technologie batterie: Sealed Lead Acid (VRLA), Temps de secours type au chargement complet: 5 min, Temps de secours type à demi de charge: 17 min. Élément de format: Tower, Couleur du produit: Noir, Matériau du boîtier/corps: Métal. Largeur: 170 mm, Profondeur: 432 mm, Hauteur: 221 mm




| Features | | Battery | |
|------------------------------------|---|-----------------------------------|--------------------|
| UPS topology * | Line-Interactive | Typical backup time at full load | 5 min |
| Output power capacity * | 1.5 kVA | Typical backup time at half load | 17 min |
| Output power * | 1350 W | Battery recharge time | 8 h |
| Waveform * | Pure sine | Hot-swap battery | ✓ |
| Input operation voltage (min) * | 151 V | Design | |
| Input operation voltage (max) * | 301 V | Form factor * | Tower |
| Input frequency * | 50/60 Hz | Housing material | Metal |
| Output operation voltage (min) | 230 V | Product colour * | Black |
| Output operation voltage (max) | 230 V | Display type | LCD |
| Output frequency | 50/60 Hz | LED indicators | Error, Operation |
| Automatic Voltage Regulation (AVR) | ✓ | Certification | CE, EAC, RCM, RoHS |
| Maximum current | 10 A | Operational conditions | |
| Surge energy rating | 405 J | Operating temperature (T-T) | 0 - 40 °C |
| Response time | 4 ms | Storage temperature (T-T) | -15 - 45 °C |
| Power factor | 0.9 | Operating relative humidity (H-H) | 0 - 95% |
| Emergency Power Off (EPO) | ✓ | Storage relative humidity (H-H) | 0 - 95% |
| EMI/RFI noise filtering | ✓ | Operating altitude | 0 - 3000 m |
| Surge protection | ✓ | Non-operating altitude | 0 - 15000 m |
| Power protection features | Overload | Weight & dimensions | |
| Audible alarm(s) | ✓ | Width | 170 mm |
| Audible alarm modes | Alarm when on battery, Fault, Low battery alarm, Overload alarm | Depth | 432 mm |
| Country of origin | China | Height | 221 mm |
| Ports & interfaces | | Weight | 25.1 kg |
| AC outlet types | C13 coupler | Package width | 316 mm |
| Power plug | C14 coupler | Package depth | 579 mm |
| AC outlets quantity | 8 AC outlet(s) | Package height | 360 mm |
| Number of output IEC jumpers | 1 | Package weight | 27 kg |


| Ports & interfaces | | Packaging data | |
|-------------------------------|-------------------------|------------------------------|---|
| USB port | ✓ | Cables included | USB cable |
| USB 2.0 ports quantity | 1 | Logistics data | |
| Serial ports quantity | 1 | Harmonized System (HS) code | 8504408590 |
| Battery | | Other features | |
| Battery technology | Sealed Lead Acid (VRLA) | Compatible operating systems | Windows 7 / Vista / XP / 2000, Server 2003 / 2008, Linux |
| Number of batteries supported | 1 | Overload protection | ✓ |

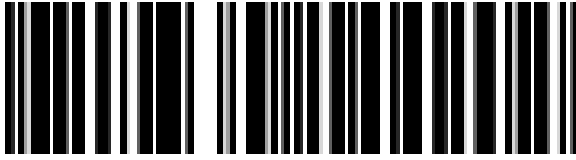


4712364144202

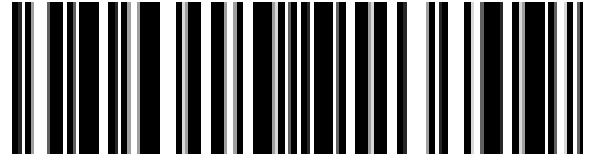

5050914923709

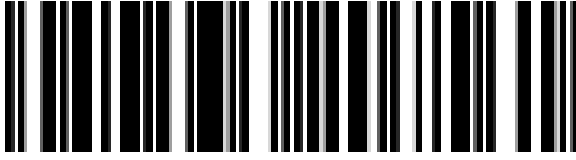

5054533207561

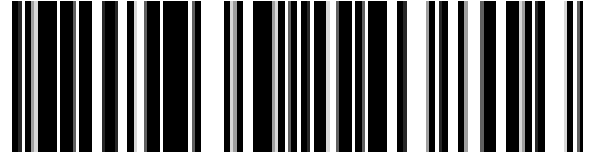

4712364143816

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.