



## APC Easy UPS SMV alimentation d'énergie non interrompible Interactivité de ligne 1,5 kVA 1050 W 6 sortie(s) CA

Marque : APC

Code produit: SMV1500CAI


Nom du produit : Easy UPS SMV

APC Easy UPS SMV. Topologie UPS: Interactivité de ligne, Puissance de sortie, capacité (VA): 1,5 kVA, Puissance de sortie: 1050 W. Types de sortie AC: Coupleur C13, Prise mâle: Coupleur C14, Nombre de prises en sortie: 6 sortie(s) CA. Technologie batterie: Sealed Lead Acid (VRLA), Durée de vie totale de la batterie (max): 5 année(s), Temps de rechargement de la batterie: 4 h. Élément de format: Tower, Couleur du produit: Noir, Gris, Type d'écran: LCD. Largeur: 160 mm, Profondeur: 410 mm, Hauteur: 220 mm



| Features                           |  | Design                            |             |
|------------------------------------|--|-----------------------------------|-------------|
| UPS topology *                     | Line-Interactive   | Form factor *                     | Tower       |
| Output power capacity *            | 1.5 kVA  | Product colour *                  | Black, Grey |
| Output power *                     | 1050 W   | Display type                      | LCD         |
| Waveform *                         | Sine   | LED indicators                    | ✓           |
| Input operation voltage (min) *    | 160 V  | Certification                     | CE          |
| Input operation voltage (max) *    | 295 V  |                                   |             |
| Input frequency *                  | 45/65 Hz   | <b>Operational conditions</b>     |             |
| Output frequency                   | 50/60 Hz   | Operating temperature (T-T)       | 0 - 40 °C   |
| Automatic Voltage Regulation (AVR) | ✓  | Storage temperature (T-T)         | -10 - 40 °C |
| Response time                      | 2 ms   | Operating relative humidity (H-H) | 0 - 95%     |
| Efficiency                         | 98.2%  | Storage relative humidity (H-H)   | 0 - 95%     |
| Crest factor                       | 3:1  | Operating altitude                | 0 - 3000 m  |
| Noise level                        | 45 dB  | Non-operating altitude            | 0 - 3000 m  |
| Audible alarm(s)                   | ✓  | <b>Weight &amp; dimensions</b>    |             |
| Audible alarm modes                | Alarm when on battery, Low battery alarm, Overload alarm | Width                             | 160 mm      |
|                                    |  | Depth                             | 410 mm      |
| <b>Ports &amp; interfaces</b>      |  | Height                            | 220 mm      |
| AC outlet types                    | C13 coupler  | Weight                            | 17.8 kg     |
| Power plug                         | C14 coupler  | Battery width                     | 27.2 cm     |
| AC outlets quantity                | 6 AC outlet(s)   | Battery depth                     | 50.8 cm     |
| USB port                           | ✓  | Battery height                    | 33.9 cm     |
| USB 2.0 ports quantity             | 1  | Battery weight                    | 20.8 kg     |
|                                    |  | <b>Packaging data</b>             |             |

| Battery               |                         | Packaging data              |           |
|-----------------------|-------------------------|-----------------------------|-----------|
| Battery technology    | Sealed Lead Acid (VRLA) | Cables included             | USB cable |
| Battery life (max)    | 5 year(s)               | Manual                      | ✓         |
| Battery recharge time | 4 h                     | <b>Logistics data</b>       |           |
| Cold start            | ✓                       | Harmonized System (HS) code | 85078000  |
|                       |                         | <b>Other features</b>       |           |
|                       |                         | Nominal output voltage      | 230 V     |
|                       |                         | Nominal input voltage       | 230 V     |

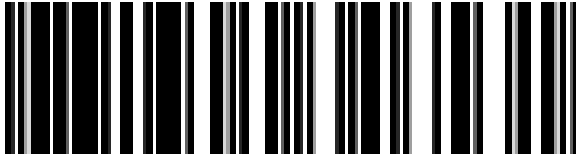

0731304346531



731304346531

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.