

CyberPower PDU44005 unité de distribution d'énergie 10 sortie(s)  
CA 1U Noir

Marque : CyberPower

Code produit: PDU44005

Nom du produit : PDU44005


CyberPower PDU44005. Types de PDU: Géré, Avec contrôle en ligne, Commutable, Capacité du rack: 1U, Type: Monophasé. Nombre de prises en sortie: 10 sortie(s) CA, Types de sortie AC: Coupleur C13, Coupleur C19, Prise mâle: IEC 60320. Longueur de câble: 3,05 m, Certification: CE, FCC Class A, UL62368, EN 55032 Class A, IEC 62368. Surveillance: Courant, Énergie, Tension, Protocoles réseau pris en charge: IPv4/v6, SNMPv1/v3, HTTP/HTTPS, TCP/IP, UDP, DHCP, NTP, DNS, SMTP, SSH, SSL, TLS, Telnet, FTP, and.... Tension nominale à l'entrée: 200 - 240 V, Intensité (max.): 16 A, Fréquence d'entrée AC: 50 - 60 Hz

Design		Weight & dimensions	
PDU types *	Managed, Monitored, Switched	Width	433 mm
Type	Single-phase	Depth	215 mm
Rack capacity *	1U	Height	44 mm
Mounting	Horizontal	Weight	3.4 kg
Housing material	Steel	Packaging data	
Product colour	Black	Package weight	6 kg
Display	LCD	Package width	500 mm
Ports & interfaces		Package depth	398 mm
AC outlets quantity *	10 AC outlet(s)	Package height	125 mm
Power plug	IEC 60320	Packaging content	
AC outlet types *	C13 coupler, C19 coupler	Cables included	Serial
Ethernet LAN (RJ-45) ports	4	Manual	✓
USB ports quantity	1	Rack mount kit	✓
Features		Operational conditions	
Daisy chain	✓	Operating temperature (T-T)	0 - 45 °C
LED indicators	✓	Storage temperature (T-T)	-15 - 55 °C
Cable length	3.05 m	Operating relative humidity (H-H)	0 - 95%
Certification	CE, FCC Class A, UL62368, EN 55032 Class A, IEC 62368	Storage relative humidity (H-H)	0 - 95%
Management features		Operating altitude	0 - 4000 m
Monitoring	Current, Power, Voltage	Non-operating altitude	0 - 15000 m
Supported network protocols	IPv4/v6, SNMPv1/v3, HTTP/HTTPS, TCP/IP, UDP, DHCP, NTP, DNS, SMTP, SSH, SSL, TLS, Telnet, FTP, and Syslog	Technical details	
Firmware upgradeable	✓	Sustainability compliance	✓
Power		Compliance certificates	CE, RoHS
Nominal input voltage *	200 - 240 V	Logistics data	
		Country of origin	China

Power	
AC input frequency	50 - 60 Hz
Maximum current *	16 A



4711027799780

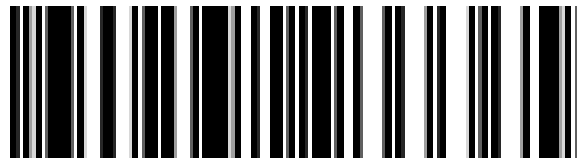

0649532933365



649532933365

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 10-DEC-2024. Prints or copies of Information are only valid on the printed Publication date