

Zyxel ATP200 pare-feux (matériel) Bureau 2 Gbit/s

Marque : Zyxel


Code produit: ATP200-EU0102F

Nom du produit : ATP200

Zyxel ATP200. Firewall throughput: 2 Gbit/s, VPN throughput: 0,5 Gbit/s, IPSec VPN throughput: 40 Gbit/s. Dissipation thermique: 45,38 BTU/h, Temps moyen entre pannes: 529688,2 h. Technologie de connectivité: Avec fil, LAN Ethernet : taux de transfert des données: 10,100,1000 Mbit/s, Port WAN: Ethernet (RJ-45). Élément de format: Bureau. Courant d'entrée: 2.5 A, Consommation électrique (typique): 13,3 W



Data transmission		Design	
Firewall throughput *	2 Gbit/s	Rack mounting	✓
VPN throughput	0.5 Gbit/s	Form factor	Desktop
IPSec VPN throughput	40 Gbit/s	Built-in fan	✓
SSL performance	10 transactions/sec	Power	
UTM throughput (fast/full scan)	450/450 Gbit/s	Input current	2.5 A
Maximum connections (SPI)	2000	Power consumption (typical)	13.3 W
HTTPS encryption	✓	Certificates	
Performance		Certification	FCC Part 15 (Class B), CE EMC (Class B), C-Tick (Class B), BSMI, LVD (EN60950-1), BSMI
Heat dissipation	45.38 BTU/h	Operational conditions	
Mean time between failures (MTBF)	529688.2 h	Operating temperature (T-T)	0 - 40 °C
Network		Storage temperature (T-T)	-30 - 70 °C
Number of VLANs	16	Operating relative humidity (H-H)	10 - 90%
Active TCP connections (max)	600000	Storage relative humidity (H-H)	10 - 90%
Security		Weight & dimensions	
Stateful Packet Inspection (SPI)	✓	Dimensions (WxDxH)	272 x 187 x 36 mm
Content filtering	1	Weight	1.4 kg
Management features		Packaging data	
LED indicators	✓	Package width	427 mm
On/off switch	✓	Package height	73 mm
Ports & interfaces		Package depth	247 mm
Connectivity technology	Wired	Package weight	2.42 kg
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	2	Packaging content	
Ethernet LAN (RJ-45) ports	4	Rack mount kit	✓
Ethernet LAN data rates	10,100,1000 Mbit/s	Other features	
Number of console ports	1	Firewall throughput	2000 Mbit/s
WAN connection	Ethernet (RJ-45)	VPN throughput	500 Mbit/s
Ethernet DMZ ports quantity	1	Logistics data	
SFP module slots quantity	1	Harmonized System (HS) code	85176990

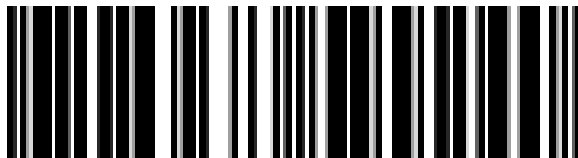

4718937599240

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 16-DEC-2024. Prints or copies of Information are only valid on the printed Publication date