QNAP

QNAP TS-464U NAS Rack (1 U) Intel® Celeron® N5095 8 Go DDR4 0 To QNAP Turbo System Aluminium, Noir

Marque : QNAP

Code produit: TS-464U-8G
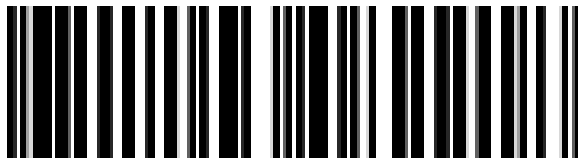
Nom du produit : TS-464U

- Connectivité 2,5GbE: Il est possible d'atteindre des vitesses de transfert jusqu'à 5 Gbit/s en configurant l'agrégation de ports avec les deux ports 2,5GbE intégrés
- Sortie HDMI: Prend en charge une lecture multimédia 4K et le transcodage en temps réel
- Application SSD NVMe: Deux emplacements SSD M.2 NVMe PCIe prennent en charge la technologie Qtier™ de hiérarchisation automatique et le cache SSD
- Interface USB: Deux ports USB 3.2 Gen 2 10 Gbit/s pour un transfert des données plus rapide
- Sauvegarde et restauration des données: Protège les PC/Mac, les machines virtuelles, les conteneurs logiciels, les données cloud et les services SaaS
- Applications de cloud hybride: Les passerelles de stockage en cloud réalisent des applications de cloud hybride en travaillant avec l'espace de cache réservé sur le NAS
Intel Celeron N5095, Intel UHD Graphics, 8 GB SODIMM DDR4, 4GB Flash, 4 x 3.5", RJ-45, USB 2.0, USB 3.2 Gen 2, HDMI, 1U, 6.6 kg

Storage

Storage drive capacity *	0 GB
Supported storage drive interfaces	Serial ATA II, Serial ATA III
Storage drive sizes supported	2.5,3.5"
RAID support *	✔
RAID levels	0, 1, 5, 6, 10, JBOD
Online RAID migration	✔
Online RAID expansion	✔
RAID rebuild	✔
Hot-swap drive bays	✔
Supported file systems	FAT32, HFS+, NTFS, exFAT, ext3, ext4
Storage drives installed *	✘
Total installed storage capacity *	0 TB
Number of storage drives supported *	4
Installed storage drive type *	✘
Supported storage drive types *	HDD & SSD
Disk roaming	✔

Processor

Processor manufacturer *	Intel
Processor family *	Intel® Celeron®
Processor model *	N5095
Processor frequency *	2 GHz
Processor boost frequency	2.9 GHz
Processor cores	4
Processor threads	4
CPU configuration (max)	1
On-board graphics card model	Intel® UHD Graphics

Memory

Internal memory *	8 GB
Internal memory type	DDR4
Maximum RAM supported	16 GB
Memory slots	2
Memory form factor	SO-DIMM
Flash memory	4000 MB

Performance

Backup function *	✔
Backup features	Cloud, iSCSI LUN
Buzzer	✔
Multilingual support	✔
Snapshot	✔
Management protocols	SNMP V2, V3
Security algorithms	256-bit AES, FIPS 140-2, HTTPS, SNMPv2, SNMPv3, SSH
Access Control List (ACL)	✔
Reset button	✔
On/off switch	✔
Built-in FTP server	✔
Browser supported	Apple Safari, Google Chrome, Microsoft Edge, Mozilla Firefox
System log	✔
Hot spare	✔
Disk scan	✔
S.M.A.R.T. support	✔
Share folder	CIFS/SMB

Software

Operating system installed *	QNAP Turbo System
Operating system version	5.0.1
Windows operating systems supported	Windows 10, Windows 11, Windows 7, Windows 8
Linux operating systems supported	Ubuntu 14.04
Mac operating systems supported	Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.13 High Sierra, Mac OS X 10.14 Mojave, Mac OS X 10.15 Catalina, Mac OS X 10.15.3 Catalina, Mac OS X 11.0 Big Sur, Mac OS X 12.0 Monterey, Mac OS X 13.0 Ventura
Server operating systems supported	Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019
Other operating systems supported	Solaris 10

Network

Ethernet LAN *	✔
Ethernet LAN data rates	10,100,1000,2500 Mbit/s
Copper ethernet cabling technology	10BASE-T, 100BASE-TX, 1000BASE-T, 2500BASE-T
DHCP server	✔
Jumbo frames support	✔
iSCSI support	✔
Wake-on-LAN ready	✔
Dynamic DNS (DDNS)	✔

Ports & interfaces

USB port *	✔
USB 2.0 ports quantity	2
USB 3.2 Gen 2 (3.1 Gen 2) Type-A ports quantity	2
HDMI ports quantity	1
HDMI version	1.4b
Ethernet LAN (RJ-45) ports *	2
Concurrent connections	1500
PCI Express x2 (Gen 3.x) slots	1

Design

Chassis type *	Rack (1U)
Cooling type *	Active
Product colour	Aluminium, Black
Number of fans	2 fan(s)
Fan diameter	4 cm
LED indicators	HDD, LAN, Power, Status

Performance

Type *	NAS
Device class *	Small & Medium Business

Power

Power supply location	Built-in
Power supply unit (PSU) capacity	250 W
Number of power supply units	1
Power consumption (typical)	36.81 W
Power consumption (sleep)	22.285 W
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Fan voltage	12 V

Weight & dimensions

Width *	430 mm
Depth *	479 mm
Height *	43.3 mm
Package weight	8.54 kg

Packaging content

Cables included	AC, LAN (RJ-45)
Power cables quantity	1
Quick start guide	✔
Number of screws	84

Processor special features

Enhanced Intel SpeedStep Technology	✔
Idle States	✔
Intel 64	✔
Intel Trusted Execution Technology	✗
Intel Virtualization Technology (VT-x)	✔
Intel Virtualization Technology for Directed I/O (VT-d)	✔
Intel VT-x with Extended Page Tables (EPT)	✔

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	5 - 95%
Storage temperature (T-T)	-20 - 70 °C

Logistics data

Harmonized System (HS) code	84714100

4711103082218