



APC Smart-UPS On-Line alimentation d'énergie non interruptible Double-conversion (en ligne) 20 kVA 16000 W 8 sortie(s) CA

Marque : APC

Code produit: SURT20KRMXLI

Nom du produit : Smart-UPS On-Line

Smart-UPS RT 20kVA RM 230V

[APC Smart-UPS On-Line alimentation d'énergie non interruptible Double-conversion \(en ligne\) 20 kVA 16000 W 8 sortie\(s\) CA:](#)

APC Smart-UPS RT, 16 kW / 20 kVA, Entrée 230V / Sortie 230V, Interface Port DB-9 RS-232, RJ-45 10/100 Base-T, Smart-Slot, Extended runtime model, Hauteur du rack 12 U.


Comprend: Logiciel sur cédérom, Rails de support pour montage en rack, Câble RS-232 pour connexion Smart UPS, Manuel utilisateur, Carte de gestion Web/SNMP.

APC Smart-UPS On-Line. Topologie UPS: Double-conversion (en ligne), Puissance de sortie, capacité (VA): 20 kVA, Puissance de sortie: 16000 W. Types de sortie AC: Coupleur C19, Prise mâle: Terminal, Nombre de prises en sortie: 8 sortie(s) CA. Technologie batterie: Sealed Lead Acid (VRLA), Capacité de la batterie: 3840 VAh, Temps de secours type au chargement complet: 4,9 min. Elément de format: Rack/Tour, Couleur du produit: Noir, Capacité du rack: 12U. Compliance certificats: RoHS, Certification: BSMI, EN/IEC 62040-2, EN/IEC 62040-1-1, VDE, PEP, EOLI



Features		Design	
UPS topology *	Double-conversion (Online)	Form factor *	Rackmount/Tower
Output power capacity *	20 kVA	Rack capacity	12U
Output power *	16000 W	Product colour *	Black
Waveform *	Sine	Display type	LCD
Input frequency *	40 - 70 Hz	LED indicators	✓
Output operation voltage (min)	220 V	Operational conditions	
Output operation voltage (max)	240 V	Operating temperature (T-T)	0 - 40 °C
Output frequency regulation	50/60 Hz	Storage temperature (T-T)	-15 - 45 °C
Maximum current	115 A	Operating relative humidity (H-H)	0 - 95%
Number of output phases	1	Storage relative humidity (H-H)	0 - 95%
Efficiency	93.7%	Operating altitude	0 - 3000 m
Crest factor	3:1	Non-operating altitude	0 - 15000 m
Emergency Power Off (EPO)	✓	Certificates	
Noise level	59 dB	Compliance certificates	RoHS
Surge protection	✓	Certification	BSMI, EN/IEC 62040-2, EN/IEC 62040-1-1, VDE, PEP, EOLI
Audible alarm(s)	✓	Packaging content	
Auto-restart	✓	Rack mount kit	✓
Ports & interfaces		Cables included	RS-232
AC outlet types	C19 coupler	Manual	✓
Power plug	Terminal	Weight & dimensions	
AC outlets quantity	8 AC outlet(s)	Width	432 mm
Number of output IEC jumpers	2	Depth	773 mm
Serial interface	✓	Height	533 mm
Serial interface type	RS-232	Weight	247.7 kg
Ethernet LAN (RJ-45) ports	1		
Cabling technology	10/100Base-T		
SmartSlot	✓		

Battery		Packaging data	
Battery technology	Sealed Lead Acid (VRLA)	Software CD	✓
Battery capacity	3840 VAh	Package width	610 mm
Typical backup time at full load	4.9 min	Package depth	1003 mm
Typical backup time at half load	15.2 min	Package height	990 mm
Battery life (max)	5 year(s)	Package weight	314.1 kg
Battery recharge time	2.5 h	Logistics data	
Hot-swap battery	✓	Products per pallet	1 pc(s)
Automatic battery test	✓	Harmonized System (HS) code	85078000
Cold start	✓	Total carbon footprint (kg of CO2e)	37662.44
		Other features	
		Nominal output voltage	230 V
		Nominal input voltage	230 V
		Packaging content	Web/SNMP Management Card

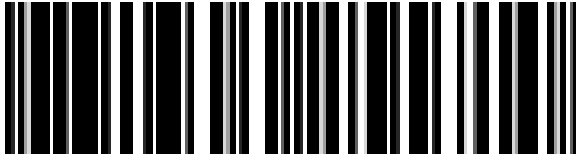

0731304255710



731304255710

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.