# AG Neovo PN-55D3 Écran plat de signalisation numérique 138,7 cm (54.6") LCD 500 cd/m² Full HD Noir 24/7

**Marque :** AG Neovo

**Nom du produit :** PN-55D3
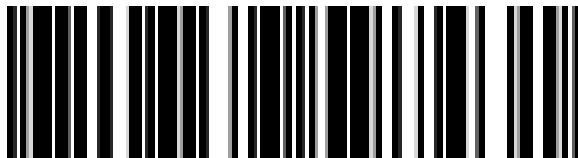
**Code produit:** PN5D3011E0000

AG Neovo PN-55D3. Design Produit: Écran plat de signalisation numérique. Taille de l'écran: 138,7 cm (54.6"), Technologie d'affichage: LCD, Résolution de l'écran: 1920 x 1080 pixels, Luminosité de l'écran: 500 cd/m², Type HD: Full HD. Operating hours (hours/days): 24/7. Couleur du produit: Noir

## Display

| | |
|---|---|
| Display diagonal * | 138.7 cm (54.6") |
| Display technology * | LCD |
| Display resolution * | 1920 x 1080 pixels |
| Display brightness * | 500 cd/m² |
| HD type * | Full HD |
| Touchscreen * | ✗ |
| Response time | 5 ms |
| Contrast ratio (typical) | 1200:1 |
| Viewing angle, horizontal | 178° |
| Viewing angle, vertical | 178° |
| Display number of colours | 1.07 billion colours |
| Pixel pitch | 0.63 x 0.63 mm |
| Display diagonal (metric) | 138.68 cm |
| Horizontal scan range | 31 - 92 kHz |
| Vertical scan range | 49 - 85 Hz |
| Haze rate | 28% |
| Surface hardness | 2H |

## Ports & interfaces

| | |
|---|---|
| HDMI ports quantity * | 1 |
| HDMI version | 2.0 |
| DVI port * | ✔ |
| DVI-D ports quantity | 1 |
| VGA (D-Sub) input ports | 1 |
| DisplayPorts quantity * | 2 |
| DisplayPorts in | 1 |
| DisplayPorts out | 1 |
| DisplayPort version | 1.2 |
| USB port * | ✔ |
| USB ports quantity | 1 |
| USB version | 2.0 |

## Design

| | |
|---|---|
| Panel mounting interface | 400 x 400 mm |
| Anti-glare screen | ✔ |

## Performance

| | |
|---|---|
| Purpose * | Universal |
| TV tuner integrated | ✗ |
| Operating hours (hours/days) | 24/7 |

## Power

| | |
|---|---|
| Power consumption (typical) * | 79 W |
| Power consumption (standby) * | 0.5 W |
| Power consumption (off) | 0 W |
| Energy efficiency class (SDR) | F |
| Energy consumption (SDR) per 1000 hours | 79 kWh |
| AC input voltage | 100 - 240 V |
| AC input frequency | 50 - 60 Hz |
| Energy efficiency scale | A to G |

## Computer system

| | |
|---|---|
| Computer system * | ✗ |
| Built-in processor * | ✗ |

## Weight & dimensions

| | |
|---|---|
| Display width | 1213.4 mm |
| Display depth | 102.7 mm |
| Display height | 684.2 mm |
| Display weight | 26.6 kg |

## Packaging data

| | |
|---|---|
| Package width | 1395 mm |
| Package depth | 280 mm |
| Package height | 838 mm |
| Package weight | 35.3 kg |

## Ports & interfaces

| | |
|---|---|
| Ethernet LAN * | ✔ |
| Ethernet LAN (RJ-45) ports | 1 |
| Wi-Fi * | ✘ |
| Audio (L/R) in | 1 |
| Audio (L/R) out | 1 |
| RS-232 interface | ✔ |
| Infrared data port | ✔ |
| Remote (IR) input | 1 |
| Remote (IR) output | 1 |
| OPS module slot | ✔ |

## Audio

| | |
|---|---|
| Built-in speaker(s) * | ✔ |
| Number of built-in speakers | 2 |
| RMS rated power | 10 W |

## Design

| | |
|---|---|
| Product design * | Digital signage flat panel |
| Placement supported * | Indoor |
| Orientation | Horizontal |
| Product colour * | Black |
| VESA mounting * | ✔ |

## Packaging content

| | |
|---|---|
| Remote control included | ✔ |
| Cables included | DVI, HDMI, IR sensor, RS-232 |

## Operational conditions

| | |
|---|---|
| Operating temperature (T-T) | 0 - 40 °C |
| Operating relative humidity (H-H) | 20 - 80% |
| Storage temperature (T-T) | -20 - 60 °C |
| Storage relative humidity (H-H) | 10 - 90% |

## Certificates

| | |
|---|---|
| Certification | CE ,LVD, WEEE, RoHS, REACH, UKCA, EAC, BSMI |

## Logistics data

| | |
|---|---|
| Harmonized System (HS) code | 85285210 |

## Technical details

| | |
|---|---|
| Compliance certificates | CE, Low Voltage Directive (LVD), REACH, RoHS, WEEE |

## Other features

| | |
|---|---|
| Manual | ✔ |
| Power cord included | ✔ |
| RS-232 input ports | 1 |
| RS-232 output ports | 1 |

**4710739597431**