brother

Brother HL-L5210DNTT imprimante laser 1200 x 1200 DPI A4

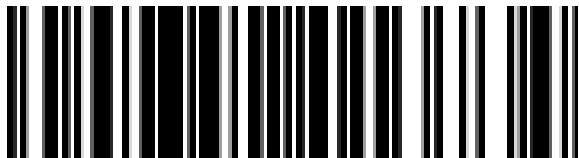**Marque :** Brother

Nom du produit : HL-L5210DNTT

Code produit: HL-L5210DNTT

Brother HL-L5210DNTT. Technologie d'impression: Laser. Nombre de cartouches d'impression: 1. Résolution maximale: 1200 x 1200 DPI. Taille de papier de série A ISO maximum: A4. Vitesse d'impression (noir, qualité normale, A4/US Letter): 48 ppm, Impression recto-verso. Écran: LCD, Couleur du produit: Noir, Blanc

Printing

Duplex printing mode	Auto
Colour *	✗
Print technology *	Laser
Duplex printing *	✔
Maximum resolution *	1200 x 1200 DPI
Print speed (black, normal quality, A4/US Letter) *	48 ppm
Duplex print speed (black, normal quality, A4/US Letter)	24 ppm
Time to first page (black, normal)	6.7 s
Watermark printing	✔
Secure printing	✔
N-up printing	4, 9, 16, 25
Booklet printing function	✔

Features

Recommended duty cycle	0 - 5000 pages per month
Printing colours *	Black
Number of print cartridges *	1
Page description languages *	BR-Script 3, Epson FX, PCL 6, PDF
Printer fonts	Bitmap, PCL, PostScript
Number of PCL fonts	73
Number of PostScript fonts	66
Number of bitmap fonts	12
Linear (1D) barcodes supported	Codabar, Code 128, Code 128A, Code 128B, Code 128C, Code 39, Code 93, EAN 128, EAN-13, EAN-8, GS1 DataBar, GS1 DataBar Expanded, GS1 Databar Limited, ISBN, MSI, PDF417, POSTNET, UPC-A, UPC-E

Network

Supported network protocols (IPv6)	NDP, RA, DNS resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, IPP/IPPS, FTP Server, TELNET Server, HTTP/HTTPS server, TFTP client and server, SMTP Client, SNMPv1/v2c/v3, ICMPv6, Web Services (Print), CIFS Client, SNTP Client, Syslog
Mobile printing technologies	Apple AirPrint, Brother iPrint & Scan, Mopria Print Service

Performance

Internal memory *	256 MB
Sound pressure level (printing)	54 dB
Sound pressure level (duplex printing)	54 dB
Sound pressure level (quiet mode)	50 dB
Sound power level (printing)	70.7 dB
Sound power level (standby)	49 dB

Design

Market positioning *	Business
Product colour *	Black, White
Built-in display *	✔
Display	LCD
Colour display	✗
Control type	Buttons

Power

Power consumption (printing) *	670 W
Power consumption (ready)	430 W
Power consumption (standby)	31 W
Power consumption (off)	0.05 W

Input & output capacity

Total number of input trays *	3
Total input capacity *	870 sheets
Total output capacity *	150 sheets
Paper tray 1 input capacity	250 sheets
Paper tray 2 input capacity	520 sheets
Multi-Purpose tray	✔
Multi-Purpose tray input capacity	100 sheets

Paper handling

Maximum ISO A-series paper size *	A4
Paper tray media types *	Envelopes, Letterhead, Plain paper, Recycled paper, Thin paper
ISO A-series sizes (A0...A9) *	A4, A5, A6
Non-ISO print media sizes	Folio, Legal, Letter
JIS B-series sizes (B0...B9)	B5
Envelopes sizes	C5, Com-10, DL, Monarch
Custom media width	69.8 - 215.9 mm
Custom media length	127 - 355.6 mm
Paper tray media weight	60 - 163 g/m²
Multi-Purpose Tray media weight	60 - 230 g/m²

Ports & interfaces

Direct printing *	✔
USB port *	✔
Optional connectivity	Wireless LAN

Network

Wi-Fi *	✘
Ethernet LAN *	✔
Cabling technology	10/100/1000Base-T(X)
Ethernet LAN data rates	10,100,1000 Mbit/s
Near Field Communication (NFC)	✔
Security algorithms	64-bit WEP, 128-bit WEP, WPA-AES, WPA-PSK, WPA-TKIP, WPA2-AES, WPA2-PSK, WPA2-TKIP, WPA3-SAE
Supported network protocols (IPv4)	ARP, RARP, BOOTP, DHCP, APIPA (Auto IP), WINS/NetBIOS name resolution, DNS Resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, IPP/IPPS, FTP Server, TELNET Server, HTTP/HTTPS server, TFTP client and server, SMTP Client, SNMPv1/v2c/v3, ICMP, Web Services (Print), CIFS client, SNTP client, Syslog

Power

Energy Star Typical Electricity Consumption (TEC)	0.59 kWh/week
AC input voltage	220 - 240 V
AC input frequency	50/60 Hz

System requirements

Windows operating systems supported	Windows 11
Mac operating systems supported	✔
Linux operating systems supported	✔
Other operating systems supported	ChromeOS

Operational conditions

Operating temperature (T-T)	10 - 32.5 °C
Storage temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	20 - 80%
Storage relative humidity (H-H)	35 - 85%

Weight & dimensions

Width	373 mm
Depth	388 mm
Height	421 mm
Weight	16.6 kg

Packaging data

Package width	485 mm
Package depth	450 mm
Package height	902 mm
Package weight	21.6 kg

Packaging content

Cartridge(s) included	✔
Included cartridge capacity (black)	3000 pages
Bundled software	Brother iPrint & Scan Desktop, Easy Setup

Other features

Emulations	PCL6, BR-Script3, IBM Proprinter XL, Epson FX-850, PDF Version 1.7

4002352013734