



TP-Link Omada EAP673 point d'accès réseaux locaux sans fil 5400 Mbit/s Blanc Connexion Ethernet, supportant l'alimentation via ce port (PoE)

Marque : TP-Link

Famille de produit: Omada

Code produit: EAP673

Nom du produit : EAP673

TP-Link Omada EAP673. 2,4 GHz, 5 GHz, Maximum data transfer rate: 5400 Mbit/s. Algorithme de sécurité soutenu: SNMP, SNMPv2, SNMPv3, WPA-Enterprise, WPA-Personal, WPA2-Enterprise, WPA2-Personal, WPA3-Enterprise. LAN Ethernet : taux de transfert des données: 10,100,1000,2500 Mbit/s. Connexion Ethernet, supportant l'alimentation via ce port (PoE). Couleur du produit: Blanc




Features		Management features	
2.4 GHz *	✓	Syslog	✓
5 GHz *	✓	Firmware upgradeable	✓
6 GHz *	✗	Ports & interfaces	
Maximum data transfer rate *	5400 Mbit/s	Ethernet LAN (RJ-45) ports *	1
Maximum data transfer rate (2.4 GHz)	574 Mbit/s	DC-in jack	✓
Maximum data transfer rate (5 GHz)	4804 Mbit/s	Power	
Ethernet LAN data rates	10,100,1000,2500 Mbit/s	Power over Ethernet (PoE) *	✓
Frequency band	2.4 - 5 GHz	DC voltage range	12 V
Networking standards	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11ax, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n	Design	
Number of users	250 user(s)	Placement *	Ceiling, Wall
Automatic channel selection	✓	Product colour *	White
Automatic channel scanning	✓	Reset button	✓
MIMO	✓	LED indicators	✓
MIMO type	Multi User MIMO	Antenna	
VLAN support	✓	Antenna type *	Internal
Virtual LAN features	VLAN mapping	Weight & dimensions	
Rate limiting	✓	Width	220 mm
Flow control support	✓	Depth	220 mm
Band steering	✓	Height	32.5 mm
Airtime Fairness (ATF)	✓	Packaging content	
Quality of Service (QoS) support	✓	Quantity per pack	1 pc(s)
BeamForming	✓	Mounting kit	✓
		Quick start guide	✓

Security		Operational conditions	
Security algorithms *	SNMP, SNMPv2, SNMPv3, WPA-Enterprise, WPA-Personal, WPA2-Enterprise, WPA2-Personal, WPA3-Enterprise	Operating relative humidity (H-H)	10 - 90%
		Operating temperature (T-T)	0 - 40 °C
Management features		Storage temperature (T-T)	-40 - 70 °C
		Storage relative humidity (H-H)	5 - 90%
Web-based management			



4895252506488

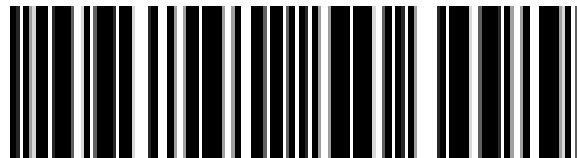

4895252506495



0840030711909



840030711909

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.