


Reolink NVS16 Noir

Marque : Reolink

Code produit: 6975253986552

Nom du produit : NVS16

Reolink NVS16. Canaux d'entrée vidéo: 16 canaux, Résolution maximale: 3840 x 2160 pixels, Number of simultaneously playbacked channels: 4 canaux. Capacité disque dur: 4 To, Capacité de stockage maximum: 12 To, Interface du disque dur: SATA. LAN Ethernet : taux de transfert des données: 10,100,1000 Mbit/s, Standards réseau: IEEE 802.3af, IEEE 802.3at, Protocoles réseau pris en charge: HTTPS, TCP/IP, UDP, DHCP, P2P, UPNP, RTMP, SMTP, SSL/TLS, DNS, DDNS, NTP. Couleur du produit: Noir. Consommation électrique (typique): 10 W, Tension de sortie: 48 - 54 V, Power over Ethernet (PoE) power per port: 25 W

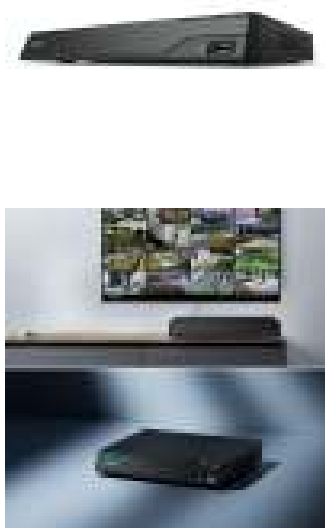

représentation / réalisation		Connectivité	
Canaux d'entrée vidéo *	16 canaux	Ethernet WAN	✓
Nombre de canaux lus simultanément	4 canaux	Sortie HDMI	✓
Modes d'enregistrement vidéo	720p, 1080p	Quantité de ports HDMI	1
Résolution maximale *	3840 x 2160 pixels	ports de sortie VGA (D-Sub)	1
Résolutions prises en charge	3840x2160, 1920x1080, 1280x1024, 1280x720, 1024x768	Quantité de Ports USB 2.0	2
Nombre d'utilisateurs	20 utilisateur(s)	Sorties RCA audio	1
Détecteur de mouvement (vidéo)	✓	Standards réseau	IEEE 802.3af, IEEE 802.3at
Format vidéo pris en charge	H.264, H.265	Protocoles réseau pris en charge	HTTPS, TCP/IP, UDP, DHCP, P2P, UPNP, RTMP, SMTP, SSL/TLS, DNS, DDNS, NTP
Caractéristiques Wireless LAN		Caractéristiques	
Wifi *	✗	Couleur du produit	Noir
Lecteur de disque		Puissance	
Quantité de disques durs installés *	1	Consommation électrique (typique)	10 W
Capacité disque dur *	4 To	Tension de sortie	48 - 54 V
Nombre de disque dur supporté	2	Port par alimentation PoE (Power over Ethernet)	25 W
Capacité de stockage installée totale	4 To	Configuration minimale du système	
Capacité de stockage maximum *	12 To		
Interface du disque dur *	SATA		
Connectivité		Conditions environnementales	
Nombre de port ethernet LAN (RJ-45) *	17		
Connexion Ethernet, supportant l'alimentation via ce port (PoE)	✓		
LAN Ethernet : taux de transfert des données	10,100,1000 Mbit/s	Température d'opération	-10 - 45 °C
Power over Ethernet (PoE) Nombre de ports	16	Humidité relative de fonctionnement (H-H)	10 - 90%
		Poids et dimensions	
		Largeur	330 mm
		Profondeur	285 mm
		Hauteur	45 mm
		Poids	1,8 kg



6975253986552

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 19-OCT-2024. Prints or copies of Information are only valid on the printed Publication date