


Epson DS-C490 Chargeur automatique de documents + Scanner à feuille 600 x 600 DPI A4 Noir, Blanc

Marque : Epson


Code produit: B11B271401

Nom du produit : DS-C490

Epson DS-C490. Surface maximal de numérisation: 215,9 x 5588 mm, Résolution de numérisation optique: 600 x 600 DPI, Profondeur d'affichage d'entrée de couleur: 30 bit. Type de scanner: Chargeur automatique de documents + Scanner à feuille, Couleur du produit: Noir, Blanc, Type de commande: Boutons. Cycle de fonctionnement par jour (max): 6500 pages, Source lumineuse: ReadyScan LED, Numériser vers: E-mail, FTP, Network folder, Impression. Capacité d'entrée standard: 20 feuilles. Taille de papier de série A ISO maximum: A4, Prise en charge des types de numérisation de support: Carte de visite, Papier plastifié, Carte postale (JPN), ISO, Format Series A (A0...A9): A4, A5, A6



Scanning		Paper handling	
Maximum scan size *	215.9 x 5588 mm	Paper tray media weight	40 - 413 g/m ²
Optical scanning resolution *	600 x 600 DPI	Ports & interfaces	
Duplex scanning *	✓	USB port *	✓
Input colour depth	30 bit	USB version	2.0
Output colour depth	24 bit	Power	
Output monochrome depth	8 bit	Power supply type *	AC
Design		Power consumption (typical)	10 W
Scanner type *	ADF + Sheet-fed scanner	Power consumption (standby)	1 W
Product colour *	Black, White	Power consumption (PowerSave)	4 W
Control type	Buttons	Input voltage	100 - 240 V
Built-in display *	✗	Weight & dimensions	
Performance		Width	296 mm
Light source	ReadyScan LED	Depth	104 mm
Daily duty cycle (max) *	6500 pages	Height	125 mm
Scan to	E-mail, FTP, Network folder, Print	Weight	1.9 kg
Scan drivers	ICA, ISIS, SANE, WIA	System requirements	
Input capacity		Windows operating systems supported	Windows 10, Windows 11, Windows 7, Windows 8
Standard input capacity	20 sheets	Server operating systems supported	Windows Server 2003, Windows Server 2008, Windows Server 2008 R2, Windows Server 2012 R2, Windows Server 2012 x64, Windows Server 2016
Paper handling		Operational conditions	
Scanning media types supported	Business Card, Plastic Card, Post Card(JPN)	Operating temperature (T-T)	5 - 35 °C
Maximum ISO A-series paper size *	A4	Storage temperature (T-T)	-25 - 60 °C
ISO A-series sizes (A0...A9)	A4, A5, A6	Operating relative humidity (H-H)	15 - 80%
ISO B-series sizes (B0...B9)	B5, B6	Storage relative humidity (H-H)	15 - 85%
Letter	✓		
Legal	✓		

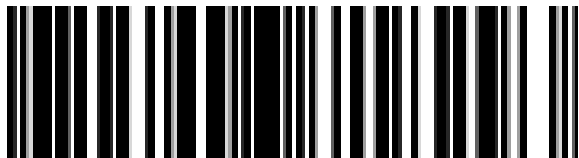

8715946718293

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 19-DEC-2024. Prints or copies of Information are only valid on the printed Publication date