



Brother ADS-4900W scanner Chargeur automatique de documents + Scanner à feuille 600 x 600 DPI A4 Noir, Blanc

Marque : Brother

Code produit: ADS-4900W

Nom du produit : ADS-4900W - Scanner bureautique professionnel

- Vitesse de numérisation jusqu'à 60 pages par minute
- Numérisation en recto-verso jusqu'à 120 images par minute
- Chargeur automatique de documents (ADF) de 100 feuilles
- Connectivités Wi-Fi 5GHz et Ethernet
- USB 3.0 SuperSpeed
- Numérisation directe vers une clé USB

Avec connectivités Ethernet et Wi-Fi haut débit écran tactile personnalisable en fonction du profil utilisateur. Idéal pour la numérisation de plusieurs lots de documents, pour des besoins en haut volume de numérisation, pour la numérisation sécurisée et pour la gestion des flux de travail collaboratifs complexes.



Scanning		Network	
Maximum scan size *	215.9 x 355.6 mm	Supported network protocols (IPv4)	DHCP, APIPA (Auto IP), WINS/NetBIOS, DNS Resolver, mDNS, SNMPv1/v2c/v3, ICMP, Web Services(Scan), HTTP/HTTPS server, LLNMR responder, SNTF Client, LDAP
Optical scanning resolution *	600 x 600 DPI		
Enhanced scan resolution	1200 x 1200 DPI		
Colour scanning	✓		
Duplex scanning *	✓	IPv6 support	✓
Input colour depth	48 bit	Power	
Output colour depth	24 bit	Power supply type *	AC
Output greyscale depth	8 bit	Power consumption (typical)	34 W
Greyscale levels	256	Power consumption (standby)	7.7 W
ADF scan speed (b/w, A4)	60 ppm	Power consumption (off)	0.1 W
ADF scan speed (colour, A4)	60 ppm	Sleep mode	✓
Duplex ADF scan speed (b/w, A4)	120 ipm	Power consumption (sleep)	1.7 W
Duplex ADF scan speed (colour, A4)	120 ipm	Output voltage	24 V
Design		Output current	1.9 A
Scanner type *	ADF + Sheet-fed scanner	Auto power off	✓
Product colour *	Black, White	Weight & dimensions	
Display	LCD	Width	288 mm
Display diagonal	10.9 cm (4.3")	Depth	334 mm
Touchscreen	✓	Height	393 mm
Colour display	✓	Weight	3.81 kg
Control type	Touch	Packaging data	
Built-in display *	✓	Quantity per pack	1 pc(s)
Performance		Package width	393 mm
Sensor type *	Dual CIS	Package depth	288 mm
Light source	LED	Package height	334 mm
Scan file formats	JPEG, PDF, TIFF	Package weight	4.6 kg
Daily duty cycle (max) *	9000 pages		


Performance		Packaging content	
Maximum duty cycle	180000 pages per month	Cables included	AC, USB
Scan to	E-mail Server, FTP, HTTP, PC, SMB	System requirements	
Scan drivers	ISIS, SANE, TWAIN, WIA	Windows operating systems supported	✓
Ultrasonic sensor	✓	Mac operating systems supported	✓
Scanning noise level	62 dB	Linux operating systems supported	✓
Input capacity		Server operating systems supported	Windows Server 2012 R2, Windows Server 2016, Windows Server 2019
Auto document feeder (ADF) input capacity	100 sheets	Operational conditions	
Paper handling		Operating temperature (T-T)	5 - 35 °C
Scanning media types supported	Business Card, Plain paper, Plastic Card, Recycled paper, Thick paper, Thin paper	Storage temperature (T-T)	-20 - 60 °C
Long-paper mode	✓	Operating relative humidity (H-H)	20 - 80%
Maximum ISO A-series paper size *	A4	Storage relative humidity (H-H)	10 - 90%
Media thickness (min)	0.08 mm	Other features	
Card thickness (max)	1.32 mm	Cable lock slot	✓
Paper tray media weight	25 - 413 g/m²	Certification	GS Mark, WHQL, WHQL, ISIS, Wi-Fi CERTIFIED - WPA3 Enterprise, WPA3 Personal, Wi-Fi Protected Setup, Wi-Fi Direct, KofaxTM 5,10 - VRS Elite 5.2.0, Kofax Express 3.3.0
Auto Document Feeder (ADF) media weight	25 - 413 g/m²		
Maximum scan width	21.6 cm		
Maximum scan length	5 m	Technical details	
Ports & interfaces		Pallet type	800 x 1200 mm
USB port *	✓	Logistics data	
USB version	2.0/3.2 Gen 1 (3.1 Gen 1)	Products per pallet	40 pc(s)
Network		Country of origin	China
Wi-Fi	✓	Master (outer) cases per pallet	40 pc(s)
Wi-Fi standards	802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n)	Layers per pallet	5 pc(s)
Ethernet LAN	✓	Pallet gross weight	186 kg
Security algorithms	AES, EAP-FAST, EAP-MD5, EAP-TLS, EAP-TTLS, HTTPS, PEAP, SMTP-AUTH, SNMPv3, SSL/TLS, TKIP, TLS, WEP, WPA-PSK, WPA2-AES, WPA2-PSK, WPA3	Pallet gross height	18.1 cm
	RA, DNS Resolver, mDNS, LLNMR responder, Web Services(Scan), SNMP Client, HTTP/HTTPS server, ICMPv6	Master (outer) cases per pallet layer	8 pc(s)
Supported network protocols (IPv6)		Harmonized System (HS) code	84716070



0012502666363



012502666363

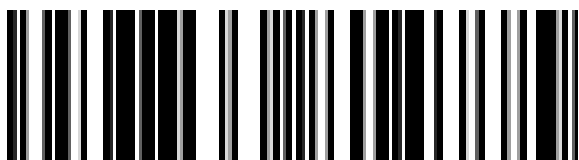

4977766814775

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.