

ASUS ESC8000A-E12-SKU1 LGA 6096 Rack (4 U) Argent

Marque : ASUS

Code produit: 90SF02H1-M000K0

Nom du produit : ESC8000A-E12-SKU1

ASUS ESC8000A-E12-SKU1. Socket de processeur (réceptable de processeur): LGA 6096, Processeurs compatibles: AMD EPYC 9004. Types de mémoire pris en charge: DDR5-SDRAM, Tailles de DIMM supportées: 256GB, 16GB, 32GB, 64GB, 128GB, Mémoire interne maximale: 6 To. Tailles de disque de stockage pris en charge: 2.5,3.5", Types de lecteurs de stockage pris en charge: HDD & SSD, Interfaces de lecteur de stockage prises en charge: SATA, Série Attachée SCSI (SAS). Type d'interface Ethernet: Gigabit Ethernet, LAN Ethernet : taux de transfert des données: 10,100,1000 Mbit/s, Contrôleur de réseau local (LAN): Intel® I350. Type de châssis: Rack (4 U), Couleur du produit: Argent



Processor		Ports & interfaces	
Built-in processor *	✗	VGA (D-Sub) ports quantity	1
Processor socket *	LGA 6096	Expansion slots	
Number of processors supported *	2	PCI Express x8 slots	2
Compatible processor series	AMD EPYC 9004	PCI Express x16 slots	9
Memory		Number of M.2 (M) slots	1
Number of DIMM slots *	24	Features	
Supported memory types *	DDR5-SDRAM	Trusted Platform Module (TPM)	✓
Supported DIMM module capacities	256GB, 16GB, 32GB, 64GB, 128GB	Trusted Platform Module (TPM) version	2.0
Maximum internal memory	6 TB	Design	
Supported RDIMM clock speeds	4400,4800 MHz	Chassis type *	Rack (4U)
Storage		Product colour	Silver
Number of storage drives supported *	9	Power	
Hot-swap HDD bays *	✓	Power supply *	3000 W
Storage drive sizes supported	2.5,3.5"	Number of main power supplies	4
Supported storage drive types	HDD & SSD	AC input voltage	220 - 240 V
Supported storage drive interfaces	Serial ATA, Serial Attached SCSI (SAS)	AC input frequency	50/60 Hz
Network		80 PLUS certification	80 PLUS Titanium
Ethernet LAN	✓	Operational conditions	
Ethernet interface type	Gigabit Ethernet	Operating temperature (T-T)	10 - 35 °C
Ethernet LAN data rates	10,100,1000 Mbit/s	Storage temperature (T-T)	-40 - 70 °C
LAN controller	Intel® I350	Storage relative humidity (H-H)	20 - 90%
Ports & interfaces		Weight & dimensions	
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	2	Width	800 mm
Ethernet LAN (RJ-45) ports *	2	Depth	440 mm
		Height	174.5 mm

Ports & interfaces


IPMI LAN (RJ-45) port ✓

Weight & dimensions

Weight 27 kg

Packaging data

Package weight 52 kg

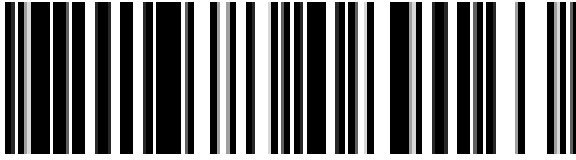

4711387089163

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 19-MAR-2025. Prints or copies of Information are only valid on the printed Publication date