



TP-Link InSight S245 Dôme Caméra de sécurité IP Extérieur 2688 x 1520 pixels Plafond

Marque : TP-Link

Code produit: INSIGHT S245(2.8MM)


Nom du produit : InSight S245

TP-Link InSight S245. Type: Caméra de sécurité IP, Installation prise en charge: Extérieur, Technologie de connectivité: Avec fil. Type de montage: Plafond, Couleur du produit: Blanc, Élément de format: Dôme. Lens viewing angle, horizontal: 110°, Lens viewing angle, vertical: 58.1°, Lens viewing angle, diagonal: 133.5°. Type de capteur: CMOS, Taille du capteur optique: 25,4 / 2,7 mm (1 / 2.7"). Detect distance: 64 m, Observe distance: 27 m, Recognize distance: 13 m



Performance		Audio	
Type *	IP security camera	Audio system	2-way
Placement supported *	Outdoor	Audio input channels	1 channels
Connectivity technology *	Wired	Audio output channels	1 channels
Maximum operating distance	64 m	Audio formats supported	G.711 A-law
Wide Dynamic Range (WDR)	✓	Sample rate	8 kHz
Day/night mode	✓	Built-in microphone	✓
Infrared (IR) cut-off filter	✓	Number of microphones	1
Remote viewing	✓	Bit rate range	0 - 64 Kbit/s
Dynamic range	120 dB	Network	
Design		Ethernet LAN *	✓
Form factor *	Dome	Networking standards	IEEE 802.3af, IEEE 802.3at
Mounting type *	Ceiling	Supported network protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP, UDP, SSL/TLS, FTP/SFTP, RTP, IPv4, IPv6, ARP
Product colour *	White	Wi-Fi *	✗
Housing material	Metal	Bluetooth *	✗
Protection features	Waterproof	Live view	✓
International Protection (IP) code	IP67	Storage	
IK code	IK10	Compatible memory cards	MicroSD (TransFlash)
Weatherproof	✓	Maximum memory card size	512 GB
Camera		Ports & interfaces	
Camera pan control	✓	Ethernet LAN (RJ-45) ports	1
Camera tilt control	✓	DC-in jack	✓
Minimum illumination	0 lx	Security	
Lens viewing angle, horizontal	110°	Built-in siren	✓
Lens viewing angle, vertical	58.1°	Password protection	✓
Lens viewing angle, diagonal	133.5°	Video motion detection	✓
Tilt angle range	0 - 75°	IP address filtering	✓
Camera shutter speed	1/3 to 1/10000		
Image sensor			
Optical sensor size	25.4 / 2.7 mm (1 / 2.7")		
Progressive scan	✓		

Image sensor		Security	
Sensor type *	CMOS	HTTPS encryption	✓
Lens system		Detection distance	64 m
Detect distance	64 m	Alert notification type	Push notification
Observe distance	27 m	Intelligent Video Surveillance (IVS) system features	Abnormal sound detection, Crossing line, Human detection, Intrusion, Line crossing detection, Moving object, Region entrance detection, Region exiting detection, Scene change, Vehicle detection
Recognize distance	13 m		
Maximum aperture number	1.6		
Identify distance	6 m		
Fixed focal length	2.8 mm	Motion sensor	✓
Night vision		Mirror	✓
Night vision *	✓	Human and vehicle targets classification	✓
LED type	IR/White	Digest authentication	✓
Video		Management features	
Maximum resolution *	2688 x 1520 pixels	Web-based management	✓
Total megapixels *	4 MP	Web browser	✓
Video compression formats	H.264, H.264+, H.265, H.265+	Cloud-managed *	✓
Supported graphics resolutions	1280 x 720 (HD 720), 1920 x 1080 (HD 1080), 2048 x 1280, 2304 x 1296, 2560 x 1440, 2688 x 1520	Reset button	✓
Video recording	✓	Power	
Image quality adjustment	Brightness, Contrast, Mirror, Saturation, Sharpness	Power source type *	DC, PoE
Bit rate control	Constant Bit Rate (CBR)/Variable Bit Rate (VBR)	Power consumption (Power over Ethernet (PoE))	12.52 W
Bit rate	Main Stream: H.265+/H.265/H.264+/H.264, Sub-Stream: H.265/H.264	DC output voltage	12
Back Light Compensation (BLC)	✓	Operational conditions	
Highlight Compensation (HLC)	✓	Operating temperature (T-T)	-30 - 60 °C
Digital Wide Dynamic Range (DWDR)	✓	Storage temperature (T-T)	-40 - 60 °C
Audio		Operating relative humidity (H-H)	0 - 95%
Built-in speaker(s)	✓	Storage relative humidity (H-H)	0 - 95%
		Weight & dimensions	
		Width	122 mm
		Depth	122 mm
		Height	89 mm
		Weight	620 g
		Packaging content	
		Number of cameras *	1
		Manual	✓

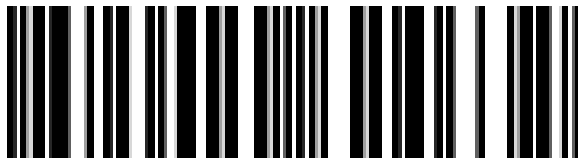

8885020624632

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 02-APR-2025. Prints or copies of Information are only valid on the printed Publication date