

EPOS IMPACT SC 30 USB ML Headset Bedraad Hoofdband Oproepen/muziek USB Type-A Zwart

Merk : EPOS**Productfamilie:** EPOS**Artikelcode:** 1000550**Productnaam :** IMPACT SC 30
USB ML

IMPACT SC 30 USB ML

EPOS IMPACT SC 30 USB ML Headset Bedraad Hoofdband Oproepen/muziek USB Type-A Zwart:

Bedrade, enkelzijdige headset met USB-connectiviteit op pc/softphone. UC-geoptimaliseerd en gecertificeerd voor Skype for Business. Geniet van natuurlijk klinkende gesprekken, audio van hoge kwaliteit en eenvoudige gespreksafhandeling voor uw hele personeel.

EPOS IMPACT SC 30 USB ML. Producttype: Headset. Connectiviteitstechnologie: Bedraad. Aanbevolen gebruik: Oproepen/muziek. Frequentiebereik koptelefoon: 60 - 16000 Hz. Lengte snoer: 2,1 m. Gewicht: 42 g. Kleur van het product: Zwart




Prestatie		Verpakking	
Producttype *	Headset	Breedte van de verpakking	140 mm
Draagwijze *	Hoofdband	Diepte van de doos	170 mm
Aanbevolen gebruik *	Oproepen/muziek	Hoogte van de verpakking	60 mm
Headset type	Monauraal	Gewicht pakket	106 g
Kleur van het product *	Zwart	Inhoud van de verpakking	
Soort bediening	Knoppen	Snelstartgids	✓
Lengte snoer	2,1 m	Veiligheidsblad	✓
Kleur kabel	Zwart	Oordopjes	✓
Poorten & interfaces		Aantal	1
Connectiviteitstechnologie *	Bedraad	Logistics data	
USB-aansluiting	✓	Code geharmoniseerd systeem (HS)	85183000
USB-connector	USB Type-A	Breedte van de omdoos	390 mm
Hoofdtelefoon		(Buitenste) hoofdverpakking lengte	455 mm
Positie speakers koptelefoon *	Supraaural	Hoogte van de omdoos	320 mm
Akoestisch systeem	Open	(Buitenste) hoofdverpakking brutogewicht	6,15 kg
Frequentiebereik koptelefoon	60 - 16000 Hz	Hoeveelheid per (buitenste) hoofdverpakking	40 stuk(s)
Gevoeligheid koptelefoon	113 dB	(Binnenste) verzendverpakking breedte	14 cm
Soort magneet	Neodymium	(Binnenste) verzendverpakking lengte	17 cm
Ruisonderdrukking	✓	(Binnenste) verzendverpakking hoogte	6 cm
Microfoon		(Binnenste) verzendverpakking gewicht	106 g
Microfoontype *	Boom	Supplier features	
Frequentie microfoon	150 - 6800 Hz	Regelbaar volume	✓
Microphone direction type	Unidirectioneel		
Ruisonderdrukking microfoon	✓		
Microfoon mute	✓		
Eisen aan de omgeving			
Temperatuur, in bedrijf	0 - 40 °C		

Gewicht en omvang

Gewicht	42 g
---------	------




4044155083378

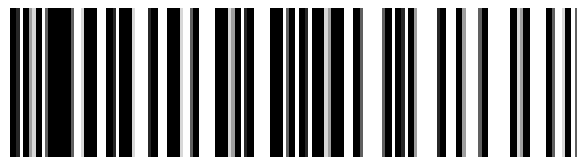

0615104236837




615104236837

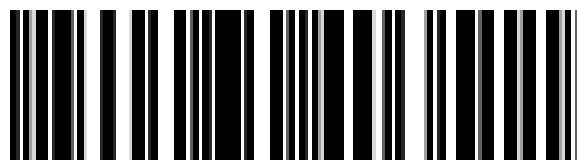

0840064403511



840064403511

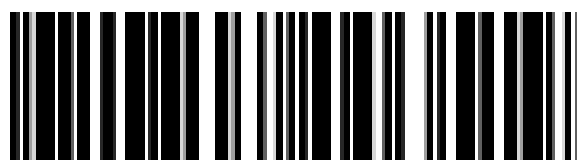

5714708003519

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 26-OCT-2024. Prints or copies of Information are only valid on the printed Publication date