

Zyxel GS1100-16 Unmanaged Gigabit Ethernet (10/100/1000)

Merk : Zyxel

Artikelcode: GS1100-16-EU0103F

Productnaam : GS1100-16


- Niet-blokkerende, wire-speed connectiviteit met 16 Gigabit Ethernet-poorten
- Geen ventilator voor fluisterstille werking
- Bespaart energie met de Green Ethernet-functies

GS1100-16 Revision B1 - 16-port GbE Unmanaged

Zyxel GS1100-16. Switch type: Unmanaged. Type basis-switching RJ-45 Ethernet-poorten: Gigabit Ethernet (10/100/1000), Aantal basis-switching RJ-45 Ethernet-poorten: 16. MAC-adrestabel: 8000 entries, Switchingcapaciteit: 32 Gbit/s. Netwerkstandaard: IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3az, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z. Ophangstelsysteem voor aan de muur, Rack-montage



Beheerfuncties		Prestatie	
Switch type *	Unmanaged	Mean time between failures (MTBF)	1156942 uur
Poorten & interfaces		Energie	
Aantal basis-switching RJ-45 Ethernet-poorten *	16	Vermogenstoevoer inclusief *	✓
Type basis-switching RJ-45 Ethernet-poorten *	Gigabit Ethernet (10/100/1000)	Aantal voedingen	1
Netwerk		AC invoer voltage	100 - 240 V
Netwerkstandaard *	IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3az, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z	AC invoer frequentie	50 - 60 Hz
10G support *	✗	Vermogensverbruik (max)	10 W
Ondersteundende kabel types	Cat3, Cat4, Cat5, Cat5e, Cat6	Power over Ethernet (PoE)	
Datastroombeheer	✓	Power over Ethernet (PoE) *	✗
Auto MDI/MDI-X	✓	Eisen aan de omgeving	
Active Link-detectie	✓	Temperatuur, in bedrijf	0 - 40 °C
Data-uitwisseling		Temperatuur bij opslag	-40 - 70 °C
Switchingcapaciteit *	32 Gbit/s	Relatieve luchtvochtigheid, in bedrijf	10 - 90 procent
Verzending snelheid	23,8 Mpps	Luchtvochtigheid bij opslag	10 - 95 procent
MAC-adrestabel *	8000 entries	Warmtedissipatie	32,86 BTU/h
Jumbo Frames ondersteuning	✓	Gewicht en omvang	
Jumbo frames	9216	Breedte	215 mm
Packet buffergeheugen	0,5 MB	Diepte	133 mm
Design		Hoogte	42 mm
Rack-montage *	✓	Gewicht	900 g
LED-indicatoren	Activiteit, Link, Stroom	Inhoud van de verpakking	
Ophangstelsysteem voor aan de muur	✓	Meegeleverde kabels	Sector
Elektromagnetische compatibiliteit	CE, FCC, RCM, ICES-003, BSMI	Rekbevestigingspakket	✓
Prestatie		Verpakking	
Fanloos	✓	Verpakkingstype	Pak
Certificaten			
		Certificering	LVD, BSMI RoHS, REACH
Logistics data			
		Code geharmoniseerd systeem (HS) 85176990	

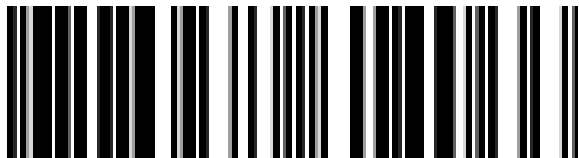

4718937614066

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 26-OCT-2024. Prints or copies of Information are only valid on the printed Publication date