





LevelOne GNC-0202 netwerkkaart Intern Fiber

Merk : LevelOne
Productnaam : GNC-0202

Artikelcode: GNC-0202




LevelOne GNC-0202. Intern. Connectiviteitstechnologie: Bedraad, Hostinterface: PCI Express, Interface: Fiber. Kleur van het product: Aluminium




Poorten & interfaces		Gewicht en omvang	
Connectiviteitstechnologie *	Bedraad	Breedte	165 mm
Hostinterface *	PCI Express	Diepte	69 mm
Interface *	Fiber	Hoogte	17 mm
Fibre channel-poorten	2	Gewicht	110 g
Vezel-optische connector	SFP+	Verpakking	
PCI versie	2.0	Aantal	1
Netwerk		Meegeleverde drivers	✓
Netwerkstandaard *	IEEE 802.1Q, IEEE 802.1p, IEEE 802.3, IEEE 802.3ad	Verpakkingstype	Pak
Ethernet interface type	10 Gigabit	Breedte van de verpakking	145 mm
Wake-on-LAN	✓	Diepte van de doos	220 mm
Jumbo Frames ondersteuning	✓	Hoogte van de verpakking	30 mm
Jumbo frames	9,5	Gewicht pakket	62 g
iSCSI support	✓	Inhoud van de verpakking	
Design		Montagebeugels meegeleverd	✓
Kleur van het product	Aluminium	Snelle installatiehandleiding	✓
Intern *	✓	Gebruikershandleiding	✓
LED-indicatoren	Activiteit, Link	Logistics data	
Minimale systeemeisen		Code geharmoniseerd systeem (HS)	85176990
Ondersteunt Windows	Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 8, Windows 8.1, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64	Overige specificaties	
	Windows Server 2003, Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2	Gegevensoverdrachtsnelheid	5 GT/s
Ondersteunde server operating systems		Intel Virtualization Technology	VT-c
Eisen aan de omgeving		Intel Virtual Machine Device Queues (VMDq)	✓
Temperatuur, in bedrijf		PCI-SIG* SR-IOV Capable	✓
		Netvoeding	6,5 W

Eisen aan de omgeving

Temperatuur bij opslag	-40 - 70 °C
Relatieve luchtvochtigheid, in bedrijf	5 - 95 procent
Luchtvochtigheid bij opslag	5 - 95 procent

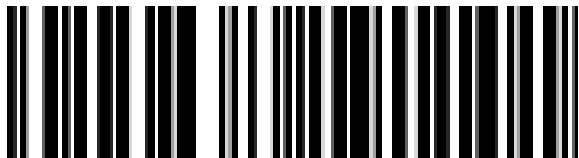

4015867191101

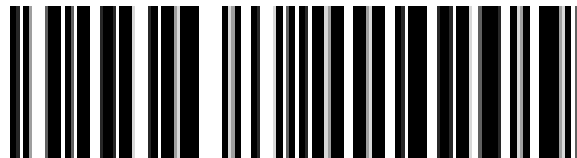

4015867224205

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 31-OCT-2024. Prints or copies of Information are only valid on the printed Publication date