

NETGEAR XS505M Unmanaged 10G Ethernet (100/1000/10000) Grijs, Zilver

Merk : NETGEAR

Artikelcode: XS505M-100EUS

Productnaam : XS505M

NETGEAR XS505M. Switch type: Unmanaged. Type basis-switching RJ-45 Ethernet-poorten: 10G Ethernet (100/1000/10000), Aantal basis-switching RJ-45 Ethernet-poorten: 4. Full duplex. MAC-adrestabel: 2000 entries, Switchingcapaciteit: 100 Gbit/s. Netwerkstandaard: IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3ae, IEEE 802.3an, IEEE 802.3aq, IEEE 802.3az,.... Power connector: DC-in ingang. Rack-montage



Management features

Switch type *	Unmanaged
Quality of Service (QoS) support	✓

Ports & interfaces

Basic switching RJ-45 Ethernet ports quantity *	4
Basic switching RJ-45 Ethernet ports type *	10G Ethernet (100/1000/10000)
SFP+ module slots quantity	1
Power connector	DC-in jack

Network

Networking standards *	IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3ae, IEEE 802.3an, IEEE 802.3aq, IEEE 802.3az, IEEE 802.3bz, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z
10G support *	✓
Full duplex	✓
Flow control support	✓

Data transmission

Switching capacity *	100 Gbit/s
MAC address table *	2000 entries
Jumbo frames support	✓
Jumbo frames	9000
Packet buffer memory	128 MB

Design

Rack mounting *	✓
Product colour	Grey, Silver
LED indicators	✓

Safety	CE: CB 60950-1, LVD 60950-1, AUS/NZ: AS/NZS 60950-1, USA: UL 60950-1, SNE VA, BSMI
--------	--

Performance

Mean time between failures (MTBF)	1093237 h
-----------------------------------	-----------

Power

Power source *	AC
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Input current	1.5 A
Power consumption (typical)	12.25 W
Power consumption (max)	22.5 W

Power over Ethernet (PoE)

Power over Ethernet (PoE) *	✗
-----------------------------	---

Operational conditions

Operating temperature (T-T)	0 - 50 °C
Storage temperature (T-T)	-20 - 70 °C
Operating relative humidity (H-H)	0 - 95%
Storage relative humidity (H-H)	0 - 95%
Operating altitude	0 - 3000 m
Heat dissipation	85.3 BTU/h

Weight & dimensions


Width	328 mm
Depth	169 mm
Height	43.2 mm
Weight	1.38 kg

Certificates

Certification	47 CFR FCC, ICES-003:2016 Issue 6, ANSI C63.4:2014, EN 55032:2012+AC2013, EN 55024:2010, EN 61000-3-2:2014, EN 6100-3-3:2013, AS/NZS CISPR 32:2015, VCCI V-3/2015.04, V-4/2012.4, CNS 13438
---------------	---

Logistics data

Harmonized System (HS) code	85176990
-----------------------------	----------

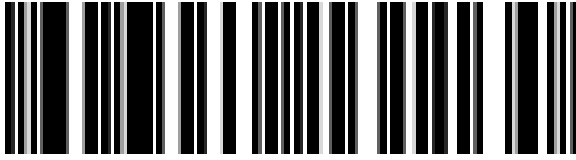

0606449131130



606449131130

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.