

NETGEAR GS348PP Unmanaged Gigabit Ethernet (10/100/1000) Power over Ethernet (PoE) Zwart


Merk : NETGEAR

Artikelcode: GS348PP-100EUS

Productnaam : GS348PP

NETGEAR GS348PP. Switch type: Unmanaged. Type basis-switching RJ-45 Ethernet-poorten: Gigabit Ethernet (10/100/1000), Aantal basis-switching RJ-45 Ethernet-poorten: 48. Full duplex. MAC-adrestabel: 8000 entries, Switchingcapaciteit: 96 Gbit/s. Netwerkstandaard: IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3at, IEEE 802.3az, IEEE 802.3i, IEEE 802.3u. Power over Ethernet (PoE). Rack-montage

Management features		Performance	
Switch type *	Unmanaged	Mean time between failures (MTBF)	570972 h
Quality of Service (QoS) support	✓	Power	
Ports & interfaces		AC input voltage	110 - 240 V
Basic switching RJ-45 Ethernet ports quantity *	48	AC input frequency	50 - 60 Hz
Basic switching RJ-45 Ethernet ports type *	Gigabit Ethernet (10/100/1000)	Power consumption (max)	410 W
Network		Power over Ethernet (PoE)	
Networking standards *	IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3at, IEEE 802.3az, IEEE 802.3i, IEEE 802.3u	Power over Ethernet (PoE) *	✓
10G support *	✗	Power over Ethernet (PoE) ports quantity	24
Copper ethernet cabling technology	10BASE-T, 100BASE-TX, 1000BASE-T	Power over Ethernet (PoE) power per port	30 W
Full duplex	✓	Total Power over Ethernet (PoE) budget	380 W
Auto MDI/MDI-X	✓	Operational conditions	
Auto-sensing	✓	Operating temperature (T-T)	0 - 45 °C
Auto-negotiation	✓	Storage temperature (T-T)	-20 - 70 °C
Cable length detection	✓	Operating relative humidity (H-H)	10 - 90%
Data transmission		Storage relative humidity (H-H)	10 - 95%
Switching capacity *	96 Gbit/s	Operating altitude	0 - 3000 m
Forwarding rate	1.448 Mpps	Heat dissipation	1402.2 BTU/h
MAC address table *	8000 entries	Weight & dimensions	
Latency (1 Gbps)	4 µs	Width	440 mm
Jumbo frames support	✓	Depth	310 mm
Jumbo frames	12288	Height	43 mm
Packet forwarding rate (1 Gbps)	1448000 pps	Weight	4.56 kg
Packet buffer memory	1.5 MB	Packaging content	
Security		Cables included	AC
Queue scheduling algorithms	Weighted Round Robin (WRR)	User guide	✓
Design		Rack mount kit	✓
Rack mounting *	✓	Certificates	
Product colour	Black	Certification	CE, FCC 15 A, IC A, RCM, VCCI, KC CB, CE LVD, UL
Housing material	Metal	Logistics data	
LED indicators	Activity, Link, PoE, Power, Speed	Harmonized System (HS) code	85176990
Number of fans	2 fan(s)		

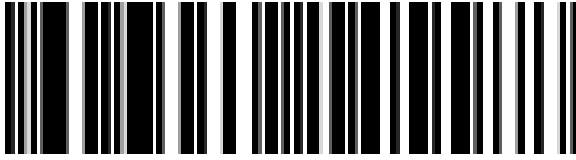

0606449145588



606449145588

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 10-DEC-2024. Prints or copies of Information are only valid on the printed Publication date