

CyberPower OL1000ERTXL2U UPS Dubbele conversie (online) 1 kVA 900 W 8 AC-uitgang(en)

Merk : CyberPower

Artikelcode: OL1000ERTXL2U

Productnaam : OL1000ERTXL2U




CyberPower OL1000ERTXL2U. UPS-topologie: Dubbele conversie (online), Output power capacity (VA): 1 kVA, Uitgangsvermogen: 900 W. AC outlet types: C13 stekker, Stekker: C14 stekker, Aantal AC uitgangen: 8 AC-uitgang(en). Energie-opslagtechnologie accu/batterij: Sealed Lead Acid (VRLA), Typische backup tijd op volledige lading: 6 min, Typische backup tijd op halve lading: 18 min. Form factor: Rackmontage/toren, Kleur van het product: Zwart, Materiaal behuizing: Metaal. Compliance certificates: C-TICK, CE, RCM, RoHS




| Features | | Battery | |
|---|--------------------------------|-----------------------------------|-----------------------|
| UPS topology * | Double-conversion (Online) | Hot-swap battery | ✓ |
| Output power capacity * | 1 kVA | Cold start | ✓ |
| Output power * | 900 W | Design | |
| Waveform * | Pure sine | Form factor * | Rackmount/Tower |
| Input operation voltage (min) * | 190 V | Housing material | Metal |
| Input operation voltage (max) * | 300 V | Rack capacity | 2U |
| Input frequency * | 40/70 Hz | Cooling type | Active |
| Output operation voltage (min) | 200 V | Built-in fan | ✓ |
| Output operation voltage (max) | 240 V | Product colour * | Black |
| Output frequency | 50/60 Hz | Control type | Buttons |
| Maximum current | 5 A | Display type | LCD |
| Surge energy rating | 1780 J | LED indicators | ✓ |
| Response time | 0 ms | Operational conditions | |
| Heat dissipation | 341 BTU/h | Operating temperature (T-T) | 0 - 40 °C |
| Output power factor | 0.9 | Storage temperature (T-T) | -20 - 45 °C |
| Emergency Power Off (EPO) | ✓ | Operating relative humidity (H-H) | 0 - 90% |
| Total Harmonic Distortion (THD) (linear load) | 3% | Storage relative humidity (H-H) | 0 - 95% |
| Total Harmonic Distortion (THD) (non-linear load) | 5% | Operating altitude | 0 - 3000 m |
| EMI/RFI noise filtering | ✓ | Non-operating altitude | 0 - 15000 m |
| Surge protection | ✓ | Certificates | |
| Surge protection features | Fax, Modem, Network, Telephone | Compliance certificates | C-TICK, CE, RCM, RoHS |
| Power protection features | Overload, Short circuit | Packaging content | |
| Audible alarm(s) | ✓ | Rack mount kit | ✓ |
| Audible alarm modes | Battery replacement | Cables included | Serial, USB cable |
| Ports & interfaces | | Manual | ✓ |
| AC outlet types | C13 coupler | | |

| Ports & interfaces | |
|-------------------------------------|--|
| Power plug | C14 coupler |
| AC outlets quantity | 8 AC outlet(s) |
| USB 2.0 ports quantity | 1 |
| Serial interface | ✓ |
| Serial interface type | RS-232 |
| Serial ports quantity | 1 |
| RS-232 ports | 1 |
| Ethernet LAN (RJ-45) ports | 2 |
| Emergency Power Off (EPO) connector | ✓ |
| Battery | |
| Battery technology | Sealed Lead Acid (VRLA) |
| Typical backup time at full load | 6 min |
| Typical backup time at half load | 18 min |
| Battery recharge time | 5 h |
| Sustainability | |
| Sustainability compliance | ✓ |
| Weight & dimensions | |
| Width | 433 mm |
| Depth | 430 mm |
| Height | 88 mm |
| Weight | 18 kg |
| Packaging data | |
| Bundled software | PowerPanel® Business Edition |
| Package width | 575 mm |
| Package depth | 550 mm |
| Package height | 240 mm |
| Package weight | 24.5 kg |
| Logistics data | |
| Harmonized System (HS) code | 8504408590 |
| Warranty period | 3 year(s) |
| Country of origin | China |
| Other features | |
| Battery type | RBP0074 |
| Compatible operating systems | Windows 7 / Vista / XP / 2000, Server 2008 / 2003, Linux |
| Overload protection | ✓ |

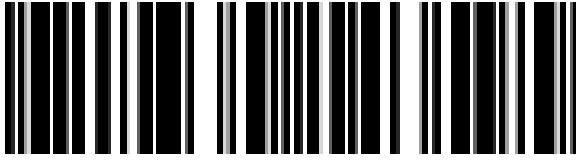

4712364143595

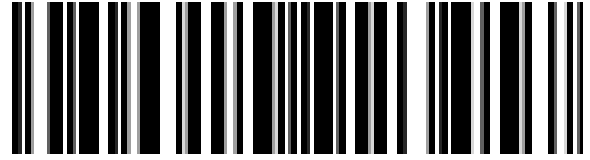

5050914923457

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.