

CyberPower OL1500ERTXL2U UPS Dubbele conversie (online) 1,5 kVA 1350 W 8 AC-uitgang(en)

Merk : CyberPower

Artikelcode: OL1500ERTXL2U

Productnaam : OL1500ERTXL2U




CyberPower OL1500ERTXL2U. UPS-topologie: Dubbele conversie (online), Output power capacity (VA): 1,5 kVA, Uitgangsvermogen: 1350 W. AC outlet types: C13 stekker, Stekker: C14 stekker, Aantal AC uitgangen: 8 AC-uitgang(en). Energie-opslagtechnologie accu/batterij: Sealed Lead Acid (VRLA), Typische backup tijd op volledige lading: 3 min, Typische backup tijd op halve lading: 11 min. Form factor: Rackmontage/toren, Kleur van het product: Zwart, Materiaal behuizing: Metaal. Breedte: 433 mm, Diepte: 430 mm, Hoogte: 88 mm



Features		Battery	
UPS topology *	Double-conversion (Online)	Typical backup time at half load	11 min
Output power capacity *	1.5 kVA	Battery recharge time	5 h
Output power *	1350 W	Hot-swap battery	✓
Waveform *	Pure sine	Cold start	✓
Input operation voltage (min) *	190 V	Design	
Input operation voltage (max) *	300 V	Form factor *	Rackmount/Tower
Input frequency *	40/70 Hz	Housing material	Metal
Output operation voltage (min)	200 V	Rack capacity	2U
Output operation voltage (max)	240 V	Cooling type	Active
Output frequency	50/60 Hz	Built-in fan	✓
Maximum current	7.5 A	Product colour *	Black
Surge energy rating	1780 J	Control type	Buttons
Response time	0 ms	Display type	LCD
Heat dissipation	512 BTU/h	LED indicators	✓
Output power factor	0.9	Operational conditions	
Emergency Power Off (EPO)	✓	Operating temperature (T-T)	0 - 40 °C
Total Harmonic Distortion (THD) (linear load)	3%	Storage temperature (T-T)	-20 - 45 °C
Total Harmonic Distortion (THD) (non-linear load)	5%	Operating relative humidity (H-H)	0 - 90%
EMI/RFI noise filtering	✓	Storage relative humidity (H-H)	0 - 95%
Surge protection	✓	Operating altitude	0 - 3000 m
Surge protection features	Fax, Modem, Network, Telephone	Non-operating altitude	0 - 15000 m
Power protection features	Overload, Short circuit	Technical details	
Audible alarm(s)	✓	Sustainability compliance	✓
Audible alarm modes	Battery replacement	Warranty period	3 year(s)
Country of origin	China	Compliance certificates	C-TICK, CE, RCM, RoHS
Ports & interfaces			

Ports & interfaces	
AC outlet types	C13 coupler
Power plug	C14 coupler
AC outlets quantity	8 AC outlet(s)
USB 2.0 ports quantity	1
Serial interface	✓
Serial interface type	RS-232
Serial ports quantity	1
RS-232 ports	1
Ethernet LAN (RJ-45) ports	2
Emergency Power Off (EPO) connector	✓
Battery	
Battery technology	Sealed Lead Acid (VRLA)
Typical backup time at full load	3 min
Weight & dimensions	
Width	433 mm
Depth	430 mm
Height	88 mm
Weight	18 kg
Package width	575 mm
Package depth	550 mm
Package height	240 mm
Package weight	24.5 kg
Packaging data	
Rack mount kit	✓
Cables included	Serial, USB cable
Manual	✓
Bundled software	PowerPanel® Business Edition
Logistics data	
Harmonized System (HS) code	8504408590
Other features	
Battery type	RBP0074
Compatible operating systems	Windows 7 / Vista / XP / 2000, Server 2008 / 2003, Linux
Overload protection	✓

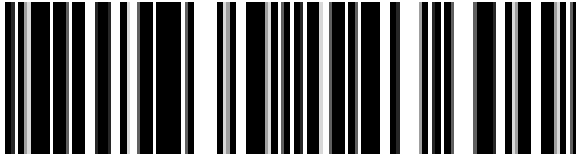

4712364143601

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 16-DEC-2024. Prints or copies of Information are only valid on the printed Publication date