

## CyberPower OL3000ERTXL2U UPS Dubbele conversie (online) 3 kVA 2700 W 9 AC-uitgang(en)

**Merk :** CyberPower

**Artikelcode:** OL3000ERTXL2U

**Productnaam :** OL3000ERTXL2U




CyberPower OL3000ERTXL2U. UPS-topologie: Dubbele conversie (online), Output power capacity (VA): 3 kVA, Uitgangsvermogen: 2700 W. AC outlet types: C13 stekker, C19 stekker, Stekker: C20 stekker, Aantal AC uitgangen: 9 AC-uitgang(en). Energie-opslagtechnologie accu/batterij: Sealed Lead Acid (VRLA), Typische backup tijd op volledige lading: 3 min, Typische backup tijd op halve lading: 11 min. Form factor: Rackmontage/toren, Kleur van het product: Zwart, Materiaal behuizing: Metaal. Breedte: 433 mm, Diepte: 600 mm, Hoogte: 88 mm



Features		Battery	
UPS topology *	Double-conversion (Online)	Typical backup time at half load	11 min
Output power capacity *	3 kVA	Battery recharge time	5 h
Output power *	2700 W	Hot-swap battery	✓
Waveform *	Pure sine	Cold start	✓
Input operation voltage (min) *	190 V	<b>Design</b>	
Input operation voltage (max) *	300 V	Form factor *	Rackmount/Tower
Input frequency *	40/70 Hz	Housing material	Metal
Output operation voltage (min)	200 V	Rack capacity	2U
Output operation voltage (max)	240 V	Cooling type	Active
Output frequency	50/60 Hz	Built-in fan	✓
Maximum current	15 A	Product colour *	Black
Surge energy rating	1335 J	Control type	Buttons
Response time	0 ms	Display type	LCD + LED
Heat dissipation	1139 BTU/h	LED indicators	✓
Output power factor	0.9	<b>Operational conditions</b>	
Emergency Power Off (EPO)	✓	Operating temperature (T-T)	0 - 40 °C
Total Harmonic Distortion (THD) (linear load)	3%	Storage temperature (T-T)	-20 - 45 °C
Total Harmonic Distortion (THD) (non-linear load)	5%	Operating relative humidity (H-H)	0 - 90%
EMI/RFI noise filtering	✓	Storage relative humidity (H-H)	0 - 95%
Surge protection	✓	Operating altitude	0 - 3000 m
Surge protection features	Fax, Modem, Network, Telephone	Non-operating altitude	0 - 15000 m
Power protection features	Overload, Short circuit	<b>Technical details</b>	
Audible alarm(s)	✓	Sustainability compliance	✓
Audible alarm modes	Battery replacement	Warranty period	3 year(s)
Country of origin	China	Compliance certificates	BSMI, RCM, RoHS
<b>Ports &amp; interfaces</b>			

Ports & interfaces		Weight & dimensions	
AC outlet types	C13 coupler, C19 coupler	Width	433 mm
Power plug	C20 coupler	Depth	600 mm
AC outlets quantity	9 AC outlet(s)	Height	88 mm
USB 2.0 ports quantity	1	Weight	32 kg
Serial interface	✓	Package width	565 mm
Serial interface type	RS-232	Package depth	880 mm
Serial ports quantity	1	Package height	240 mm
RS-232 ports	1	Package weight	39.5 kg
Ethernet LAN (RJ-45) ports	2	<b>Packaging data</b>	
Emergency Power Off (EPO) connector	✓	Rack mount kit	✓
<b>Battery</b>		Cables included	Serial, USB cable
Battery technology	Sealed Lead Acid (VRLA)	Manual	✓
Typical backup time at full load	3 min	Bundled software	PowerPanel® Business Edition
		<b>Logistics data</b>	
		Harmonized System (HS) code	8504408590
		<b>Other features</b>	
		Battery type	RBP0076
		Compatible operating systems	Windows 7 / Vista / XP / 2000, Server 2008 / 2003, Linux
		Overload protection	✓

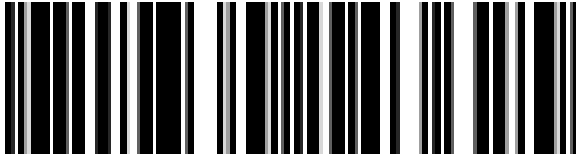

4712364143625

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 16-DEC-2024. Prints or copies of Information are only valid on the printed Publication date