

Shuttle NC40U3 PC/workstation barebone 0.84L sized PC Zwart i3-1215U Intel SoC

Merk : Shuttle

Artikelcode: NC40U3


Productnaam : XPC Nano PC NC40U3, Intel Core i3-1215U, 1x HDMI, 1x DP, 1x USB-C/DP, 6x USB3.2, 1x 2.5" bay, 2x M.2, 1x LAN, RAID, 24/7 permanent gebruik, incl. VESA & Stand

Shuttle NC40U3. Type behuizing: 0.84L sized PC, Producttype: Mini PC barebone. Chipset moederbord: Intel SoC, BIOS type: AMI. Ondersteunde geheugen types: DDR4-SDRAM, Aantal geheugenslots: 2, Maximum intern geheugen: 64 GB. Ondersteunde types opslag-drives: HDD & SSD, Opslag schijf-interface: PCI Express, SATA III. Aantal Ethernet LAN (RJ-45)-poorten: 1. Type koeling: Actief. Netvoeding: 65 W



| Processor | | Expansion slots | |
|------------------------------------|-----------------------------|---------------------------------------|---|
| Processor manufacturer | Intel | PCI Express slots version | 3.0, 4.0 |
| Processor family | Intel® Core™ i3 | Number of M.2 (M) slots | 2 |
| Processor generation | 12th gen Intel® Core™ i3 | Design | |
| Processor model | i3-1215U | Chassis type * | 0.84L sized PC |
| Processor cores | 6 | Product colour * | Black |
| Processor threads | 8 | Cooling type * | Active |
| Performance cores | 2 | On/off switch | ✓ |
| Efficient cores | 4 | LED indicators | HDD, Power |
| Built-in processor * | ✓ | Housing material | Plastic |
| Processor cache | 10 MB | Cable lock slot | ✓ |
| CPU configuration (max) | 1 | Cable lock slot type | Kensington |
| Memory | | VESA mounting | ✓ |
| Memory slots type * | SO-DIMM | Panel mounting interface | 75 x 75, 100 x 100 mm |
| Number of memory slots * | 2 | Product type * | Mini PC barebone |
| Maximum internal memory | 64 GB | Safety | CB IEC60950/62368, cTUVus (UL 62368) |
| Supported memory clock speeds | 3200 MHz | Performance | |
| Supported memory types | DDR4-SDRAM | Motherboard chipset | Intel SoC |
| Memory channels | Dual-channel | Number of processors supported | 1 |
| Memory voltage | 1.2 V | BIOS type | AMI |
| ECC | ✗ | Trusted Platform Module (TPM) | ✓ |
| Non-ECC | ✓ | Trusted Platform Module (TPM) version | 2.0 |
| Storage | | Technical details | |
| Supported storage drive types * | HDD & SSD | Compliance certificates | BSMI, CE, Federal Communications Commission (FCC), RoHS, UKCA |
| Storage drive sizes supported * | 2.5, M.2 | Logistics data | |
| Storage drive interface | PCI Express, Serial ATA III | Harmonized System (HS) code | 84733080 |
| NVMe | ✓ | | |
| Number of storage drives supported | 3 | | |
| Card reader integrated | ✗ | | |

| Graphics | | Software | |
|---|---------------------|-------------------------------------|------------------------|
| On-board graphics card * | ✓ | Windows operating systems supported | Windows 10, Windows 11 |
| Graphics card family | Intel | Linux operating systems supported | ✓ |
| On-board graphics card model | Intel® UHD Graphics | Operating system installed | ✗ |
| Maximum resolution | 7680 x 4320 pixels | | |
| Audio | | Sustainability | |
| Built-in speaker(s) * | ✗ | Sustainability compliance | ✓ |
| | | Sustainability certificates | ENERGY STAR, ErP |
| Network | | Power | |
| Ethernet LAN * | ✓ | Power supply type * | External AC adapter |
| Wi-Fi * | ✗ | Power supply | 65 W |
| LAN controller | Intel® I219 | Number of power supply units | 1 |
| Ports & interfaces | | AC input voltage | 100 - 240 V |
| USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity * | 4 | AC input frequency | 50/60 Hz |
| USB 3.2 Gen 1 (3.1 Gen 1) Type-C ports quantity | 1 | AC adapter output voltage | 19 V |
| USB 3.2 Gen 2 (3.1 Gen 2) Type-A ports quantity | 2 | AC adapter output current | 3.42 A |
| HDMI ports quantity * | 1 | Operational conditions | |
| HDMI version | 2.0b | Operating temperature (T-T) | 0 - 40 °C |
| DisplayPorts quantity | 1 | Operating relative humidity (H-H) | 10 - 90% |
| DisplayPort version | 1.4a | Weight & dimensions | |
| Microphone in | ✓ | Width | 142 mm |
| Headphone outputs | 1 | Depth | 142 mm |
| Ethernet LAN (RJ-45) ports * | 1 | Height | 42 mm |
| DC-in jack | ✓ | Weight | 400 g |
| | | Package weight | 1.2 kg |
| | | Packaging content | |
| | | Power cord included | ✓ |
| | | AC adapter included | ✓ |
| | | Quick start guide | ✓ |
| | | Drivers included | ✓ |

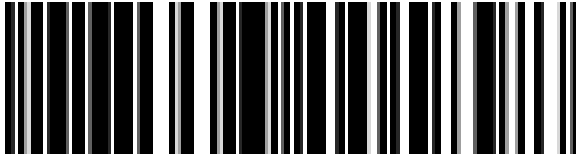

0887993005898



887993005898

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 16-DEC-2024. Prints or copies of Information are only valid on the printed Publication date