

## CyberPower UT800EIG UPS Line-interactive 0,8 kVA 450 W 4 AC-uitgang(en)

**Merk :** CyberPower


**Artikelcode:** UT800EIG

**Productnaam :** UT800EIG

CyberPower UT800EIG. UPS-topologie: Line-interactive, Output power capacity (VA): 0,8 kVA, Uitgangsvermogen: 450 W. AC outlet types: C13 stekker, Aantal AC uitgangen: 4 AC-uitgang(en), Bekabelingstechnologie: 10/100/1000Base-T(X). Energie-opslagstechnologie accu/batterij: Sealed Lead Acid (VRLA), Accu/Batterij oplaadtijd: 6 uur. Form factor: Tower, Kleur van het product: Zwart, Materiaal behuizing: Plastic. Breedte: 84 mm, Diepte: 280 mm, Hoogte: 174 mm



Kenmerken		Accu/Batterij	
UPS-topologie *	Line-interactive	Accu/Batterij oplaadtijd	6 uur
Output power capacity (VA) *	0,8 kVA	<b>Design</b>	
Uitgangsvermogen *	450 W	Vormfactor *	Tower
Ingang operation voltage (min) *	165 V	Materiaal behuizing	Plastic
Ingang operation voltage (max) *	290 V	Lengte snoer	1,2 m
Frequentie *	50 Hz	Kleur van het product *	Zwart
Uitgang operation voltage (min)	230 V	LED-indicatoren	✓
Uitgang operation voltage (max)	230 V	Certificering	RoHS
Output frequentie	50/60 Hz	<b>Eisen aan de omgeving</b>	
Stroom (max.)	3,47 A	Temperatuur, in bedrijf	0 - 40 °C
Surge energy rating	150 J	Temperatuur bij opslag	-20 - 50 °C
Responstijd	4 ms	Relatieve luchtvochtigheid, in bedrijf	0 - 90 procent
Stroomspanning bescherming	Overbelasting	Luchtvochtigheid bij opslag	0 - 90 procent
Land van herkomst	China	Hoogte, in bedrijf	0 - 3000 m
<b>Poorten &amp; interfaces</b>		Hoogte bij opslag	0 - 3000 m
Stopcontacttypes	C13 stekker	<b>Gewicht en omvang</b>	
Aantal AC uitgangen	4 AC-uitgang(en)	Breedte	84 mm
USB-poort	✓	Diepte	280 mm
Aantal USB 2.0-poorten	1	Hoogte	174 mm
Modem (RJ-11) poort	1	Gewicht	4,2 kg
Aantal Ethernet LAN (RJ-45)-poorten	1	Breedte van de verpakking	109 mm
Bekabelingstechnologie	10/100/1000Base-T(X)	Diepte van de doos	315 mm
<b>Accu/Batterij</b>		Hoogte van de verpakking	229 mm
Energie-opslagstechnologie accu/batterij	Sealed Lead Acid (VRLA)	Gewicht pakket	4,47 kg
<b>Verpakking</b>			
		Meegeleverde kabels	USB-kabel
<b>Logistics data</b>			
		Code geharmoniseerd systeem (HS) 8504408590	

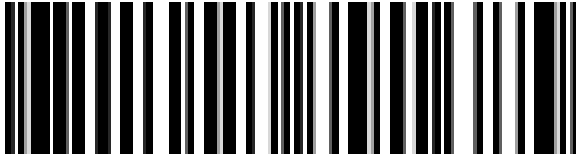

4711027791685

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 18-OCT-2024. Prints or copies of Information are only valid on the printed Publication date