Kodak S3060 ADF-scanner 600 x 600 DPI A3 Zwart, Wit

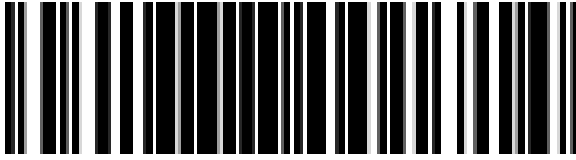**Merk :** Kodak Alaris   **Productfamilie:** Kodak   **Artikelcode:** 8001711

Productnaam : S3060

Kodak S3060. Maximum scanformaat: 305 x 4060 mm, Optische scanresolutie: 600 x 600 DPI, Kleurdiepte invoer: 48 Bit. Soort scanner: ADF-scanner, Kleur van het product: Zwart, Wit, Beeldscherm: LCD. Type beeldsensor: Dual CIS, Dagelijkse diensten cyclus (max): 25000 pagina's, Lichtbron: RGB LED. Capaciteit automatische documentinvoer: 300 vel. Maximale ISO A-series papierformaat: A3, Mediagewicht, automatische doorvoer: 27 - 433 g/m²

Scanning

Maximum scan size *	305 x 4060 mm
Optical scanning resolution *	600 x 600 DPI
Colour scanning	✔
Duplex scanning *	✔
Input colour depth	48 bit
Output colour depth	24 bit
Output greyscale depth	8 bit
ADF scan speed (b/w, A4)	60 ppm

Design

Scanner type *	ADF scanner
Product colour *	Black, White
Display	LCD
Display diagonal	8.89 cm (3.5")
Touchscreen	✔
Colour display	✔
Built-in display *	✔

Performance

Sensor type *	Dual CIS
Light source	RGB LED
Scan file formats	DOC, JPEG, PDF, PNG, RTF, TIFF, XLS
Daily duty cycle (max) *	25000 pages
Scan drivers	ISIS, Kofax VRS, TWAIN, WIA
Barcode reader	✔
Scanning noise level	60 dB

Input capacity

Auto document feeder (ADF) input capacity	300 sheets

Paper handling

Maximum ISO A-series paper size *	A3
Auto Document Feeder (ADF) media weight	27 - 433 g/m²

Power

Power supply type *	AC
Power consumption (typical)	50 W
Power consumption (standby)	0.3 W
AC input frequency	50 - 60 Hz
Input voltage	100 - 240 V
Power consumption (sleep)	4 W

Weight & dimensions

Width	457.2 mm
Depth	370.8 mm
Height	254 mm
Weight	15.3 kg

Packaging content

Bundled software	Capture Pro Limited Edition Smart Touch

Sustainability

Sustainability certificates	ENERGY STAR, EPEAT Gold

Ports & interfaces

USB port *	✔
USB version	3.2 Gen 1 (3.1 Gen 1)

Network

Ethernet LAN	✔
Supported network protocols	TCP/IP, DHCP

System requirements

Windows operating systems supported	Windows 10, Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 IOT Core, Windows 10 IoT Enterprise, Windows 10 Pro, Windows 10 Pro x64, Windows 10 x64, Windows 7, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 7 x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64
Linux operating systems supported	Ubuntu 16.04, Ubuntu 18.04 LTS
Server operating systems supported	Windows Server 2012 x64, Windows Server 2016 x64, Windows Server 2019

Operational conditions

Operating temperature (T-T)	10 - 35 °C
Operating relative humidity (H-H)	15 - 80%

Other features

Recommended system requirements	Intel Core i3 3.5 GHz+, USB port 3.0/2.0, 3.43 GB RAM+
Ethernet LAN data rates	10,100,1000 Mbit/s
Minimum scan size	63.5 x 71.1
Certification	S mark, RCM, cTUVus & ICES-003, CCC, CE, GS Mark, BIS, VCCI, NOM, EAC, KS, BSMI

Technical details

Linear (1D) barcodes supported	Codabar, Code 128, Code 3 of 9, EAN-13, EAN-8, Interleaved 2 of 5, PDF417, UPC-A, UPC-E

Logistics data

Harmonized System (HS) code	84716070

0041778001714

041778001714