

# PRO Series

PRO MP341CQ (3PB2) PRO MP341CQW (3PB2)

User Guide

### Contents

Getting Started
Package Contents
Installing the Monitor Stand
Adjusting the Monitor5
Monitor Overview
Connecting the Monitor to PC7
OSD Setup 8
OSD Keys
OSD Menus
Luminance
Image Setup11
Color Temp
OSD Setup
Extra
Specifications
Preset Display Modes
Troubleshooting
Safety Instructions
TÜV Rheinland Certification20
Regulatory Notices

#### Revision

V1.1, 2024/05

### **Getting Started**

This chapter provides you with the information on hardware setup procedures. While connecting devices, be careful in holding the devices and use a grounded wrist strap to avoid static electricity.

#### **Package Contents**


Monitor	PRO MP341CQ PRO MP341CQW
Documentation	Quick Start Guide
Accessories	Stand with Screw(s)
	Stand Base with Screw(s)
	Stand Cover
	Power Cord
Cables	Premium High Speed HDMI™ Cable (Optional)

### Important

- Contact your place of purchase or local distributor if any of the items is damaged or missing.
- Package contents may vary by country.
- The included power cord is exclusively for this monitor and should not be used with other products.

#### Installing the Monitor Stand

- 1. Leave the monitor in its protective foam packaging. Align the stand bracket to the monitor groove.
- 2. Tighten the stand bracket with screws.
- 3. Connect the base to the stand and tighten the base screw to secure the base.
- 4. Align and push the stand cover towards the monitor groove until it locks in place.
- **5.** Make sure the stand assembly is properly installed before setting the monitor upright.

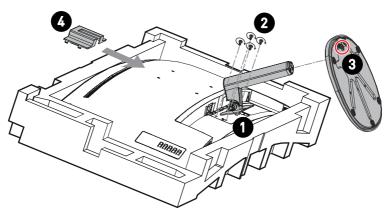

### Important

- Remove the screws on the monitor groove if needed before installing the stand.
- Place the monitor on a soft, protected surface to avoid scratching the display panel.
- Do not use any sharp objects on the panel.
- This product comes with NO protective film to be removed by the user! Any mechanical damages to the product including removal of the polarizing film may affect the warranty!



#### Adjusting the Monitor


This monitor is designed to maximize your viewing comfort with its adjustment capabilities.

### Important

Avoid touching the display panel when adjusting the monitor.




#### **Monitor Overview**

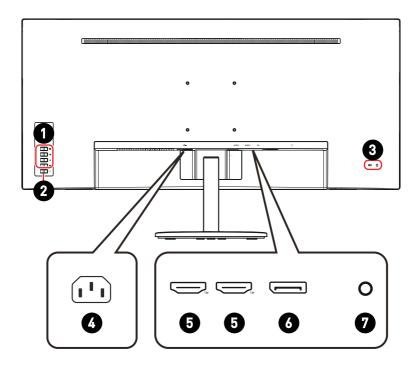

0	OSD Keys
2	Power Button
3	Kensington Lock
4	Power Jack
5	
	Supports 3440x1440@100Hz as specified in HDMI™ 2.0b.
6	DisplayPort
	Supports 3440x1440@100Hz as specified in DisplayPort 1.2a.
7	Headphone Jack

#### **Connecting the Monitor to PC**

- 1. Turn off your computer.
- 2. Connect the video cable from the monitor to your computer.
- 3. Connect the power cord to the monitor power jack. (Figure A)
- 4. Plug the power cord into the electrical outlet. (Figure B)
- 5. Turn on the monitor. (Figure C)
- 6. Power on the computer and the monitor will auto detect the signal source.

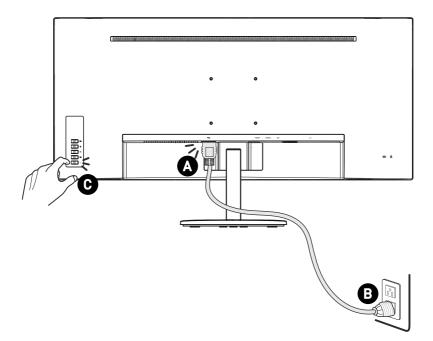

### **OSD Setup**


This chapter provides you with essential information on OSD Setup.



All information is subject to change without prior notice.

#### **OSD** Keys

The monitor comes with a set of OSD Keys that help to control the On-Screen Display (OSD) menu.

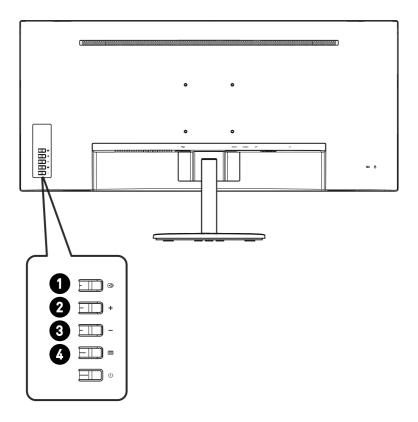

OSD I	Keys	Hot Key (When OSD is OFF)	OSD Setup (When OSD is ON)
0	SOURCE / EXIT	<ul> <li>Selecting the video input from external sources</li> </ul>	<ul> <li>Returning to the previous menu</li> </ul>
			• Exiting from the OSD Main Menu
2	VOLUME / +	<ul> <li>Activating the Volume control</li> </ul>	
3	Eco Mode / -	• Activating Eco Mode	<ul> <li>Adjusting function values</li> </ul>
6	MENU / ENTER	<ul> <li>Activating the OSD Main Menu</li> </ul>	• Confirming the selection
		• To lock/unlock the OSD, press and hold the MENU button while the monitor is off and then press the power button to turn the monitor on.	

### **OSD Menus**

n.	Lumit	nance
	Contrast	50
1	Brightness	50
	Eco Mode	Standard
-	Eco Friendly	On
1	DCR	011

#### Luminance

1st Level Menu	2nd Level Menu	Description
Contrast	0-100	• Adjusting display contrast. This function is available in Standard mode.
Brightness	0-100	• Adjusting display brightness. This function is available in Standard mode.
Eco Mode	Standard	• Activating the following function will affect
	Text	Activated Function Eco Mode Status
	Internet	» DCR Set to Standard & unable to select
	Game	
	Movie	
	Sports	
	sRGB	
Eco Friendly	ON	• This function adjusts the monitor backlight
	OFF	to improve energy efficiency.

1st Level Menu	2nd Level Menu	Description	
DCR	ON	• DCR enhances in the contrast of in	nage quality by increasing nages.
	OFF	Activating DCR will affect:	
		Affected Function	Function Status
		» Contrast » Brightness » Eco Mode	Unable to select

#### Image Setup

1st Level Menu	2nd Level Menu	Description	
Image Ratio	Wide	• Selecting the Image Aspect Ratio	
	4:3		
Overdrive	Normal	• Deactivating the function	response time overdrive
	Fast	5	ill shorten the response prove blurred images t games.
	Fastest	response time ar images when pla	t will reach the shortest nd help improve blurred ying very fast games. y occur when Overdrive is
Adaptive-Sync	ON	• Adaptive-Sync prevents screen tearing.	
	OFF	Activating Adaptive-Sync will affect:	
		Affected Function	Function Status
		» MPRT	Set to OFF
MPRT	ON	• MPRT is available when the refresh rate is	
	OFF	over 85 Hz. • Activating MPRT	will affect:
		Affected Function	Function Status
		» Brightness » Overdrive	Unable to select
		» Adaptive-Sync » DCR	Set to OFF

#### Color Temp.

1st Level Menu	2nd Level Menu	Description	
Warm		• Setting Warm Color Temperature to default	
Normal		<ul> <li>Setting Normal Color Temperature to default</li> </ul>	
Cool		• Setting Cool Color Temperature to default	
User	R (0-100)	• Adjusting the Red Gain	
	G (0-100)	• Adjusting the Green Gain	
	B (0-100)	• Adjusting the Blue Gain	
Low Blue Light	OFF	• Low Blue Light protects your eyes against	
	ON	blue light. When enabled, Low Blue Light adjusts the screen color temperature to a more yellow glow.	

#### **OSD Setup**

1st Level Menu	2nd Level Menu	Description
H. Position	0-100	• Adjusting the horizontal position of OSD
V. Position	0-100	• Adjusting the vertical position of OSD
Timeout	5-100	• Adjusting the OSD timeout
Language	English	• Selecting the OSD language
	Español	
	Français	
	Português	
	Русский	
	简体中文	
	繁體中文	
	한국어	
	(More languages coming soon)	

#### Extra

1st Level Menu	2nd Level Menu	Description
Input Select	Auto	• Selecting the video input source
	HDMI™1	
	HDMI™2	
	DisplayPort	
DDC/CI	ON	• Turning on/off the DDC/CI support
	OFF	
HDMI™ CEC	OFF	HDMI™ CEC (Consumer Electronics
	ON	Control) supports Sony PlayStation®, Nintendo® Switch™, Xbox Series X S consoles and various audio-visual devices that are CEC-capable.
		<ul> <li>If HDMI™ CEC is set to ON:</li> </ul>
		<ul> <li>The monitor will automatically power on when the CEC device is turned on.</li> </ul>
		• The CEC device will enter power saving mode when the monitor is turned off.
Reset	YES	Resetting and restoring settings to original
	NO	OSD defaults
Information		• Showing the information of the main image source

### **Specifications**

Monitor	PRO MP341CQ, PRO MP341CQW
Size	34 inch
Curvature	1500R
Panel Type	VA
Resolution	3440 x 1440
Aspect Ratio	21:9
Brightness (nits)	300 (Тур.)
Contrast Ratio	3000:1
Refresh Rate	100Hz
Response Time	• 1ms (MPRT) • 4ms (GTG)
I/O	<ul> <li>HDMI<sup>™</sup> Connector x2</li> <li>DisplayPort x1</li> <li>Headphone Jack x1</li> </ul>
View Angles	178°(H) , 178°(V)
DCI-P3*/ sRGB	91.96% / 116.25%
Surface Treatment	Anti-glare
Display Colors	1.07B (8bit + FRC)
Speaker	2 x 2W
Monitor Power Options	100~240Vac, 50~60Hz, 1.5A
Power Consumption	Power On < 60W Standby < 0.5W Power Off < 0.3W
Adjustment (Tilt)	-3.5° ~ 21.5°
Kensington Lock	Yes

Monitor		PRO MP341CQ, PRO MP341CQW		
VESA Mounting		<ul> <li>Plate Type: 100 x 100 mm</li> <li>Screw Type: M4 x 10 mm</li> <li>Thread Diameter: 4 mm</li> <li>Thread Pitch: 0.7 mm</li> <li>Thread Length: 10 mm</li> </ul>		
Dimension (W x H x D)		809.3 x 469.5 x 237 mm		
Weight		7.7 Kg (Net) 10.3 Kg (Gross)		
Environment Operatio		<ul> <li>Temperature: 0°C ~ 40°C</li> <li>Humidity: 20% ~ 90%, non-condensing</li> <li>Altitude: 0 ~ 5000m</li> </ul>		
	Storage	<ul> <li>Temperature: -20°C ~ 60°C</li> <li>Humidity: 10% ~ 90%, non-condensing</li> </ul>		

\* Based on CIE1976 test standards.

### **Preset Display Modes**

### Important

All information is subject to change without prior notice.

Standard	Resolution		HDMI™	DP
VGA	640x480	@60Hz	V	V
		ାର୍ପ୍ତମ୍ମz	V	V
		ଗ72Hz	V	V
		ି 075Hz	V	V
Dos-Mode	720x480	@60Hz	V	V
	720x576	@50Hz	V	V
SVGA	800x600	@56Hz	V	V
		@60Hz	V	V
		(d72Hz	V	V
		(ଗ75Hz	V	V
XGA	1024x768	ପ60Hz	V	V
		ା ପମ୍ପମ ସ	V	V
		ପ75Hz	V	V
SXGA	1280x1024	@60Hz	V	V
		ି 075Hz	V	V
WXGA+	1440x900	ାର ୧୦୦୫ ଅ	V	V
WSXGA+	1680x1050	ାର ୧୦୦୫ ଅ	V	V
Full HD	1920x1080	ାର ୧୦୦୫ ଅ	V	V
QHD	2560x1440	ାର ୧୦୦୫ ଅ	V	V
		@100Hz		V
WQHD	3440x1440	ଗ୍ର20Hz	V	
		ର60Hz	V	V
		@100Hz	V	V
Video	480P		V	V
Timing Resolution	720P		V	V
	1080P	@60Hz	V	V
	2560x1080P	ଜ60Hz	V	V
	2160P	@30Hz	V	
		୍ଷ50Hz	V	
		ଜ60Hz	V	

### Troubleshooting

#### The power LED is off.

- Press the monitor power button again.
- Check if the monitor power cable is properly connected.

#### No image.

- Check if the computer graphics card is properly installed.
- Check if the computer and monitor are connected to electrical outlets and are turned on.
- Check if the monitor signal cable is properly connected.
- The computer may be in Standby mode. Press any key to activate the monitor.

#### The screen image is not properly sized or centered.

• Refer to Preset Display Modes to set the computer to a setting suitable for the monitor to display.

#### No Plug & Play.

- Check if the monitor power cable is properly connected.
- Check if the monitor signal cable is properly connected.
- Check if the computer and graphics card are Plug & Play compatible.

#### The icons, font or screen are fuzzy, blurry or have color problems.

- Avoid using any video extension cables.
- Adjust brightness and contrast.
- Adjust RGB color or tune color temperature.
- Check if the monitor signal cable is properly connected.
- Check for bent pins on the signal cable connector.

#### The monitor starts flickering or shows waves.

- Change the refresh rate to match the capabilities of your monitor.
- Update your graphics card drivers.
- Keep the monitor away from electrical devices that may cause electromagnetic interference (EMI).

### **Safety Instructions**

- Read the safety instructions carefully and thoroughly.
- All cautions and warnings on the device or User Guide should be noted.
- Refer servicing to qualified personnel only.

#### Power

- Make sure that the power voltage is within its safety range and has been adjusted properly to the value of 100~240V before connecting the device to the power outlet.
- If the power cord comes with a 3-pin plug, do not disable the protective earth pin from the plug. The device must be connected to an earthed mains socket-outlet.
- Please confirm the power distribution system in the installation site shall provide the circuit breaker rated 120/240V, 20A (maximum).
- Always disconnect the power cord or switch the wall socket off if the device would be left unused for a certain time to achieve zero energy consumption.
- Place the power cord in a way that people are unlikely to step on it. Do not place anything on the power cord.
- If this device comes with an adapter, use only the MSI provided AC adapter approved for use with this device.

#### Environment

- To reduce the possibility of heat-related injuries or of overheating the device, do not place the device on a soft, unsteady surface or obstruct its air ventilators.
- Use this device only on a hard, flat and steady surface.
- To prevent the device from tipping over, secure the device to a desk, wall or fixed object with an anti-tip fastener that helps to properly support the device and keep it safe in place.
- To prevent fire or shock hazard, keep this device away from humidity and high temperature.
- Do not leave the device in an unconditioned environment with a storage temperature above 60°C or below -20°C, which may damage the device.
- The maximum operating temperature is around 40°C.
- When cleaning the device, be sure to remove the power plug. Use a piece of soft cloth rather than industrial chemical to clean the device. Never pour any liquid into the opening; that could damage the device or cause electric shock.
- Always keep strong magnetic or electrical objects away from the device.

- If any of the following situations arises, get the device checked by service personnel:
  - The power cord or plug is damaged.
  - Liquid has penetrated into the device.
  - The device has been exposed to moisture.
  - The device does not work well or you can not get it working according to the User Guide.
  - The device has dropped and damaged.
  - The device has obvious sign of breakage.

## **TÜV Rheinland Certification**

#### **TÜV Rheinland Low Blue Light Certification**

Blue light has been shown to cause eye fatigue and discomfort. MSI now offers monitors with TÜV Rheinland Low Blue Light certification to ensure users' eye comfort and well-being. Please follow the instructions below to reduce the symptoms from extended exposure to the screen and blue light.

- Place the screen 20 28 inches (50 70 cm) away from your eyes and a little below eye level.
- Consciously blinking the eyes every now and then will help to reduce eye strain after extended screen time.
- Take breaks for 20 minutes every 2 hours.
- Look away from the screen and gaze at a distant object for at least 20 seconds during breaks.
- Make stretches to relieve body fatigue or pain during breaks.
- Turn on the optional Low Blue Light function.

#### **TÜV Rheinland Flicker Free Certification**

- TÜV Rheinland has tested this product to ascertain whether the display produces visible and invisible flicker for the human eye and therefore strains the eyes of users.
- TÜV Rheinland has defined a catalogue of tests, which sets out minimum standards at various frequency ranges. The test catalogue is

at various frequency ranges. The test catalogue is based on internationally applicable standards or standards common within the industry and exceeds these requirements.

- The product has been tested in the laboratory according to these criteria.
- The keyword "Flicker Free" confirms that the device has no visible and invisible flicker defined in this standard within the range of 0 3000 Hz under various brightness settings.
- The display will not support Flicker Free when Anti Motion Blur/MPRT is enabled. (The availability of Anti Motion Blur/MPRT varies by products.)





### **Regulatory Notices**

#### **CE Conformity**

This device complies with the requirements set out in the Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility (2014/30/EU), Low-voltage Directive (2014/35/EU), ErP Directive (2009/125/EC) and RoHS directive

(2011/65/EU). This product has been tested and found to comply with the harmonized standards for Information Technology Equipment published under Directives of Official Journal of the European Union.

#### FCC-B Radio Frequency Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy



F

and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the measures listed below:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

#### Notice 1

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

#### Notice 2

Shielded interface cables and AC power cord, if any, must be used in order to comply with the emission limits.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- **2.** This device must accept any interference received, including interference that may cause undesired operation.

#### MSI Computer Corp.

901 Canada Court, City of Industry, CA 91748, USA (626) 913-0828 www.msi.com

#### WEEE Statement

Under the European Union ("EU") Directive on Waste Electrical and Electronic Equipment, Directive 2012/19/EU, products of "electrical and electronic equipment" cannot be discarded as municipal waste anymore and manufacturers of covered electronic equipment will be obligated to take back such products at the end of their useful life.



#### **Chemical Substances Information**

In compliance with chemical substances regulations, such as the EU REACH Regulation (Regulation EC No. 1907/2006 of the European Parliament and the Council), MSI provides the information of chemical substances in products at: https://csr.msi.com/global/index

#### **RoHS Statement**

#### Japan JIS C 0950 Material Declaration

A Japanese regulatory requirement, defined by specification JIS C 0950, mandates that manufacturers provide material declarations for certain categories of electronic products offered for sale after July 1, 2006.

https://csr.msi.com/global/Japan-JIS-C-0950-Material-Declarations

#### India RoHS

This product complies with the "India E-waste (Management and Handling) Rule 2016" and prohibits use of lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers in concentrations exceeding 0.1 weight % and 0.01 weight % for cadmium, except for the exemptions set in Schedule 2 of the Rule.

#### **Turkey EEE Regulation**

Conforms to the EEE Regulations of the Republic Of Turkey

#### **Ukraine Restriction of Hazardous Substances**

The equipment complies with requirements of the Technical Regulation, approved by the Resolution of Cabinet of Ministry of Ukraine as of 10 March 2017,  $\mathbb{N}^{\circ}$  139, in terms of restrictions for the use of certain dangerous substances in electrical and electronic equipment.

#### Vietnam RoHS

As from December 1, 2012, all products manufactured by MSI comply with Circular 30/2011/TT-BCT temporarily regulating the permitted limits for a number of hazardous substances in electronic and electric products.

#### **Green Product Features**

- Reduced energy consumption during use and stand-by
- Limited use of substances harmful to the environment and health
- Easily dismantled and recycled
- Reduced use of natural resources by encouraging recycling
- Extended product lifetime through easy upgrades
- Reduced solid waste production through take-back policy

#### **Environmental Policy**

- The product has been designed to enable proper reuse of parts and recycling and should not be thrown away at its end of life.
- Users should contact the local authorized point of collection for recycling and disposing of their end-of-life products.
- Visit the MSI website and locate a nearby distributor for further recycling information.
- Users may also reach us at gpcontdev@msi.com for information regarding proper disposal, take-back, recycling, and disassembly of MSI products.

#### Warning!

Overuse of screens is likely to affect eyesight.

#### **Recommendations:**

- 1. Take a 10-minute break for every 30 minutes of screen time.
- Children under 2 years of age should have no screen time. For children aged 2 years and over, screen time should be limited to less than one hour per day.

#### **Copyright and Trademarks Notice**



Copyright © Micro-Star Int'l Co., Ltd. All rights reserved. The MSI logo used is a registered trademark of Micro-Star Int'l Co., Ltd. All other marks and names mentioned may be trademarks of their respective owners. No warranty as to accuracy or completeness is expressed or implied. MSI reserves the right to make changes to this document without prior notice.

The terms HDMI<sup>TM</sup>, HDMI<sup>TM</sup> High-Definition Multimedia Interface, HDMI<sup>TM</sup> Trade dress and the HDMI<sup>TM</sup> Logos are trademarks or registered trademarks of HDMI<sup>TM</sup> Licensing Administrator, Inc.

#### **Technical Support**

If a problem arises with your product and no solution can be obtained from the user's manual, please contact your place of purchase or local distributor. Alternatively, please visit https://www.msi.com/support/ for further guidance.

