APC Smart- 3000VA UPS Line-interactive 3 kVA 2700 W 9 AC-uitgang(en)

Merk : APC

Artikelcode: SMT3000RMI2UNC

Productnaam : APC Smart-UPS SMT3000RMI2UNC - 8x C13, 1x C19, USB, Rackmount 2U, NMC, 3000VA
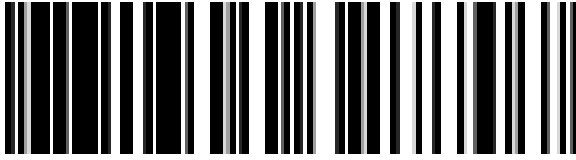
- 3kVA/2,7kW lijn interactieve pure sinusgolf 2U UPS voor rekmontage
- Ideaal voor servers, opslag, netwerkkasten, zakelijke VoIP, retail POS
- De automatische spanningsregeling helpt bij het corrigeren van de netspanning
- Vooraf geïnstalleerde netwerkbeheerkaart voor netwerkgebaseerde UPS-bewaking en -beheer
- Gecontroleerde uitschakeling van fysieke servers, virtuele machines en HCI-clusters
APC Smart-UPS SMT3000RMI2UNC - 8x C13, 1x C19, USB, Rackmount 2U, NMC, 3000VA

Features

UPS topology *	Line-Interactive
Output power capacity *	3 kVA
Output power *	2700 W
Waveform *	Sine
Input operation voltage (min) *	151 V
Input operation voltage (max) *	302 V
Input frequency *	50/60 Hz
Output operation voltage (min)	220 V
Output operation voltage (max)	240 V
Output frequency	50/60 Hz
Surge energy rating	320 J
Response time	4 ms
Emergency Power Off (EPO)	O
Noise level	55 dB
Surge protection	✔
Audible alarm(s)	✔
Web-based management	✔
Audible alarm modes	Battery replacement
Auto-restart	✔

Ports & interfaces

AC outlet types	C13 coupler, C19 coupler, C20 coupler
Power plug	C20 coupler
AC outlets quantity	9 AC outlet(s)
USB 2.0 ports quantity	1

Battery

Battery technology	Sealed Lead Acid (VRLA)
Battery capacity	547 Ah
Battery recharge time	3 h
Hot-swap battery	✔
Automatic battery test	✔
Cold start	✔

Design

Form factor *	Rackmount

Design

Product colour *	Black
Display type	LCD
LED indicators	✔

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-15 - 45 °C
Operating relative humidity (H-H)	0 - 95%
Storage relative humidity (H-H)	0 - 95%
Operating altitude	0 - 3000 m
Non-operating altitude	0 - 15000 m

Certificates

Compliance certificates	RoHS
Certification	CE, EAC, EN/IEC 62040-1, EN/IEC 62040-2, GS Mark, IRAM, RCM, VDE, WEEE

Packaging content

Rack mount kit	✔
Cables included	Input power cable, USB cable
Quick installation guide	✔

Sustainability

Sustainability certificates	Green Premium

Weight & dimensions

Width	480 mm
Depth	683 mm
Height	86 mm
Weight	44.2 kg

Packaging data

Resource CD	✔
Package width	600 mm
Package depth	980 mm
Package height	254 mm
Package weight	51.6 kg

Design			Logistics data	
Rack capacity	2U		Products per pallet	8 pc(s)
Cable length	2 m		Harmonized System (HS) code	85078000
			Total carbon footprint (kg of CO2e)	2958.37

Other features

Output voltage	230 V

0731304327707

731304327707