



## iiyama TF6539UHSC-B1AG Signage Display Interactief flatscreen 165,1 cm (65") LCD 500 cd/m<sup>2</sup> 4K Ultra HD Zwart Touchscreen


**Merk :** iiyama

**Artikelcode:** TF6539UHSC-B1AG

**Productnaam :** TF6539UHSC-B1AG

iiyama TF6539UHSC-B1AG. Productontwerp: Interactief flatscreen. Beeldschermdiagonaal: 165,1 cm (65"), Display technologie: LCD, Resolutie: 3840 x 2160 Pixels, Helderheid: 500 cd/m<sup>2</sup>, HD type: 4K Ultra HD, Touchscreen. Kleur van het product: Zwart

Display		Performance	
Panel type	IPS	Mean time between failures (MTBF)	50000 h
LED backlight	✓	<b>Power</b>	
Display diagonal *	165.1 cm (65")	Power consumption (typical) *	175 W
Display technology *	LCD	Power consumption (standby) *	0.5 W
Display resolution *	3840 x 2160 pixels	Power consumption (off)	0.5 W
Display brightness *	500 cd/m <sup>2</sup>	AC input voltage	100 - 240 V
HD type *	4K Ultra HD	AC input frequency	50 - 60 Hz
Touchscreen *	✓	Energy efficiency scale	A to G
Number of simultaneous touchpoints	50	<b>Weight &amp; dimensions</b>	
Response time	8 ms	Width	1503.5 mm
Contrast ratio (typical)	1100:1	Depth	67 mm
Viewing angle, horizontal	178°	Height	880.5 mm
Viewing angle, vertical	178°	Weight	56 kg
Display number of colours	16.78 million colours	<b>Packaging data</b>	
<b>Ports &amp; interfaces</b>		Package width	1670 mm
HDMI ports quantity *	2	Package depth	310 mm
HDMI version	1.4/2.0	Package height	1020 mm
DisplayPorts quantity *	1	Package weight	65 kg
DisplayPort version	1.2	<b>Packaging content</b>	
Ethernet LAN (RJ-45) ports	1	Cables included	AC, DisplayPort, HDMI, USB
<b>Audio</b>		<b>Operational conditions</b>	
Built-in speaker(s) *	✓	Operating temperature (T-T)	0 - 40 °C
Number of built-in speakers	2	Storage temperature (T-T)	-20 - 60 °C
<b>Design</b>		<b>Certificates</b>	
Product design *	Interactive flat panel	Certification	CE, EAC, RoHS support, ErP, WEEE, cULus, REACH, UKCA
Product colour *	Black	<b>Technical details</b>	
VESA mounting *	✓	Sustainability certificates	ErP
Panel mounting interface	600 x 400 mm	Compliance certificates	CE, REACH, RoHS, WEEE
<b>Performance</b>		<b>Other features</b>	
Purpose *	Commercial	Quick start guide	✓
HDCP	✓		

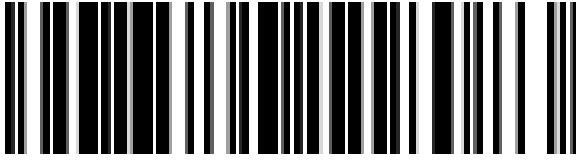

4948570118083

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 25-MAR-2025. Prints or copies of Information are only valid on the printed Publication date